

PROFESSIONAL LAND SURVEYORS

- BUILDING PLANS
- LOTS & FARM SURVEYS
- SUB-DIVISIONS
- LAND PLANNING
- CONSTRUCTION


SEYMOUR & ASSOCIATES




P.O. BOX 624
LOGAN, OHIO 43138
385-5954

PLAT OF SURVEY OF TRACT IN
THE SOUTHWEST QUARTER OF
SECTION 16, T13N, R16W,
GREEN TOWNSHIP
HECKING COUNTY
OHIO

GREEN 16

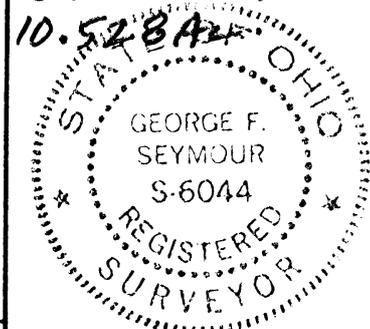


SURVEY FOR: DONALD MOORE



LEGEND

- ▲ = 5/16" x 30" I.P. PIN W/ PLASTIC I.D. CAP STAMPED "SEYMOUR & ASSOC." SET
- = STONE FOUND
- = FENCE POST
- = POINT

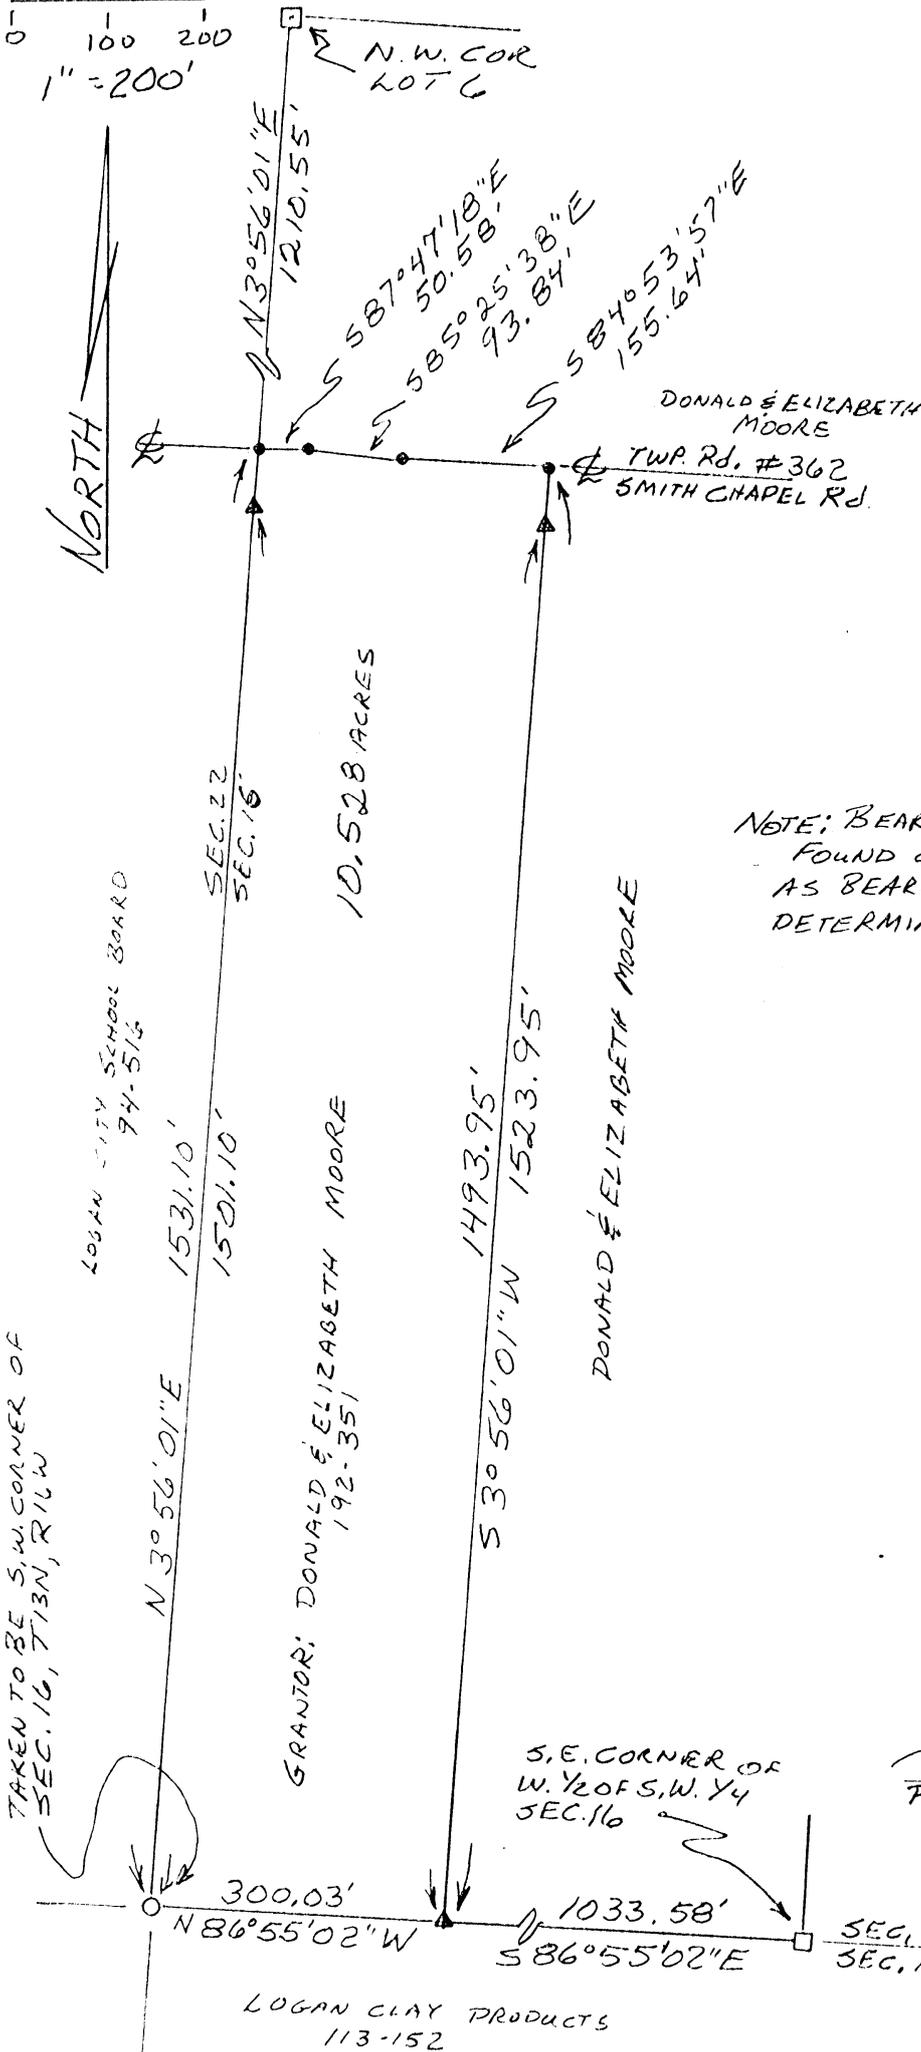

NOTE: BEARINGS DERIVED FROM MONUMENTS FOUND ON THE WEST LINE OF SEC. 16 AS BEARING N3°56'01"E AND ARE FOR THE DETERMINATION OF ANGLES ONLY

REFERENCES

JAY PLATS
DEEDS AS NOTED
PREVIOUS SURVEYS

Approved Mathematically
Hecking County Engineer's Office

By *[Signature]* Date 7-1-96

PLAT PREPARED FROM SURVEY
MADE JUNE 26-96 BY

[Signature]
PROFESSIONAL SURVEYOR NO. 6044

EXHIBIT "A"

Being a part of the tract of land that is now or formerly in the name of Donald and Elizabeth Moore as recorded in Deed Book 192 at page 351, Hocking County Recorder's Office, said tract being situated in the southwest quarter of Section 16, T13N, R16W, Green Township, Hocking County, State of Ohio, and more particularly described as follows:

Beginning at a corner post taken to be on the southwest corner of Section 16, T13N, R16W;

Thence along the west line of Section 16, North 3 degrees 56 minutes 01 seconds East, passing through a 5/8"x30" iron pin with a plastic identification cap set at 1501.10 feet, going a total distance of 1531.10 feet to a point in the center of Township Road No. 362 from which a stone found on what is taken to be the northwest corner of Fractional Lot 6 bears North 3 degrees 56 minutes 01 second East a distance of 1210.55 feet;

Thence leaving the west line of said section and along the center of said road the following three courses:

- [1] South 87 degrees 47 minutes 18 seconds East a distance of 50.58 feet to a point,
- [2] South 85 degrees 25 minutes 38 seconds East a distance of 93.84 feet, and
- [3] South 84 degrees 53 minutes 57 seconds East a distance of 155.64 feet to a point;


Thence leaving the center of said road, South 3 degrees 56 minutes 01 seconds West, passing through a 5/8"x30" iron pin with a plastic identification cap set at 30.00 feet, going a total distance of 1523.95 feet to a 5/8"x30" iron pin with a plastic identification cap set on the south line of Section 16 from which a stone found on what is taken to be the southeast corner of the west half of the southwest quarter of Section 16 bears South 86 degrees 55 minutes 02 seconds East a distance of 1033.58 feet;

Thence along the south line of Section 16, North 86 degrees 55 minutes 02 seconds West a distance of 300.03 feet to the place of beginning, containing 10.528 acres, more or less, subject to the right of way of Township Road No. 362 and all easements of record.

All 5/8" X 30" iron pins with plastic identification caps set are stamped "Seymour & Associates".


The bearings used in the above described tract were based on monuments found on the west line of Section 16 as bearing North 3 degrees 56 minutes 01 second East and are for the determination of angles only.

The above described tract was surveyed by George F. Seymour, Ohio Professional Surveyor No. 6044, June 26, 1996.

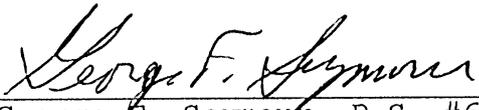
George F. Seymour, P.S. #6044



Approved - Mathematically
Hocking County Engineer's office
By:  Date 7-1-96

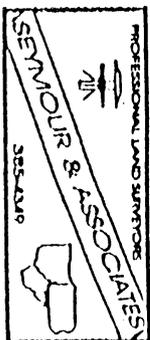

GREEN 17+16



PLAT OF A 5.0028 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0028 AC.

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

Approved - Mathematically
Hocking County Engineer's Office

LPG DATE 11-22-00

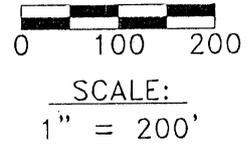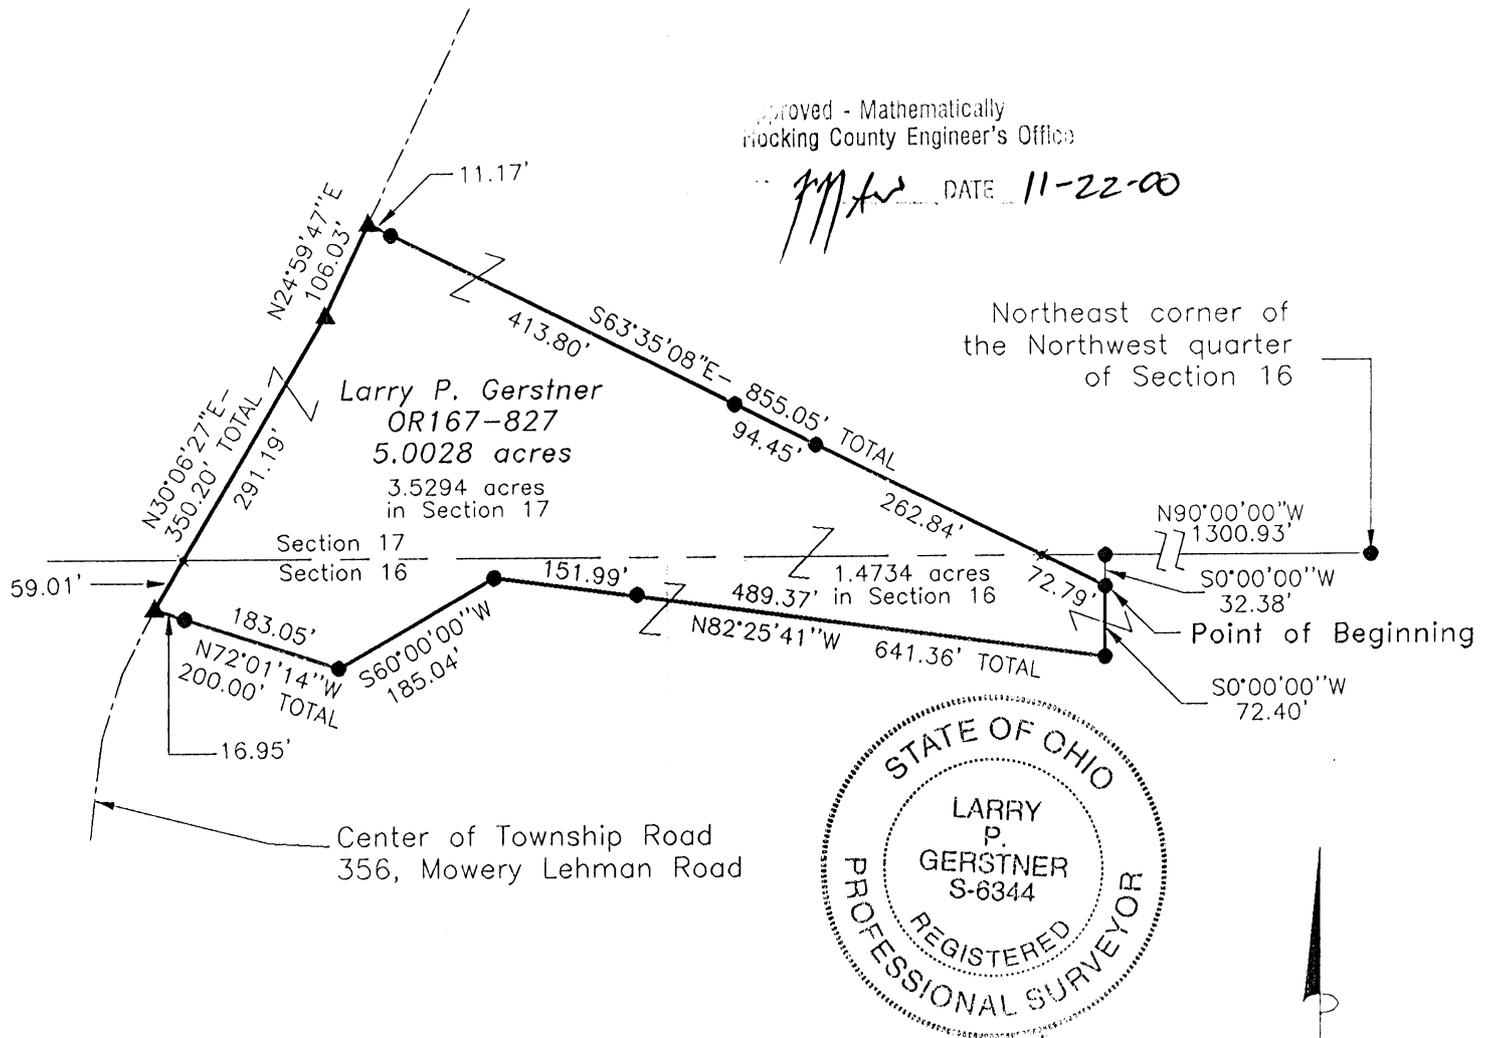

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- × Point

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0028 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence with the North line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 1300.93 feet to a 5/8" iron pin set; thence leaving the North line of Section 16 South 0 degrees 00 minutes 00 seconds West a distance of 32.38 feet to a 5/8" iron pin set, and being the point of **Beginning** of the tract of land to be described;

thence continuing South 0 degrees 00 minutes 00 seconds West a distance of 72.40 feet to a 5/8" iron pin set;

thence North 82 degrees 25 minutes 41 seconds West a distance of 641.36 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 489.37 feet;

thence South 60 degrees 00 minutes 00 seconds West a distance of 185.04 feet to a 5/8" iron pin set;

thence North 72 degrees 01 minute 14 seconds West a distance of 200.00 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing a 5/8" iron pin set at a distance of 183.05 feet;


thence with the center of said Township Road 356 the following two bearings and distances:

1) North 30 degrees 06 minutes 27 seconds East a distance of 350.20 feet to a MAG nail set and passing into Section 17 at a distance of 59.01 feet;

2) North 24 degrees 59 minutes 47 seconds East a distance of 106.03 feet to a MAG nail set;

thence leaving the center of said Township Road 356 South 63 degrees 35 minutes 08 seconds East a distance of 855.05 feet to the point of beginning, passing 5/8" iron pins set at distances of 11.17 feet, 424.97 feet, and 519.42 feet, passing back into Section 16 at a distance of 782.26 feet, containing 5.0028 acres more or less with 3.5294 acres more or less being in Section 17 and 1.4734 acres more or less being in Section 16, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 5.0028 acre survey is intended to describe part of the 168 acre Tract Four and part of the 82.5 acre Tract Six, as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on October 31, 2000.

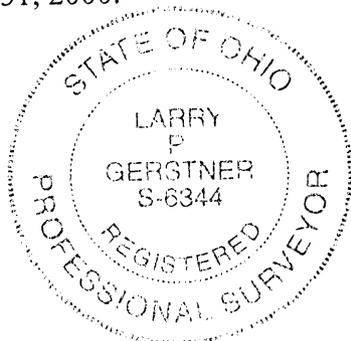

Reviewed - Mathematically
Hocking County Engineer's Office

J. P. ... DATE 11-22-00

Larry P. Gerstner

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 5.0026 ACRE TRACT FOR THE BOY SCOUT PROPERTY

GREEN 16
5.0026 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.




Center of Township Road
356, Mowery Lehman Road

Approved - Mathematically
Hocking County Engineer's Office

Northeast corner of
the Northwest quarter
of Section 16

LPG DATE 11-21-00

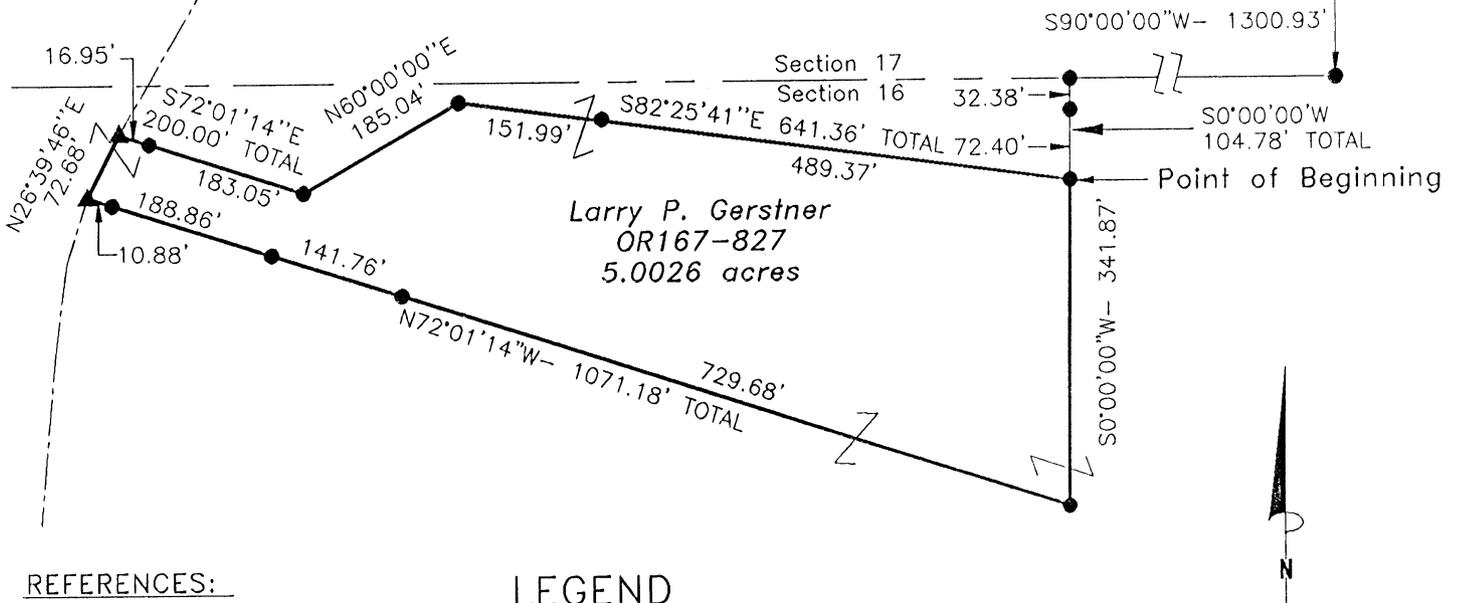


REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

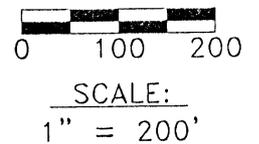

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0026 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence with the North line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 1300.93 feet to a 5/8" iron pin set; thence leaving the North line of Section 16 South 0 degrees 00 minutes 00 seconds West a distance of 104.78 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 32.38 feet, and being the point of **Beginning** of the tract of land to be described;

thence continuing South 0 degrees 00 minutes 00 seconds West a distance of 341.87 feet to a 5/8" iron pin set;

thence North 72 degrees 01 minute 14 seconds West a distance of 1071.18 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing 5/8" iron pins set at distances of 729.68 feet, 871.44 feet, and 1060.30 feet;

thence with the center of said Township Road 356 North 26 degrees 39 minutes 46 seconds East a distance of 72.68 feet to a MAG nail set;

thence leaving the center of said Township Road 356 South 72 degrees 01 minute 14 seconds East a distance of 200.00 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 16.95 feet;

thence North 60 degrees 00 minutes 00 seconds East a distance of 185.04 feet to a 5/8" iron pin set;

thence South 82 degrees 25 minutes 41 seconds East a distance of 641.36 feet to the point of beginning, passing a 5/8" iron pin set at a distance 151.99 feet, containing 5.0026 acres more or less, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 5.0026 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on October 31, 2000.

Hocking County Recorder's Office

7972 DATE 11-21-00

Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

Green 16
5.0002 Ac.

PLAT OF A 5.0002 ACRE TRACT FOR THE BOY SCOUT PROPERTY


Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



Approved - Mathematically
Hocking County Engineer's Office

BY *J. Gerstner* DATE 8-29-00

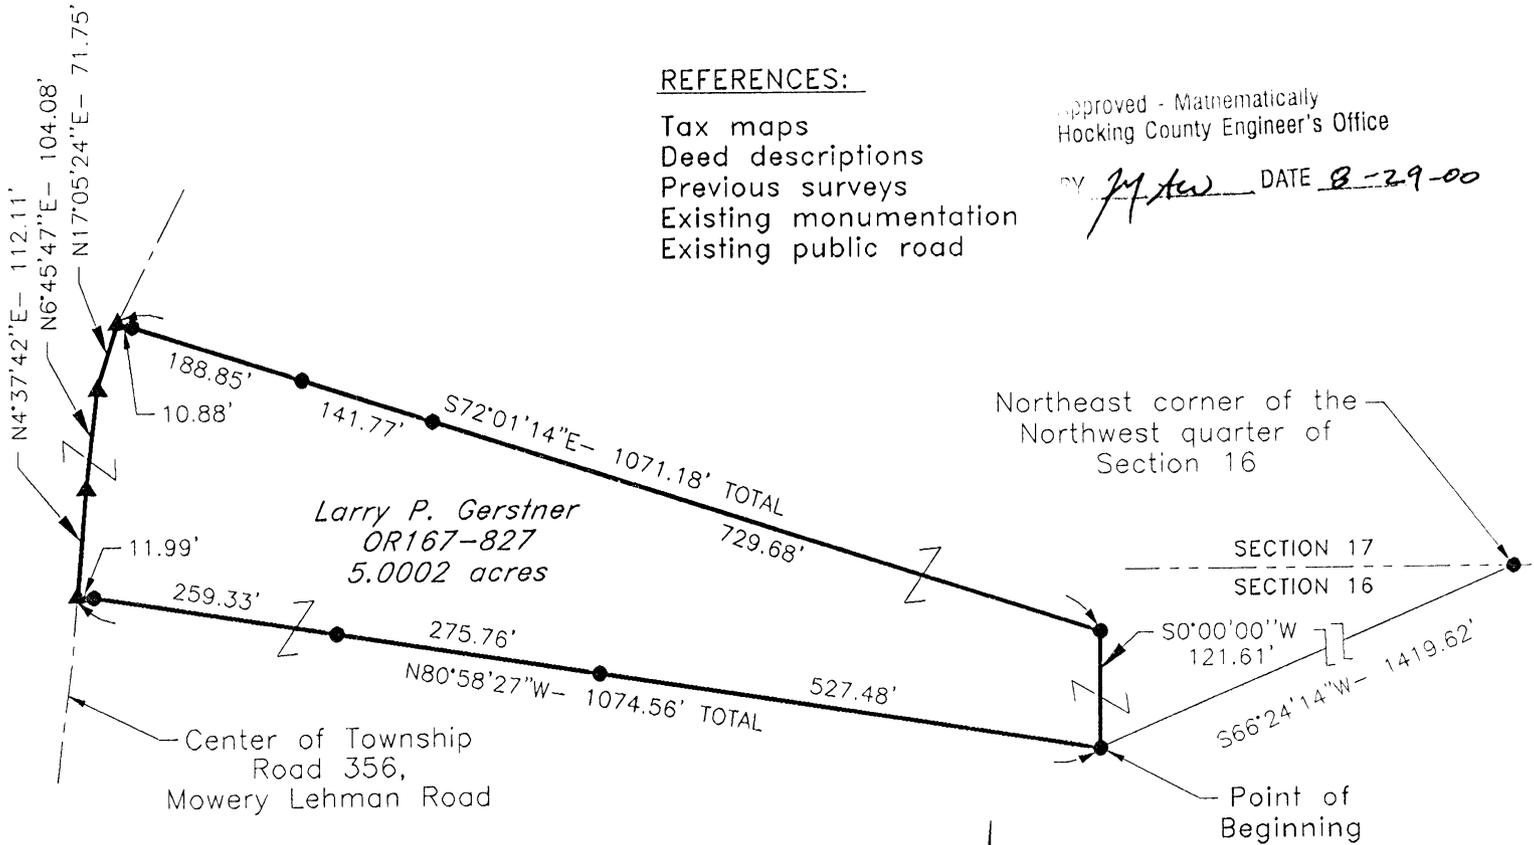

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

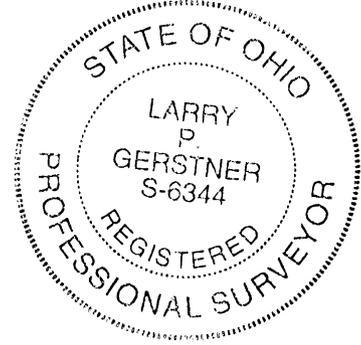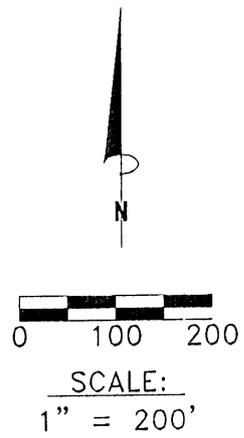

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 22nd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0002 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence leaving the North line of Section 16 South 66 degrees 24 minutes 14 seconds West a distance of 1419.62 feet to a 5/8" iron pin set; and being the point of **Beginning** of the tract of land to be described;

thence North 80 degrees 58 minutes 27 seconds West a distance of 1074.56 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing 5/8" iron pins set at distances of 527.48 feet, 803.24 feet, and 1062.57 feet;

thence with the center of said Township Road 356 the following three bearings and distances:

- 1) North 4 degrees 37 minutes 42 seconds East a distance of 112.11 feet to a MAG nail set;
- 2) North 6 degrees 45 minutes 47 seconds East a distance of 104.08 feet to a MAG nail set;
- 3) North 17 degrees 05 minutes 24 seconds East a distance of 71.75 feet to a MAG nail set;

thence leaving the center of said Township Road 356 South 72 degrees 01 minute 14 seconds East a distance of 1071.18 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 10.88 feet, 199.73 feet, and 341.50 feet;

thence South 0 degrees 00 minutes 00 seconds West a distance of 121.61 feet to the point of beginning, containing 5.0002 acres more or less, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 5.0002 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 22, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-22-00

Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16


PLAT OF A 5.0003 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0003 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.


LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

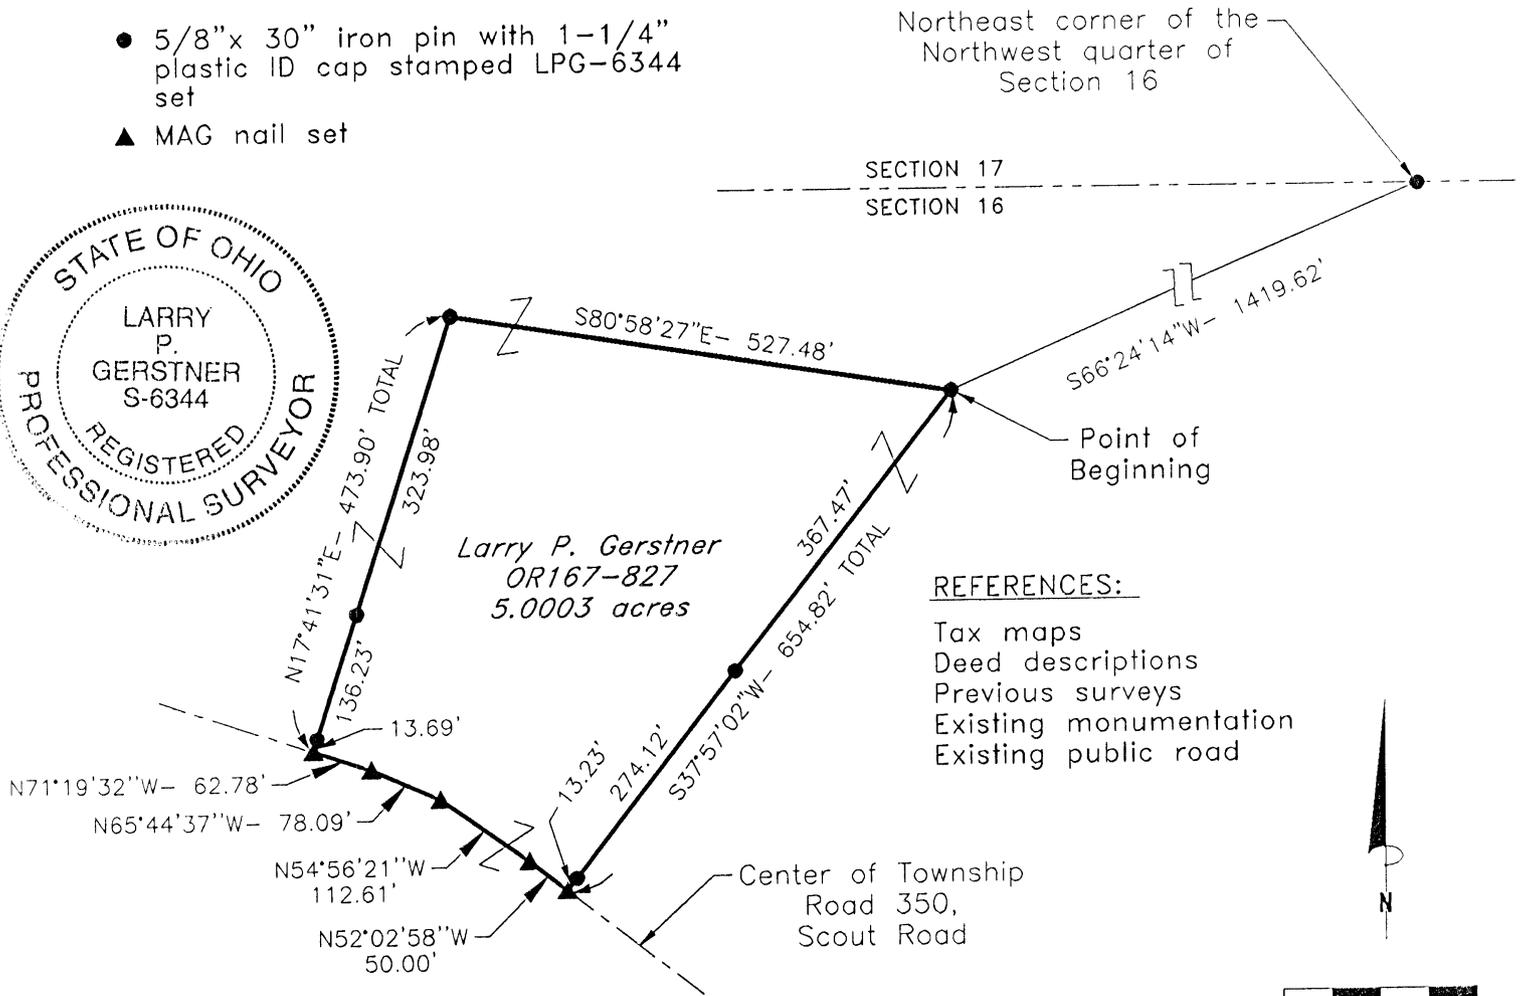

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



SCALE: 1" = 200'

Approved - Mathematically
Hocking County Engineer's Office

BY *LPG* DATE 8-29-00

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 22nd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0003 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence leaving the North line of Section 16 South 66 degrees 24 minutes 14 seconds West a distance of 1419.62 feet to a 5/8" iron pin set; and being the point of **Beginning** of the tract of land to be described;

thence South 37 degrees 57 minutes 02 seconds West a distance of 654.82 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 367.47 feet and 641.59 feet;

thence with the center of said Township Road 350 the following four bearings and distances:

- 1) North 52 degrees 02 minutes 58 seconds West a distance of 50.00 feet to a MAG nail set;
- 2) North 54 degrees 56 minutes 21 seconds West a distance of 112.61 feet to a MAG nail set;
- 3) North 65 degrees 44 minutes 37 seconds West a distance of 78.09 feet to a MAG nail set;
- 4) North 71 degrees 19 minutes 32 seconds West a distance of 62.78 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 17 degrees 41 minutes 31 seconds East a distance of 473.90 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 13.69 feet and 149.92 feet;

thence South 80 degrees 58 minutes 27 seconds East a distance of 527.48 feet to the point of beginning, containing 5.0003 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.0003 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 22, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-29-00

Larry P. Gerstner






Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 54.491 ACRE TRACT FOR THE BOY SCOUT PROPERTY **GREEN 16 & 17**

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

54.491 ac.

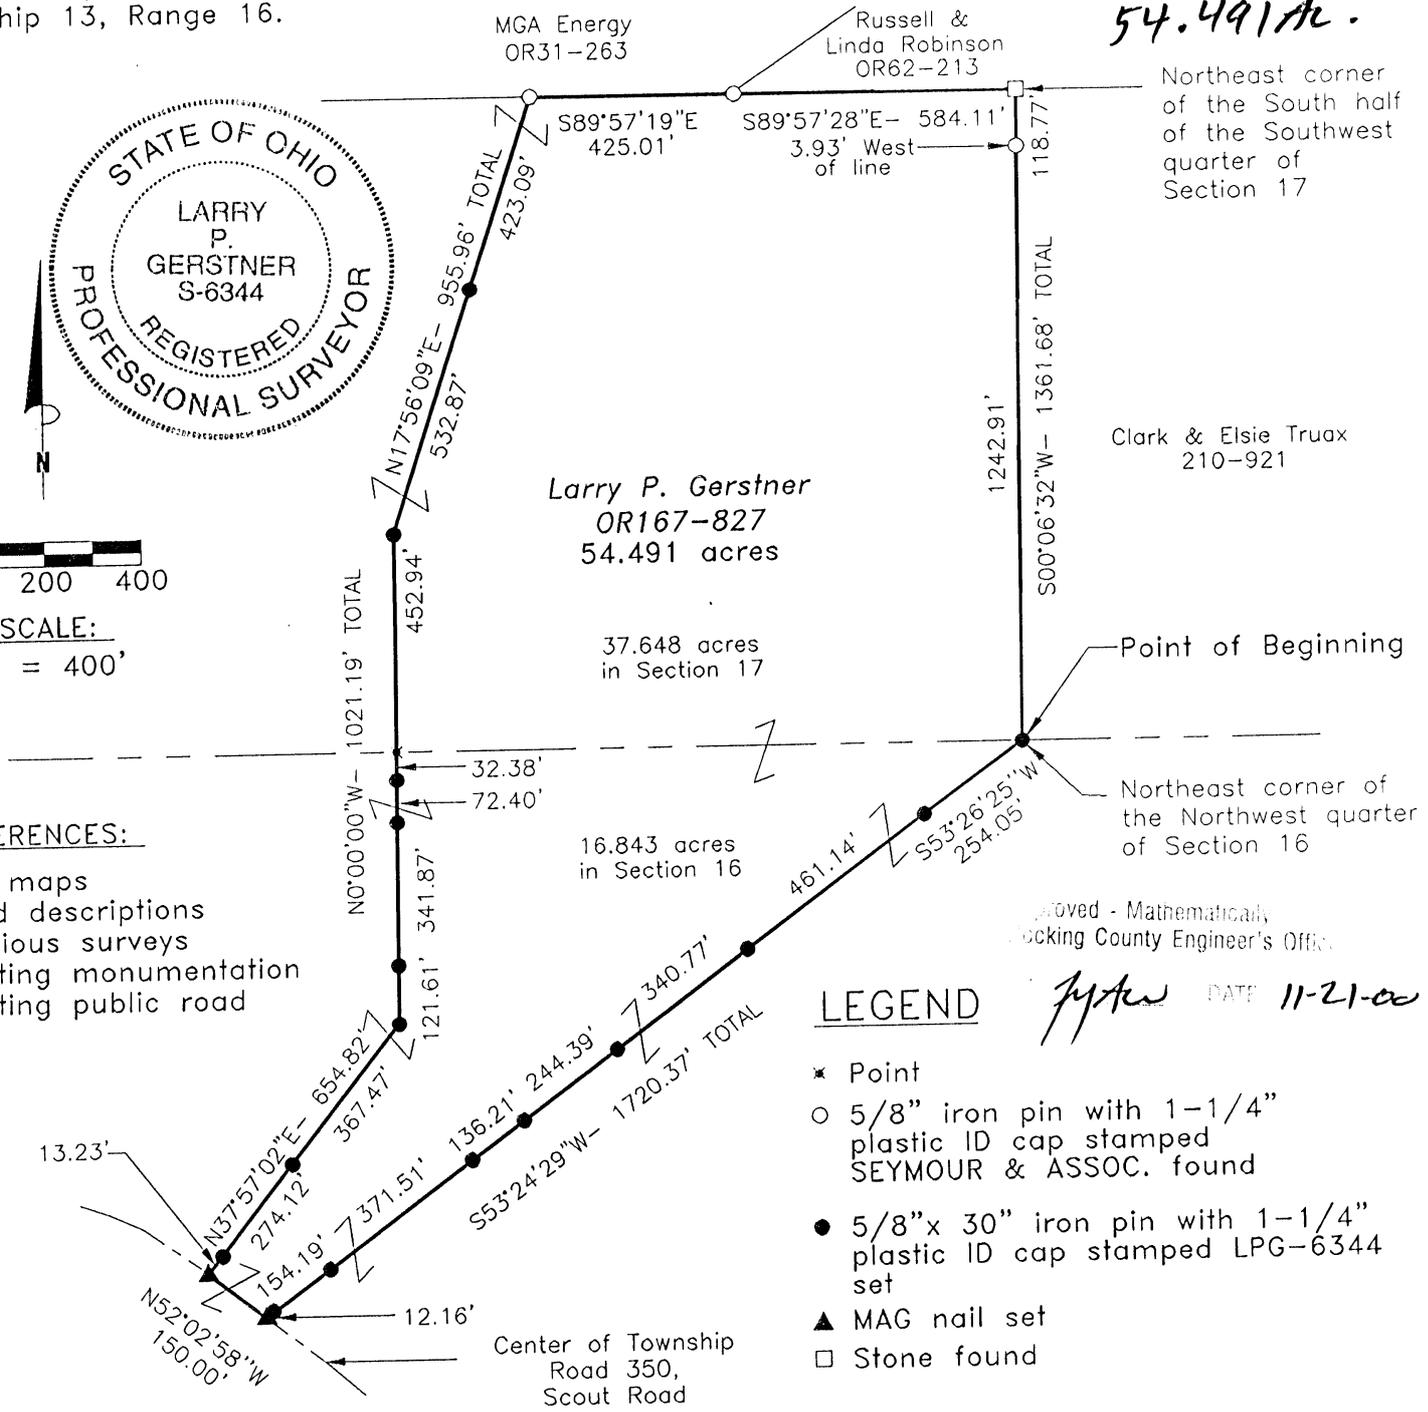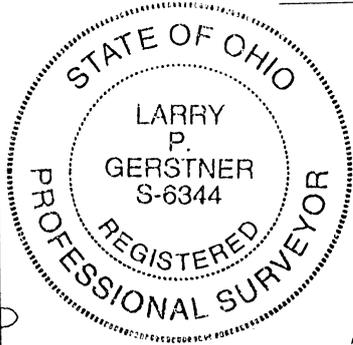

- REFERENCES:**
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road

LEGEND

- ✱ Point
- 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

Approved - Mathematically
Hocking County Engineer's Office.
[Signature] DATE 11-21-00

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature: Larry P. Gerstner]
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 54.491 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Beginning at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set;

thence South 53 degrees 24 minutes 29 seconds West a distance of 1720.37 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 461.14 feet, 801.91 feet, 1046.30 feet, 1182.51 feet, 1554.02 feet, and 1708.21 feet;

thence with the center of said Township Road 350 North 52 degrees 02 minutes 58 seconds West a distance of 150.00 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 37 degrees 57 minutes 02 seconds East a distance of 654.82 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 13.23 feet and 287.35 feet;

thence North 0 degrees 00 minutes 00 seconds East a distance of 1021.19 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 121.61 feet, 463.48 feet, and 535.88 feet, and passing into Section 17 at a distance of 568.26 feet;


thence North 17 degrees 56 minutes 09 seconds East a distance of 955.96 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found and passing a 5/8" iron pin set at a distance of 532.87 feet;

thence South 89 degrees 57 minutes 19 seconds East a distance of 425.01 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found;

thence South 89 degrees 57 minutes 28 seconds East a distance of 584.11 feet to a stone found at the Northeast corner of the South half of the Southwest quarter of Section 17;

thence South 0 degrees 06 minutes 32 seconds West a distance of 1361.68 feet to the point of beginning, passing a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found 3.93 feet West of the property line at a distance of 118.77 feet, containing 54.491 acres more or less with 16.843 acres more or less being in Section 16 and 37.648 acres more or less being in Section 16, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 54.491 acre survey is intended to describe part of the 168 acre Tract Four and part of the 82.5 acre Tract Six, as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on October 31, 2000.

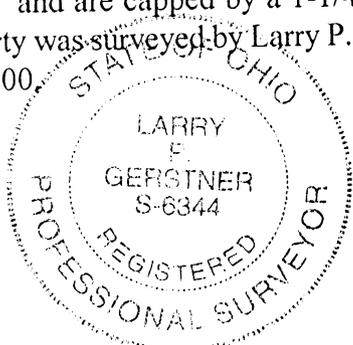

Approved - Mathematically
Hocking County Engineer's Office

Larry P. Gerstner
DATE 11-21-00


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.0033 AC.

PLAT OF A 5.0033 ACRE TRACT FOR EUGENE AND BARBARA SMITH

Situated in Green Township, Hocking County, Ohio; being part of North half of Section 16, Township 13, Range 16.

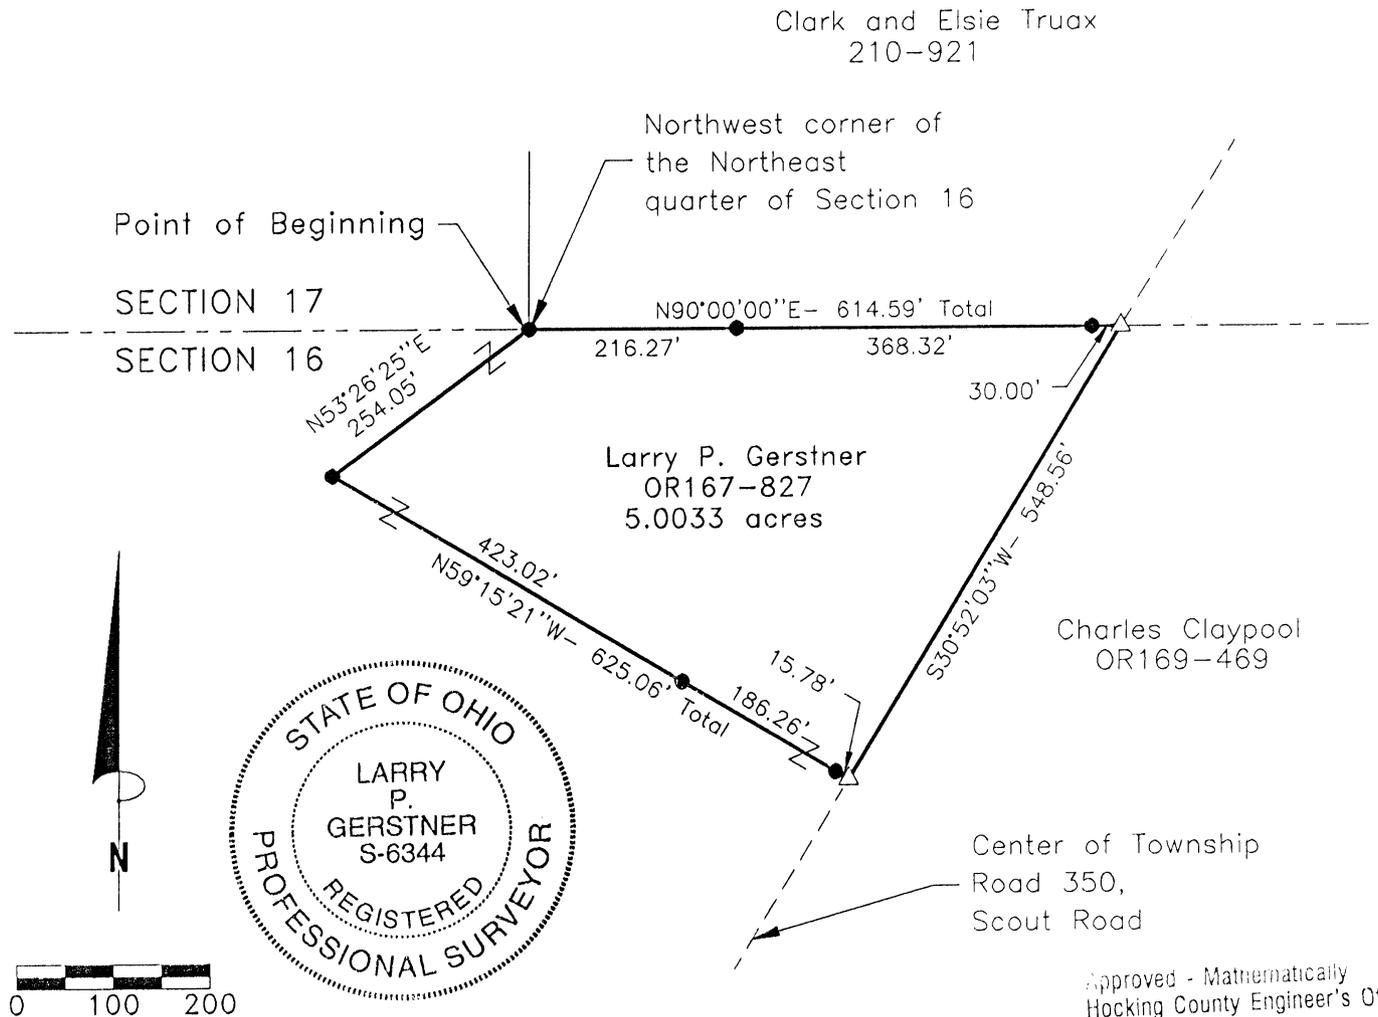

Approved - Mathematically
Hocking County Engineer's Office
BY *[Signature]* DATE 8-9-00

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set

REFERENCE BEARING:

North line Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 27th day of July, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0033 ACRE TRACT FOR EUGENE AND BARBARA SMITH

Situated in Green Township, Hocking County, Ohio; being part of the North half of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence with the North line of Section 16 North 90 degrees 00 minutes 00 seconds East a distance of 614.59 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 216.27 feet and 584.59 feet;

thence with the center of said Township Road 350 South 30 degrees 52 minutes 03 seconds West a distance of 548.56 feet to a MAG nail set;

thence leaving the surface of said Township Road 350 North 59 degrees 15 minutes 21 seconds West a distance of 625.06 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 15.78 feet and 202.04 feet;

thence North 53 degrees 26 minutes 25 seconds East a distance of 254.05 feet to the point of beginning, containing 5.0033 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.0033 acre survey is intended to describe part of the 168 acre Tract Four and part of the 84 acre Tract Five both as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on July 27, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY JyA DATE 8-1-00

Larry P. Gerstner



Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 7.319 ACRE TRACT FOR THE BOY SCOUT PROPERTY

7.319 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the North half of Section 16, Township 13, Range 16.

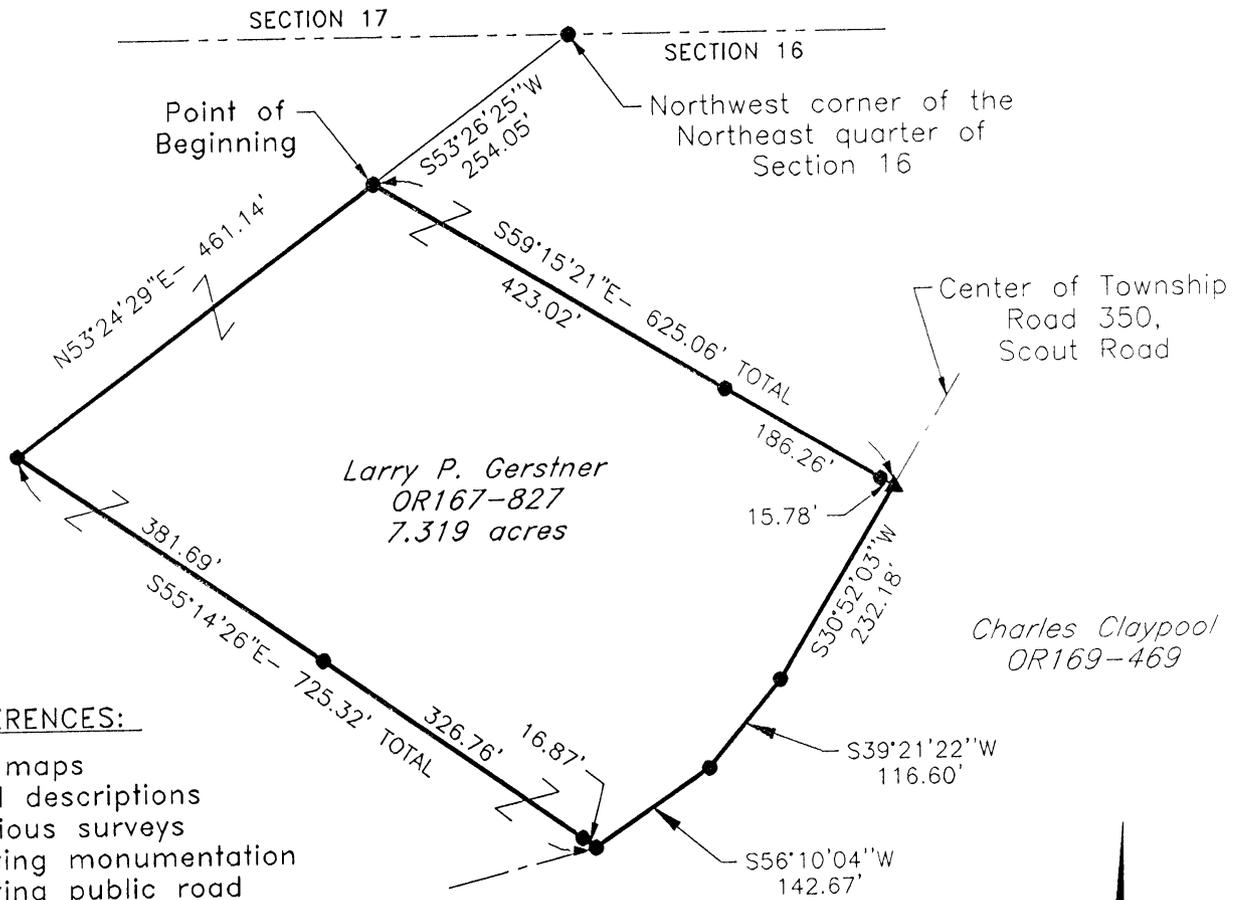


REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8"x 30" (15" in roadway) iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

Digitally
Hocking County Engineer's Office

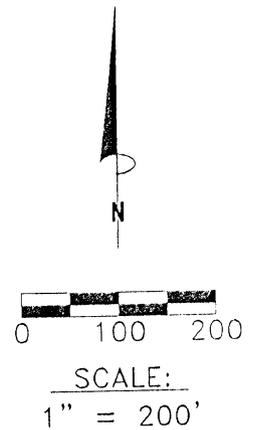

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 21st day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

LPG DATE 8-25-00

SURVEY DESCRIPTION OF A 7.319 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the North half of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set; and being the point of **Beginning** of the tract of land to be described;

thence South 59 degrees 15 minutes 21 seconds East a distance of 625.06 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 423.02 feet and 609.28 feet;

thence with the center of said Township Road 350 the following three bearings and distances:

- 1) South 30 degrees 52 minutes 03 seconds West a distance of 232.18 feet to a 5/8" iron pin set;
- 2) South 39 degrees 21 minutes 22 seconds West a distance of 116.60 feet to a 5/8" iron pin set;
- 3) South 56 degrees 10 minutes 04 seconds West a distance of 142.67 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 350 North 55 degrees 14 minutes 26 seconds West a distance of 725.32 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 16.87 feet and 343.63 feet;

thence North 53 degrees 24 minutes 29 seconds East a distance of 461.14 feet to the point of beginning, containing 7.319 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 7.319 acre survey is intended to describe part of the 168 acre Tract Four and part of the 84 acre Tract Five both as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 21, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY [Signature] DATE 8-25-00

[Signature]

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16


PLAT OF A 5.0034 ACRE TRACT FOR RONALD AND HEATHER ANDERSON

5.0034 ac.

Situated in Green Township, Hocking County, Ohio; being part of the North half of Section 16, Township 13, Range 16.


REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

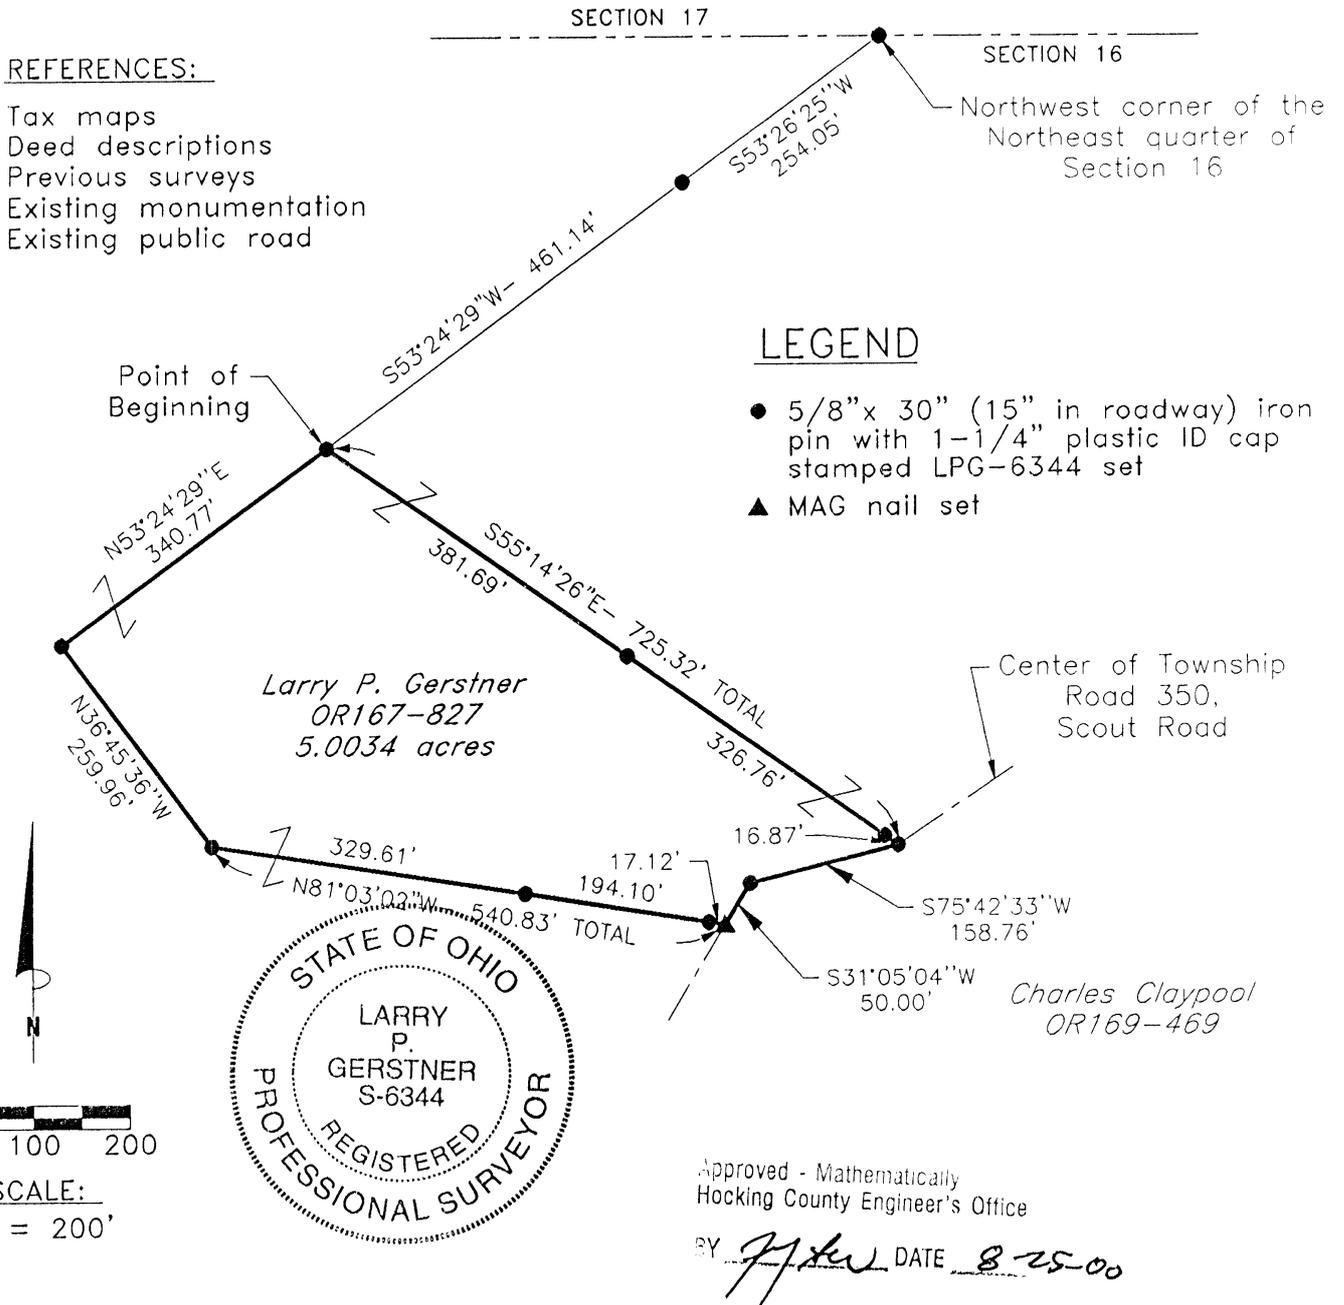

LEGEND

- 5/8" x 30" (15" in roadway) iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set



Approved - Mathematically
Hocking County Engineer's Office

BY J.P.G. DATE 8-25-00

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 21st day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0034 ACRE TRACT FOR RONALD AND HEATHER ANDERSON

Situated in Green Township, Hocking County, Ohio; being part of the North half of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set; thence South 53 degrees 24 minutes 29 seconds West a distance of 461.14 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence South 55 degrees 14 minutes 26 seconds East a distance of 725.32 feet to a 5/8" iron pin set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 381.69 feet and 708.45 feet;

thence with the center of said Township Road 350 the following two bearings and distances:

1) South 75 degrees 42 minutes 33 seconds West a distance of 158.76 feet to a 5/8" iron pin set;

2) South 31 degrees 05 minutes 04 seconds West a distance of 50.00 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 81 degrees 03 minutes 02 seconds West a distance of 540.83 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 17.12 feet and 211.22 feet;

thence North 36 degrees 45 minutes 36 seconds West a distance of 259.96 feet to a 5/8" iron pin set;

thence North 53 degrees 24 minutes 29 seconds East a distance of 340.77 feet to the point of beginning, containing 5.0034 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.0034 acre survey is intended to describe part of the 168 acre Tract Four and part of the 84 acre Tract Five both as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 21, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY

DATE

8-25-00

A handwritten signature in black ink, appearing to read "Larry P. Gerstner", written over a horizontal line.

Survey by:



Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0035 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0035 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

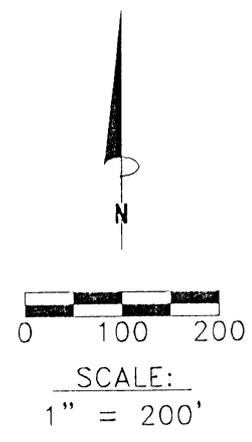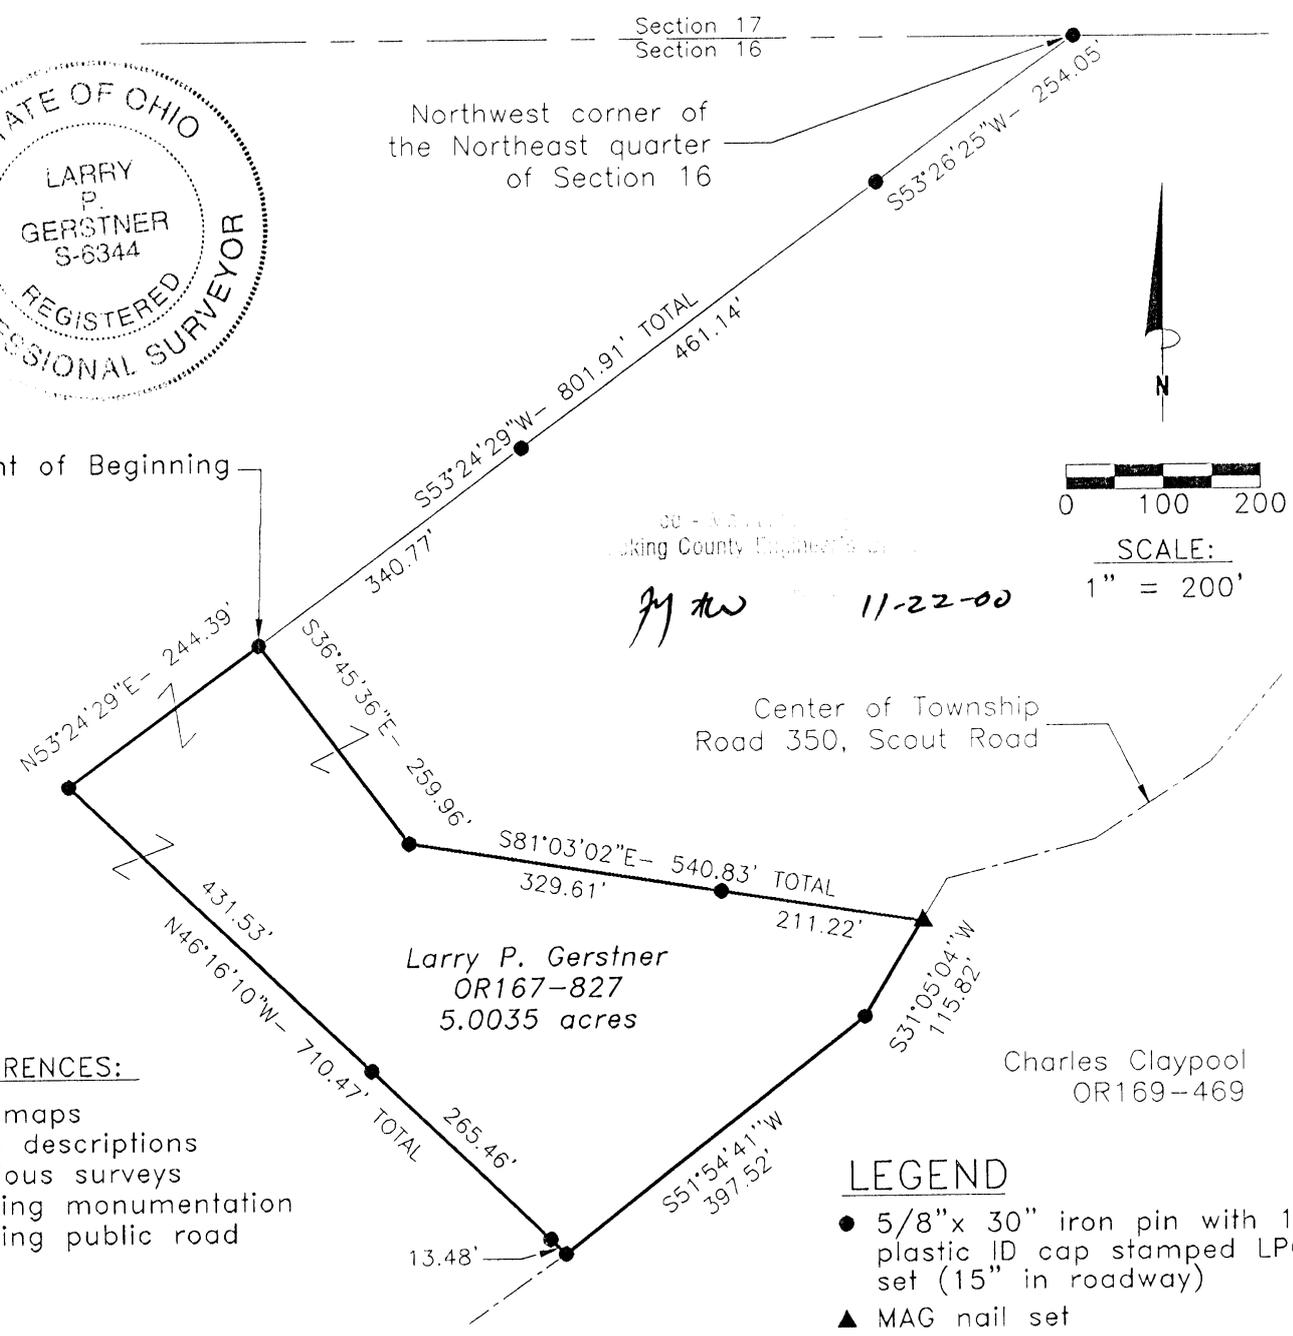

11-22-00

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set (15" in roadway)
- ▲ MAG nail set

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0035 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set; thence South 53 degrees 24 minutes 29 seconds West a distance of 801.91 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 461.14 feet, and being the point of **Beginning** of the tract of land to be described;

thence South 36 degrees 45 minutes 36 seconds East a distance of 259.96 feet to a 5/8" iron pin set;

thence South 81 degrees 03 minutes 02 seconds East a distance of 540.83 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing a 5/8" iron pin set at a distance of 329.61 feet;

thence with the center of said Township Road 350 the following two bearings and distances:

1) South 31 degrees 05 minutes 04 seconds West a distance of 115.82 feet to a 5/8" iron pin set;

2) South 51 degrees 54 minutes 41 seconds West a distance of 397.52 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 350 North 46 degrees 16 minutes 10 seconds West a distance of 710.47 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 13.48 feet and 278.94 feet;

thence North 53 degrees 24 minutes 29 seconds East a distance of 244.39 feet to the point of beginning, containing 5.0035 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.0035 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 31, 2000.



Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 11-22-00

[Signature]

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5-0036 AC

PLAT OF A 5.0036 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public roads

Northwest corner of the Northeast quarter of Section 16

Section 17
Section 16

S55°26'25"W - 254.05'
461.14'

LARRY P. GERSTNER
REGISTERED SURVEYOR


LPG

11-22-00


Point of Beginning

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set (15" in roadway)
- ▲ MAG nail set

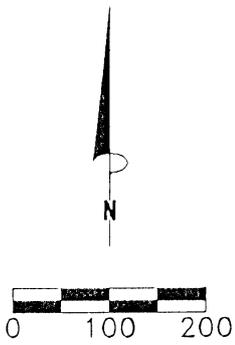

SCALE:
1" = 200'

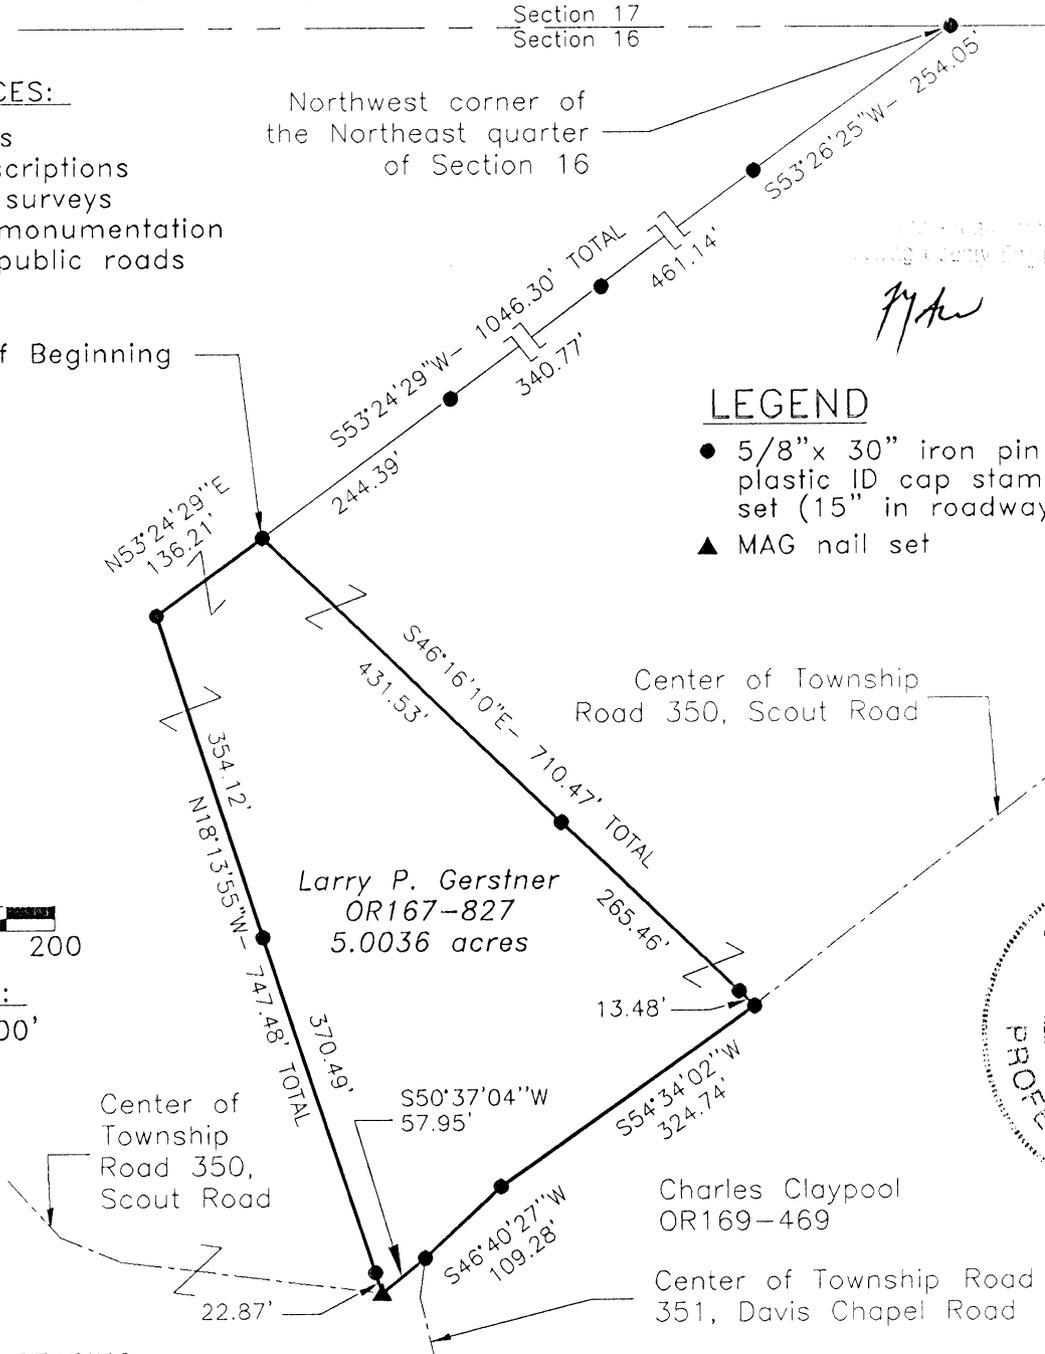

Larry P. Gerstner
OR167-827
5.0036 acres



Charles Claypool
OR169-469

Center of Township Road 351, Davis Chapel Road

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0036 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set; thence South 53 degrees 24 minutes 29 seconds West a distance of 1046.30 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 461.14 feet and 801.91 feet, and being the point of **Beginning** of the tract of land to be described;

thence South 46 degrees 16 minutes 10 seconds East a distance of 710.47 feet to a 5/8" iron pin set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 431.53 feet and 696.99 feet;

thence with the center of said Township Road 350 the following three bearings and distances:

1) South 54 degrees 34 minutes 02 seconds West a distance of 324.74 feet to a 5/8" iron pin set;
2) South 46 degrees 40 minutes 27 seconds West a distance of 109.28 feet to a 5/8" iron pin set at the intersection of Township Road 351, Davis Chapel Road;

3) South 50 degrees 37 minutes 04 seconds West a distance of 57.95 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 18 degrees 13 minutes 55 seconds West a distance of 747.48 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 22.87 feet and 393.36 feet;

thence North 53 degrees 24 minutes 29 seconds East a distance of 136.21 feet to the point of beginning, containing 5.0036 acres more or less, and subject to the public easement of said Township Roads 350 and 351 and any other public or private easements of record.

The above 5.0036 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and existing public roads. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 31, 2000.



Approved - Mathematically
Hocking County Engineer's Office

LPG DATE 11-22-00

Larry P. Gerstner

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.327 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.327 AC.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

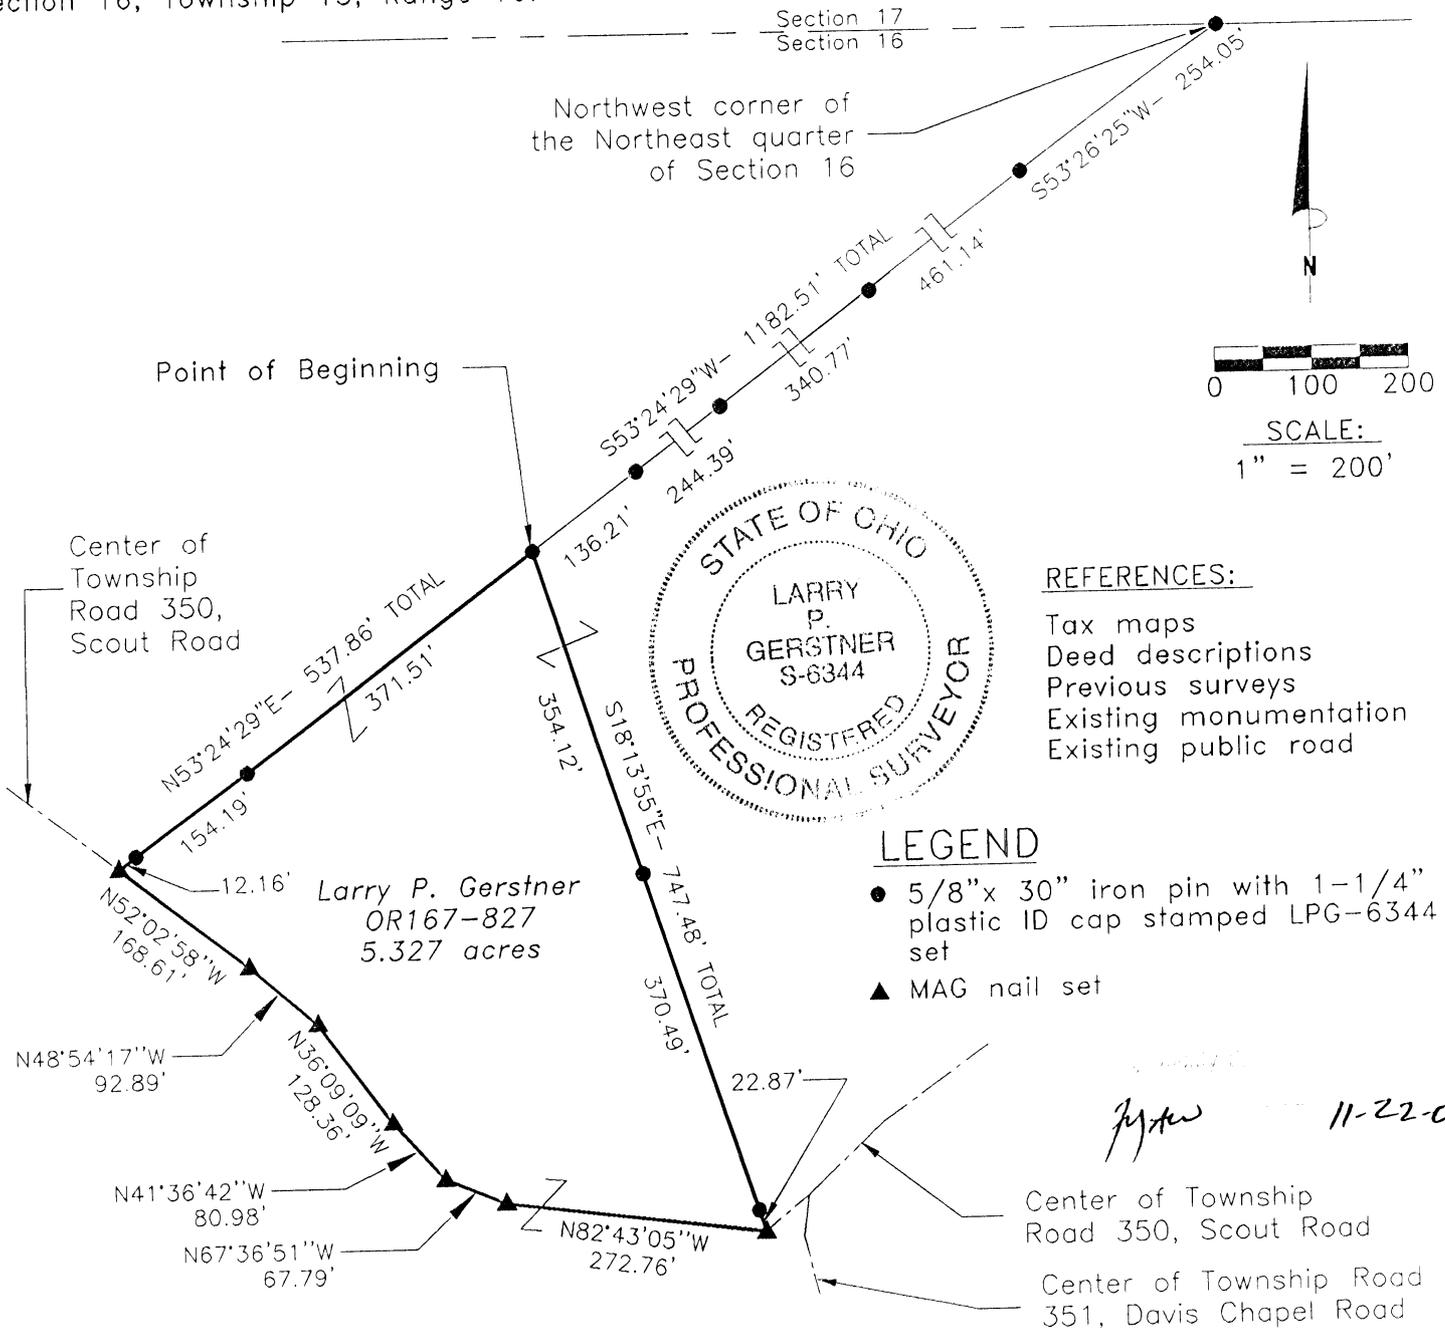

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.327 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northwest corner of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set; thence South 53 degrees 24 minutes 29 seconds West a distance of 1182.51 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 461.14 feet, 801.91 feet, and 1046.30 feet, and being the point of **Beginning** of the tract of land to be described;

thence South 18 degrees 13 minutes 55 seconds East a distance of 747.48 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 354.12 feet and 724.60 feet;

thence with the center of said Township Road 350 the following six bearings and distances:

1) North 82 degrees 43 minutes 05 seconds West a distance of 272.76 feet to a MAG nail set;

2) North 67 degrees 36 minutes 51 seconds West a distance of 67.79 feet to a MAG nail set;

3) North 41 degrees 36 minutes 42 seconds West a distance of 80.98 feet to a MAG nail set;

4) North 36 degrees 09 minutes 09 seconds West a distance of 128.36 feet to a MAG nail set;

5) North 48 degrees 54 minutes 17 seconds West a distance of 92.89 feet to a MAG nail set;

6) North 52 degrees 02 minutes 58 seconds West a distance of 168.61 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 53 degrees 24 minutes 29 seconds East a distance of 537.86 feet to the point of beginning, passing 5/8" iron pins set at distances of 12.16 feet and 166.35 feet, containing 5.327 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.327 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

M.A.W. DATE *11-22-00*

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 10.006 ACRE TRACT FOR JOHN AND LEISA BARTHOLOMEW

10.006 Ac.

Situated in Green Township, Hocking County, Ohio; being all of Fractional Lot 5 and part of the East half of the Southwest quarter both of Section 16, Township 13, Range 16.

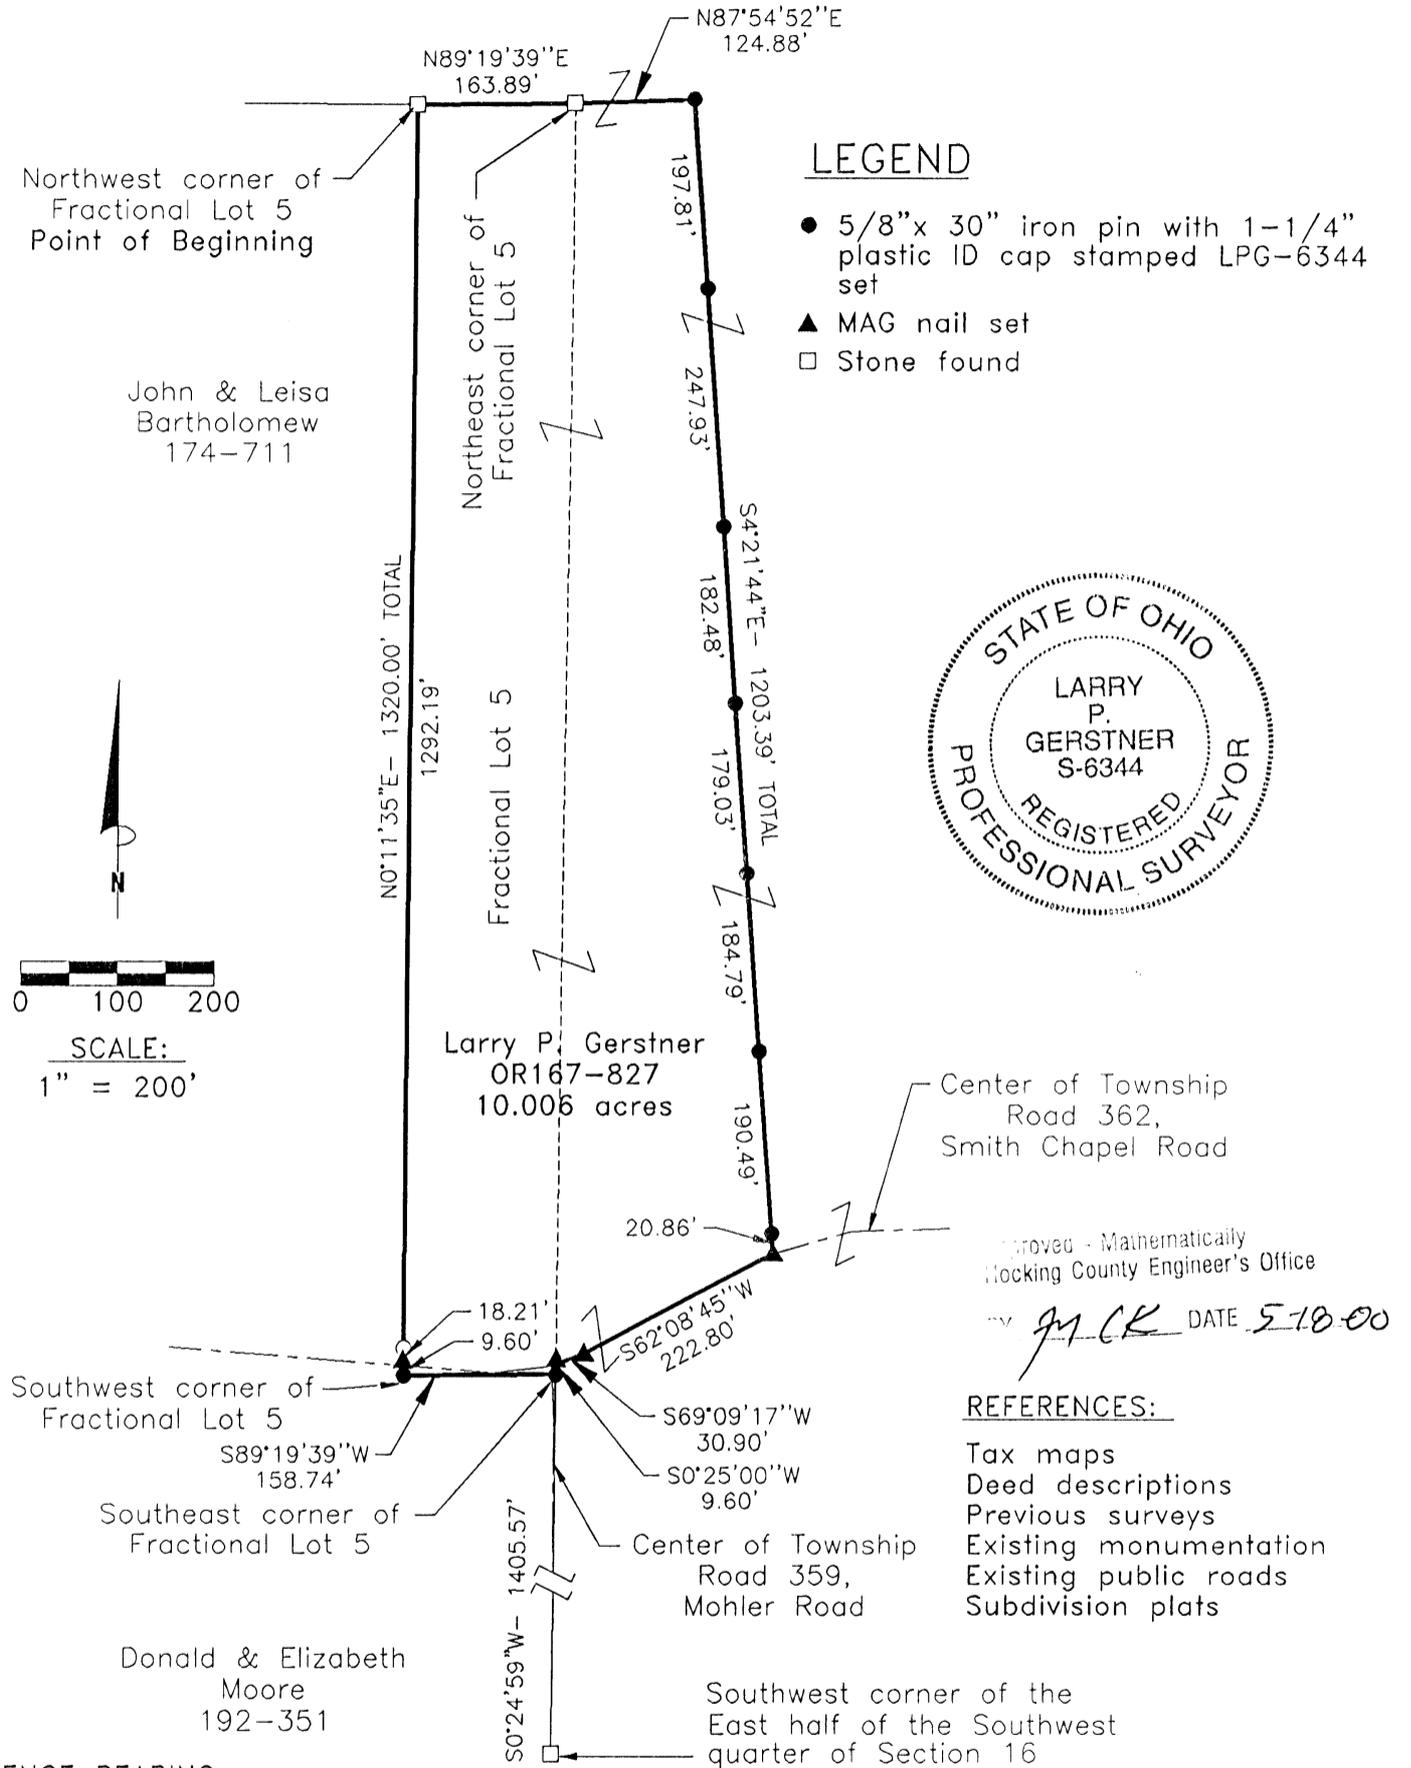

REFERENCE BEARING:

The West line of the East half of the Southwest quarter of Section 16 as South 0 degrees 25 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 4th day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 10.006 ACRE TRACT FOR JOHN AND LEISA BARTHOLOMEW

Situated in Green Township, Hocking County, Ohio; being all of Fractional Lot 5 and part of the East half of the Southwest quarter both of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northwest corner of said Fractional Lot 5; thence with the North line of said Fractional Lot 5 North 89 degrees 19 minutes 39 seconds East a distance of 163.89 feet to a stone found at the Northeast corner of said Fractional Lot 5;

thence leaving said Fractional Lot 5 North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set;

thence South 4 degrees 21 minutes 44 seconds East a distance of 1203.39 feet to a MAG nail set in the center of Township Road 362, Smith Chapel Road, and passing 5/8" iron pins set at distances of 197.81 feet, 445.74 feet, 628.22 feet, 807.25 feet, 992.04 feet, and 1182.53 feet;

thence with the center of said Township Road 362 the following two bearings and distances:

1) South 62 degrees 08 minutes 45 seconds West a distance of 222.80 feet to a MAG nail set;

2) South 69 degrees 09 minutes 17 seconds West a distance of 30.90 feet to a MAG nail set;

thence leaving the center of said Township Road 362 and with the surface of Township Road 359, Mohler Road South 0 degrees 25 minutes 00 seconds West a distance of 9.60 feet to a 5/8" iron pin set at the Southeast corner of said Fractional Lot 5, from which a stone found at the Southwest corner of the East half of the Southwest quarter of Section 16 bears South 0 degrees 24 minutes 59 seconds West at a distance of 1405.57 feet;

thence leaving the surface of said Township Road 359 and with the South line of said Fractional Lot 5 South 89 degrees 19 minutes 39 seconds West a distance of 158.74 feet to a 5/8" iron pin set at the Southwest corner of said Fractional Lot 5;

thence with the West line of said Fractional Lot 5 North 0 degrees 11 minutes 35 seconds East a distance of 1320.00 feet to the point of beginning, passing a MAG nail set in the center of said Township Road 362 at a distance of 9.60 feet and a 5/8" iron pin found at a distance of 27.81 feet, containing 10.006 acres more or less, and subject to the public easement of said Township Roads 362 and 359 and any other public or private easements of record.

The above 10.006 acre survey is intended to describe all of the 5 acre Tract One and part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of the East half of the Southwest quarter of Section 16 as South 0 degrees 25 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 4, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY LAG DATE 5-18-00

A handwritten signature in cursive script that reads "Larry P. Gerstner". The signature is written over a horizontal line.

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260


PLAT OF A 5.0024 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0024 ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

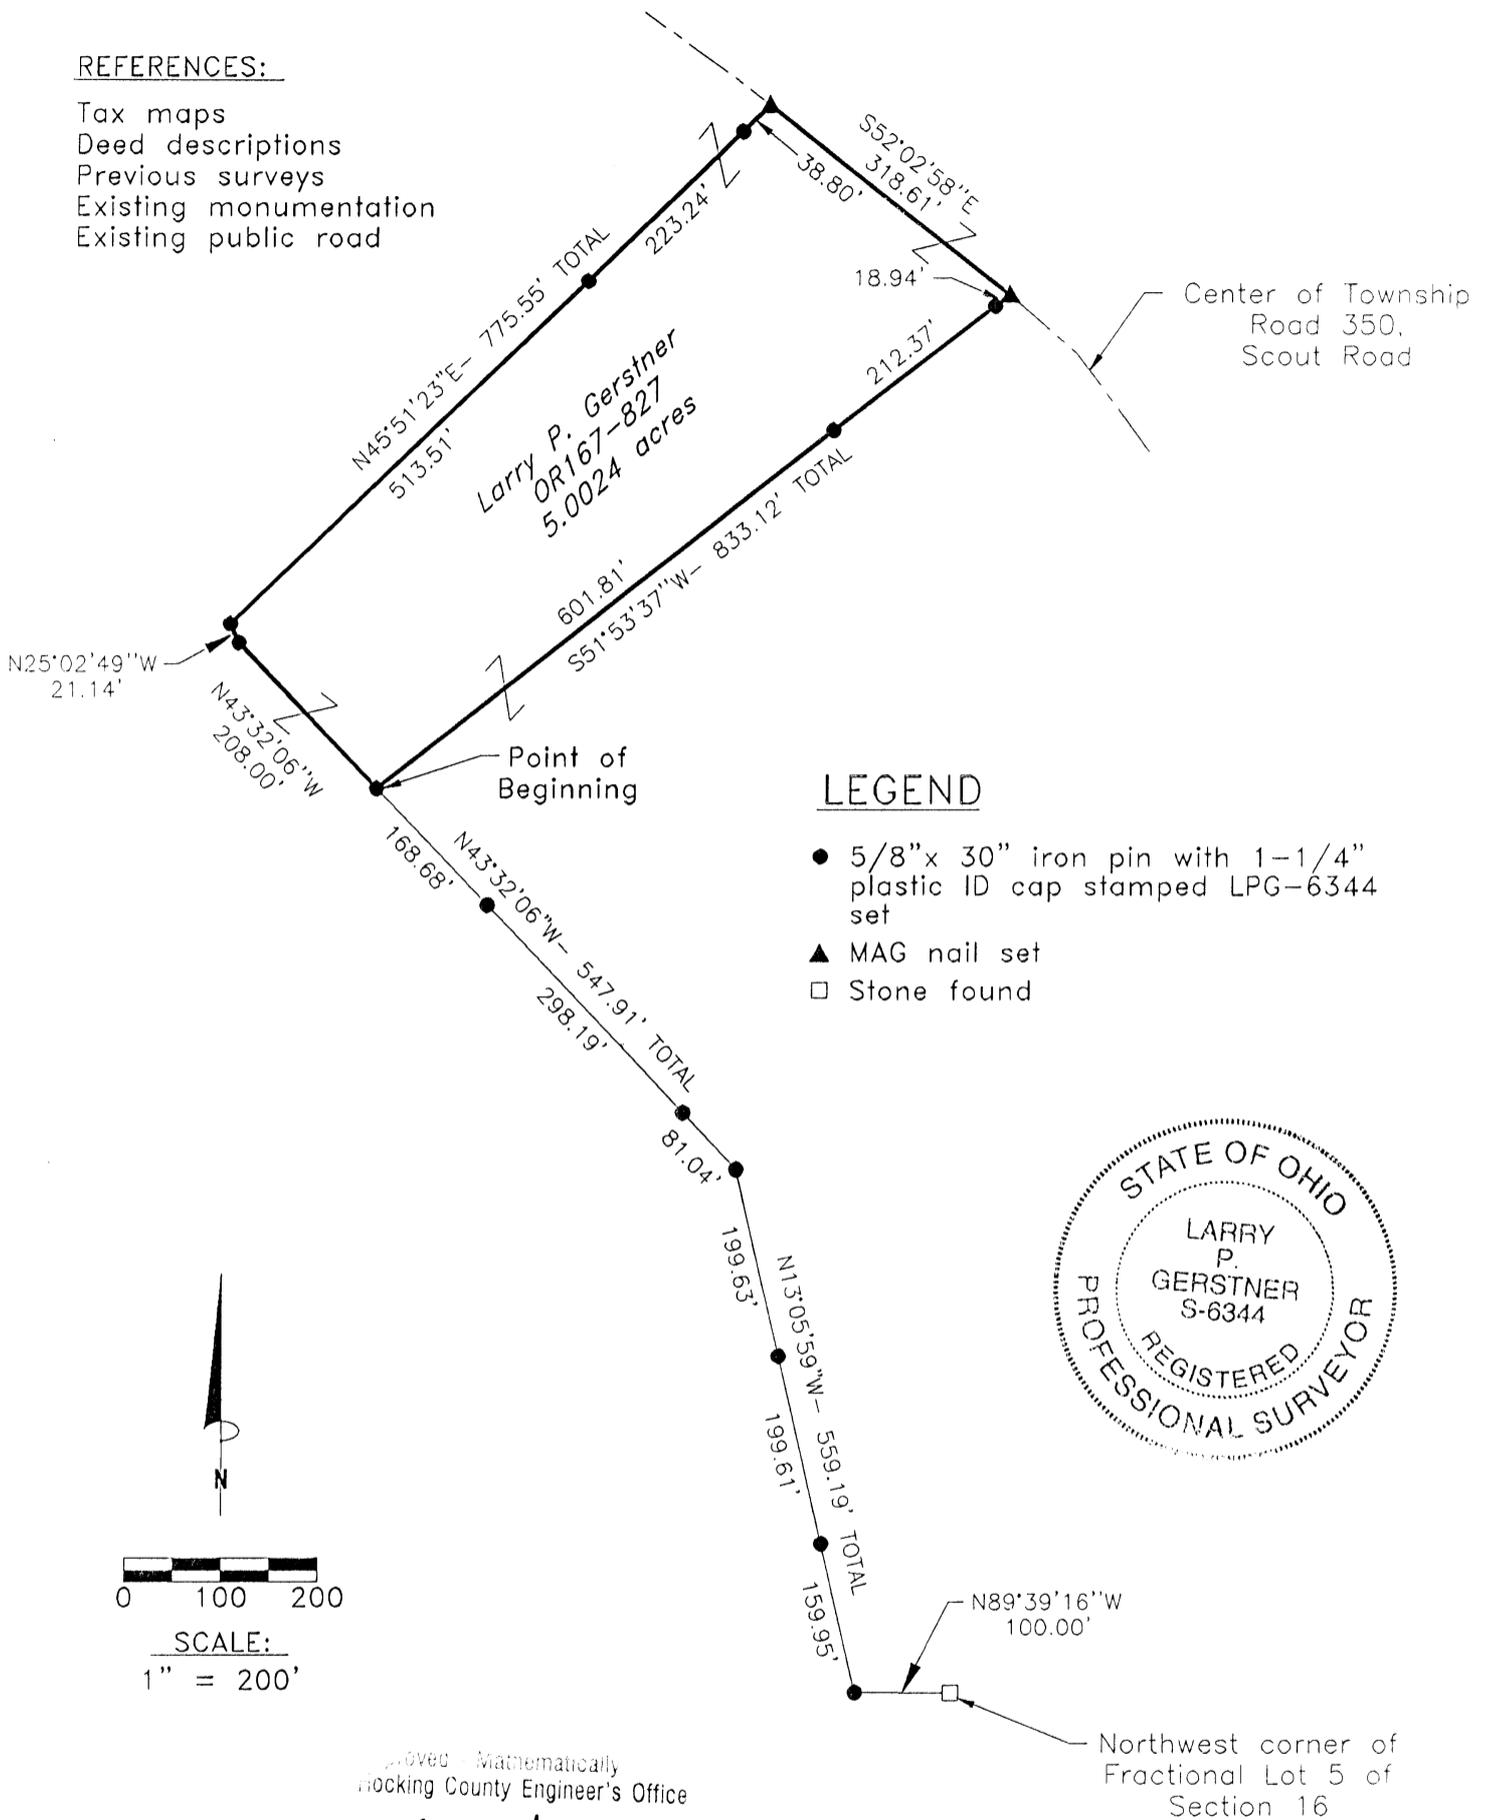

REFERENCE BEARING:

The South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0024 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 559.19 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 159.95 feet and 359.56 feet; thence North 43 degrees 32 minutes 06 seconds West a distance of 547.91 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 81.04 feet and 379.23 feet, and being the point of **Beginning** of the tract of land to be described;

thence continuing North 43 degrees 32 minutes 06 seconds West a distance of 208.00 feet to a 5/8" iron pin set;

thence North 25 degrees 02 minutes 49 seconds West a distance of 21.14 feet to a 5/8" iron pin set;

thence North 45 degrees 51 minutes 23 seconds East a distance of 775.55 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 513.51 feet, and 736.75 feet;

thence with the center of said Township Road 350 South 52 degrees 02 minutes 58 seconds East a distance of 318.61 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 51 degrees 53 minutes 37 seconds West a distance of 833.12 feet to the point of beginning, passing 5/8" iron pins set at distances of 18.94 feet and 231.31 feet, containing 5.0024 acres more or less, and subject to the public easement of said Township Roads 350 and any other public or private easements of record.

The above 5.0024 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY [Signature] DATE 9-8-00

[Signature: Larry P. Gerstner]

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260


GREEN 16
2.091Ac.

PLAT OF A 2.091 ACRE TRACT FOR THE BLUHM FAMILY TRUST

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southeast quarter of Section 16, Township 13, Range 16.

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

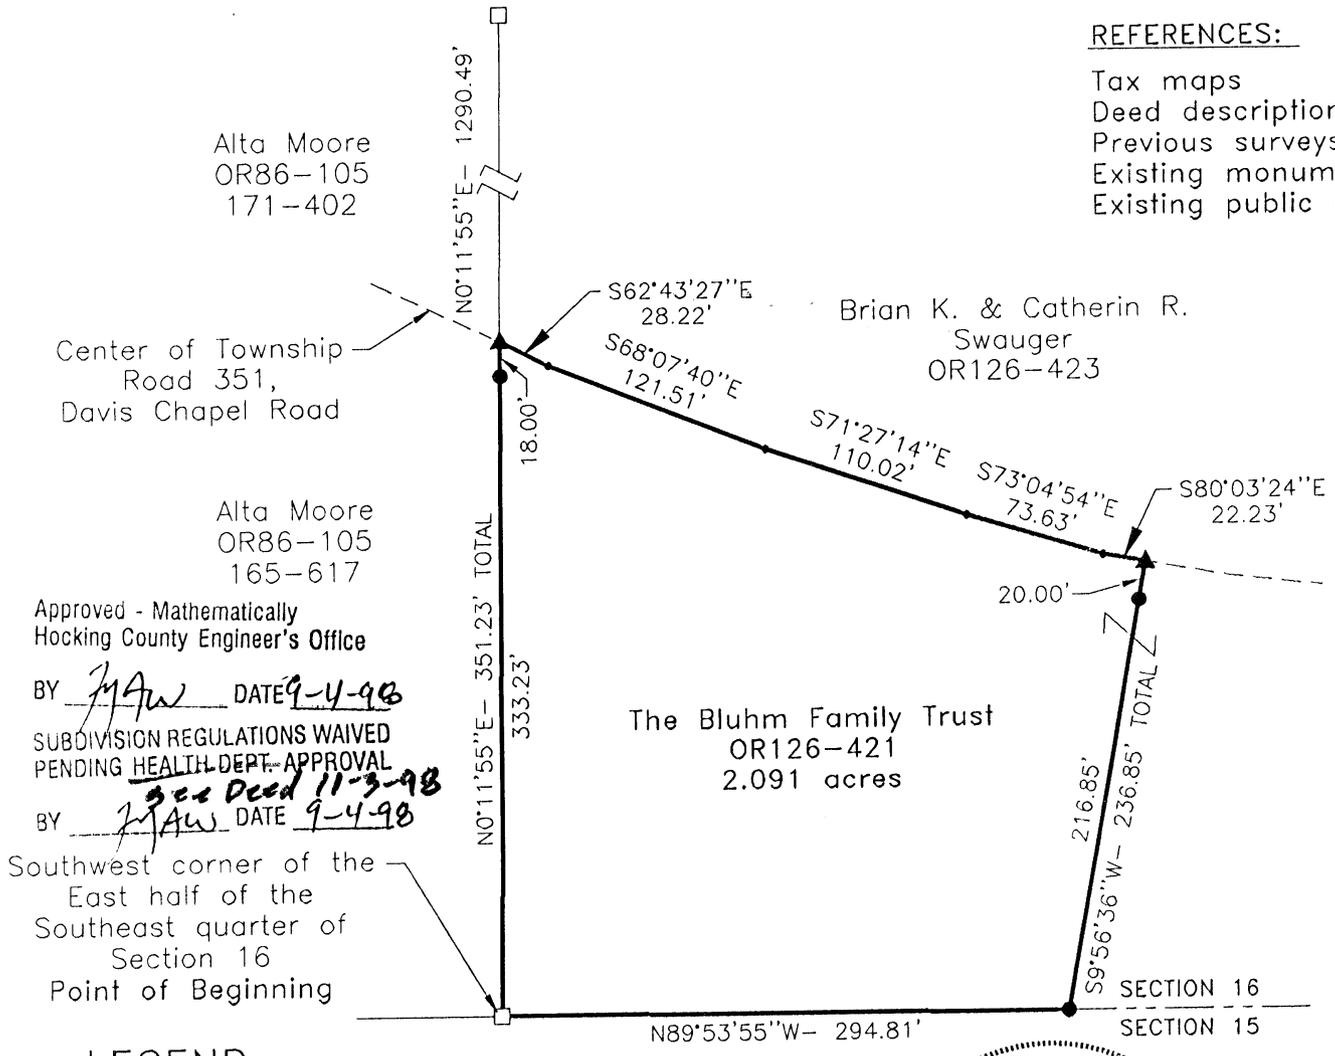

Approved - Mathematically
Hocking County Engineer's Office

BY JAW DATE 9-4-98

SUBDIVISION REGULATIONS WAIVED
PENDING HEALTH DEPT. APPROVAL

BY JAW DATE 9-4-98

Southwest corner of the
East half of the
Southeast quarter of
Section 16
Point of Beginning

LEGEND


- Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ PK nail set
- Stone found

REFERENCE BEARING:

The West line of the East half of the Southeast quarter of Section 16 as North 0 degrees 11 minutes 55 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 2nd day of Septemeber, 1998 and that the plat is a correct representation of the premises as described by said survey.

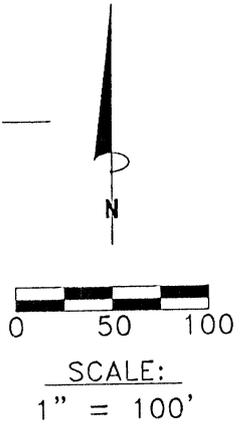

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

Larry P. Gerstner
Registered Surveyor No. 6344

SURVEY DESCRIPTION OF A 2.091 ACRE TRACT FOR THE BLUHM FAMILY TRUST

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southeast quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Southwest corner of the East half of the Southeast quarter of Section 16; thence leaving the South line of Section 16 North 0 degrees 11 minutes 55 seconds East a distance of 351.23 feet to a PK nail set in the center of Township Road 351, Davis Chapel Road, passing a 5/8" iron pin set at a distance of 333.23 feet, and from which a stone found bears North 0 degrees 11 minutes 55 seconds East at a distance of 1290.49 feet;

thence with the center of said Township Road 351 the following five bearings and distances:

- 1) South 62 degrees 43 minutes 27 seconds East a distance of 28.22 feet to a point;
- 2) South 68 degrees 07 minutes 40 seconds East a distance of 121.51 feet to a point;
- 3) South 71 degrees 27 minutes 14 seconds East a distance of 110.02 feet to a point;
- 4) South 73 degrees 04 minutes 54 seconds East a distance of 73.63 feet to a point;
- 5) South 80 degrees 03 minutes 24 seconds East a distance of 22.23 feet to a PK nail set;

thence leaving the center of said Township Road 351 South 9 degrees 56 minutes 36 seconds West a distance of 236.85 feet to a 5/8" iron pin set on the South line of Section 16 and passing a 5/8" iron pin set at a distance of 20.00 feet;

thence with the South line of Section 16 North 89 degrees 53 minutes 55 seconds West a distance of 294.81 feet to the point of beginning, containing 2.091 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 2.091 acre survey is intended to describe part of the 4.1812 acre surveyed tract as deeded to the Bluhm Family Trust, deed reference Volume OR126, Page 421, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of the East half of the Southeast quarter of Section 16 as North 0 degrees 11 minutes 55 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on September 2, 1998.

Approved - Mathematically
Hocking County Engineer's Office

BY J.P.G. DATE 9-4-98



SUBDIVISION REGULATIONS WAIVED
PENDING HEALTH DEPT. APPROVAL
BY J.P.G. DATE 1-4-98
35 DEED 11-3-98

Larry P. Gerstner



Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0021 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0021Ac.

Situated in Green Township, Hocking County, Ohio; being part of Northwest quarter of Section 16, Township 13, Range 16.

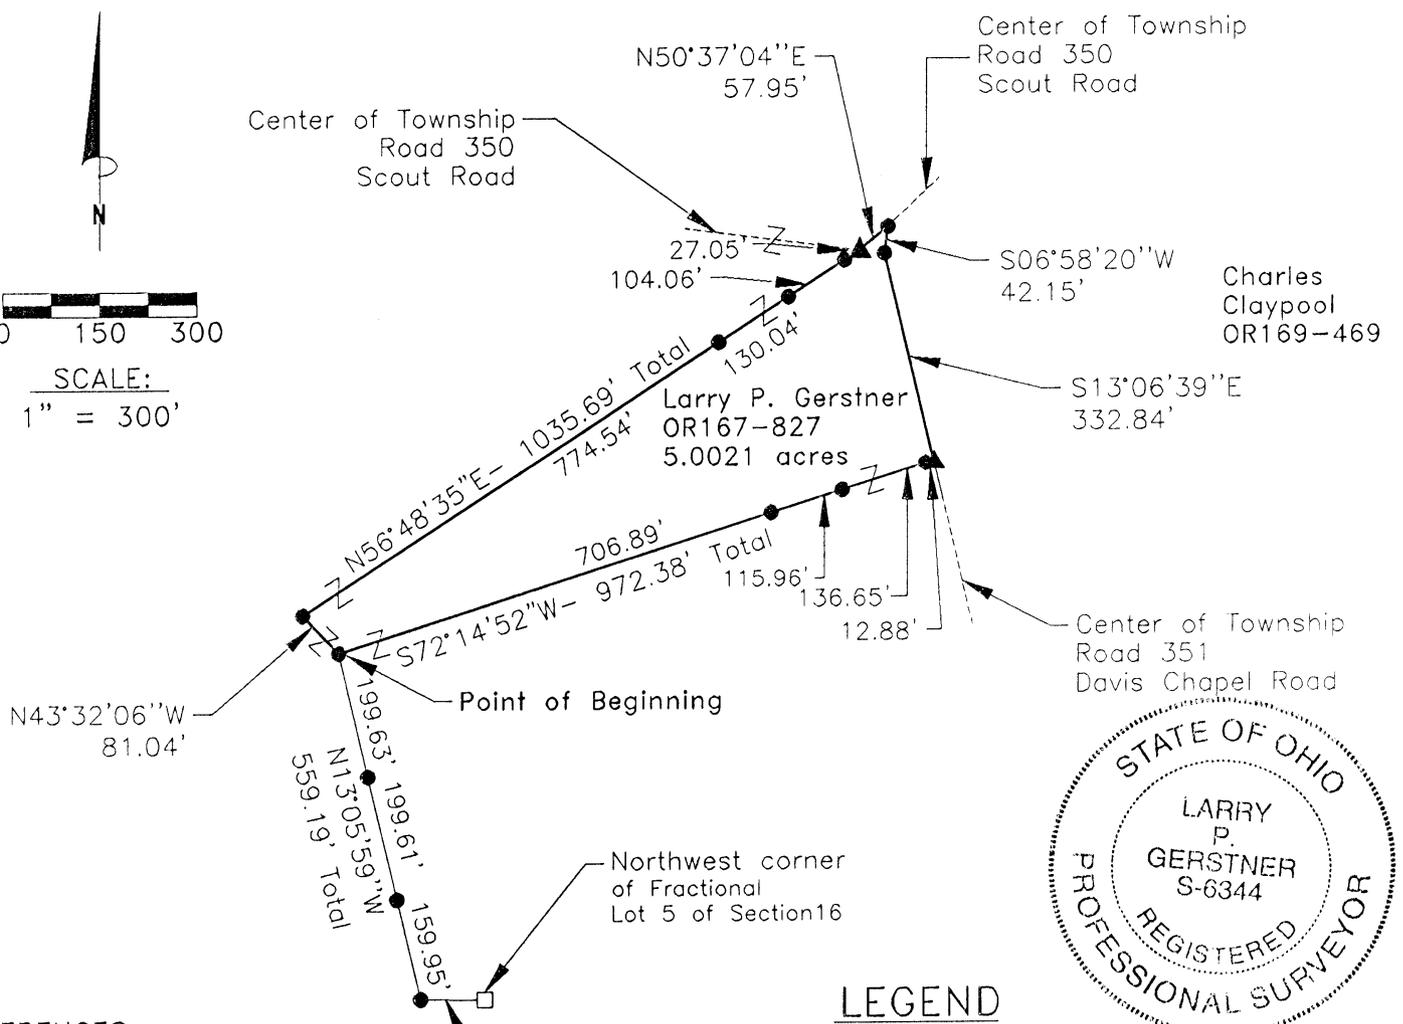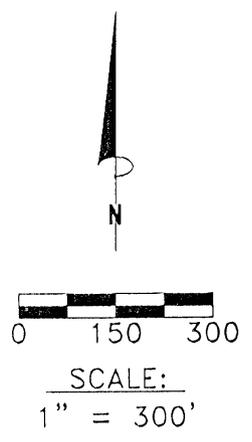

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
Hocking County Engineer's Office

BY *LPG* DATE 8-25-00

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0021 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 559.19 feet to a 5/8" iron pin set, passing a 5/8" iron pins set at distances of 159.95 feet and 359.56 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 43 degrees 32 minutes 06 seconds West a distance of 81.04 feet to a 5/8" iron pin set;

thence North 56 degrees 48 minutes 35 seconds East a distance of 1035.69 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 774.54 feet, 904.58 feet, and 1008.64 feet;

thence with the center of said Township Road 350 North 50 degrees 37 minutes 04 seconds East a distance of 57.95 feet to a 5/8" iron pin set at the intersection of Township Road 351, Davis Chapel Road;

thence leaving the center of said Township Road 350 and with the center of said Township Road 351 the following two bearings and distances:

1) South 6 degrees 58 minutes 20 seconds West a distance of 42.15 feet to a 5/8" iron pin set;

2) South 13 degrees 06 minutes 39 seconds East a distance of 332.84 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 72 degrees 14 minutes 52 seconds West a distance of 972.38 feet to the point of beginning, passing 5/8" iron pins set at distances of 12.88 feet, 149.53 feet, and 265.49 feet, containing 5.0021 acres more or less, and subject to the public easements of said Township Roads 350 and 351 and any other public or private easements of record.

The above 5.0021 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY MAW DATE 8-25-00

Larry P. Gerstner


Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 5.0020 ACRE TRACT FOR THE BOY SCOUT PROPERTY 5.0020 AC.

Situated in Green Township, Hocking County, Ohio; being part of Northwest quarter of Section 16, Township 13, Range 16.

LEGEND

- 5/8" x 30" (15" in roadway) iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

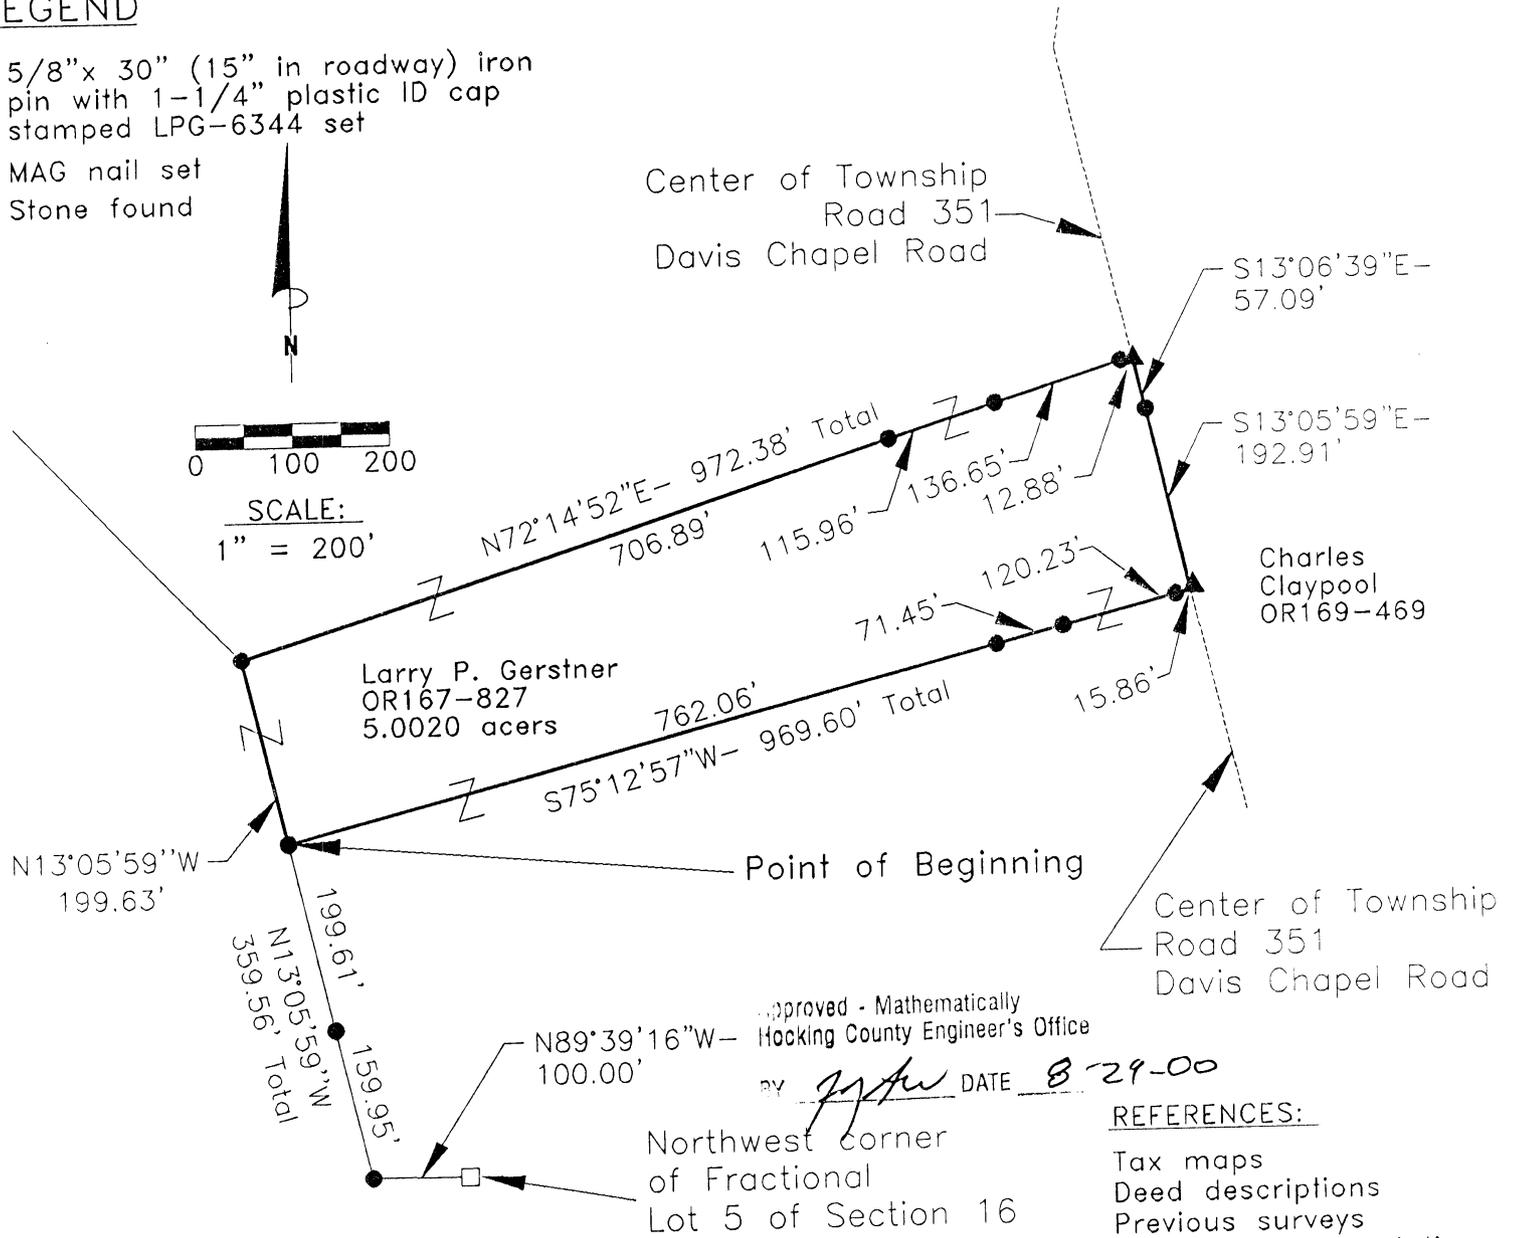

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0020 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 359.56 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 159.95 feet, and being the point of **Beginning** of the tract of land to be described;

thence continuing North 13 degrees 05 minutes 59 seconds West a distance of 199.63 feet to a 5/8" iron pin set;

thence North 72 degrees 14 minutes 52 seconds East a distance of 972.38 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 706.89 feet, 822.85 feet, and 959.50 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

- 1) South 13 degrees 06 minutes 39 seconds East a distance of 57.09 feet to a 5/8" iron pin set;
- 2) South 13 degrees 05 minutes 59 seconds East a distance of 192.91 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 75 degrees 12 minutes 57 seconds West a distance of 969.60 feet to the point of beginning, passing 5/8" iron pins set at distances of 15.86 feet, 136.09 feet, and 207.54 feet, containing 5.0020 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0020 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including August 3, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-29-00 Larry P. Gerstner





Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5-0019A

PLAT OF A 5.0019 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of Northwest quarter of Section 16, Township 13, Range 16.

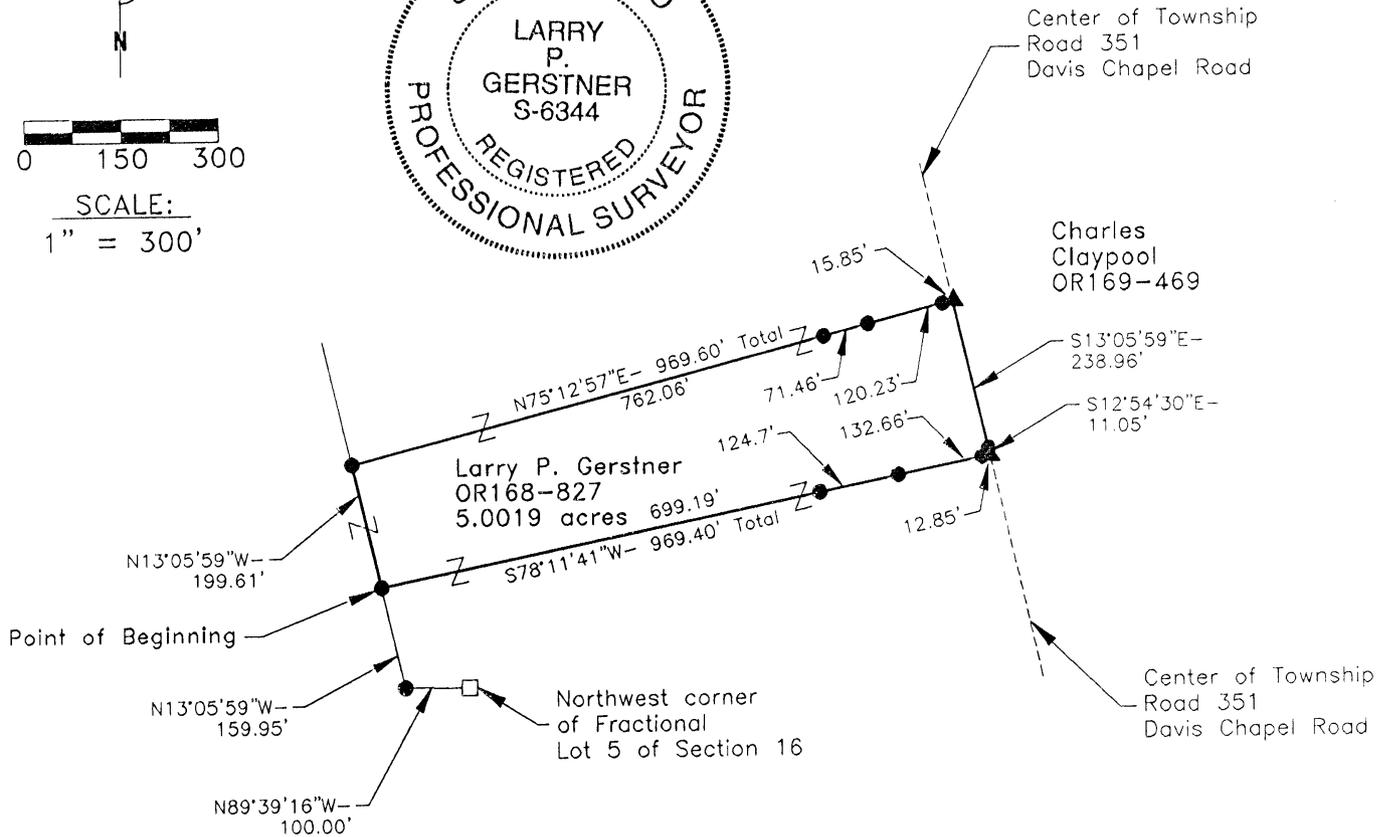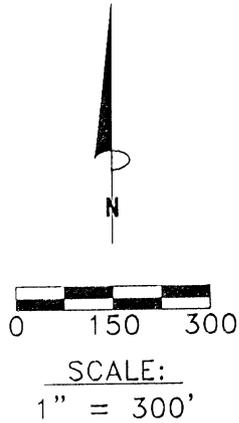

LEGEND

- 5/8" x 30" (15" in roadway) iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Surveyed - Mathematically
Hocking County Engineer's Office
LPG DATE 8-29-00

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0019 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 159.95 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing North 13 degrees 05 minutes 59 seconds West a distance of 199.61 feet to a 5/8" iron pin set;

thence North 75 degrees 12 minutes 57 seconds East a distance of 969.60 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 762.06 feet, 833.52 feet, and 953.75 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

- 1) South 13 degrees 05 minutes 59 seconds East a distance of 238.96 feet to a 5/8" iron pin set;
- 2) South 12 degrees 54 minutes 30 seconds East a distance of 11.05 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 78 degrees 11 minutes 41 seconds West a distance of 969.40 feet to the point of beginning, passing 5/8" iron pins set at distances of 12.85 feet, 145.51 feet, and 270.21 feet, containing 5.0019 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0019 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including August 3, 2000.

Approved - Mathematically
Hocking County Engineer's Office

JyA DATE 8-29-00

Larry P. Gerstner



Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0014 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0014 ac.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter and part of the Northwest quarter both of Section 16, Township 13, Range 16.

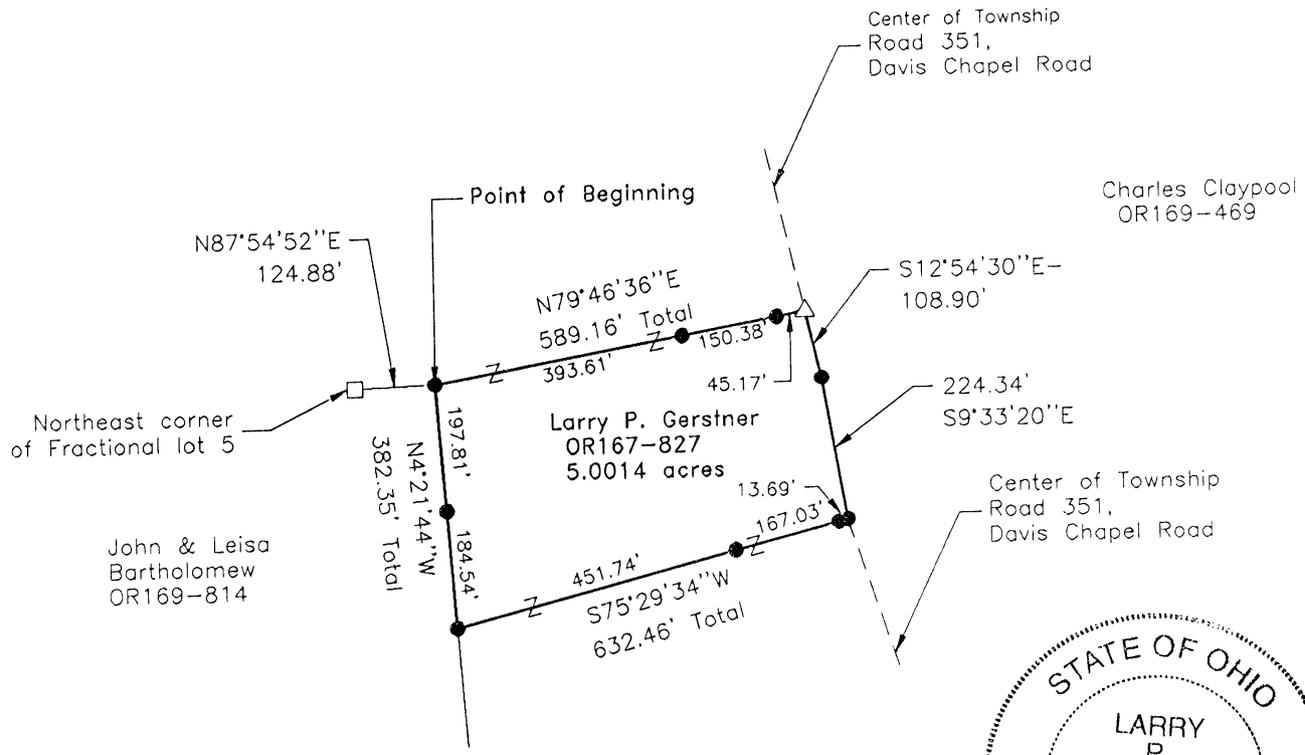

Approved Mathematically
Hocking County Engineer's Office

MAG 92 DATE 8-1-00




REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

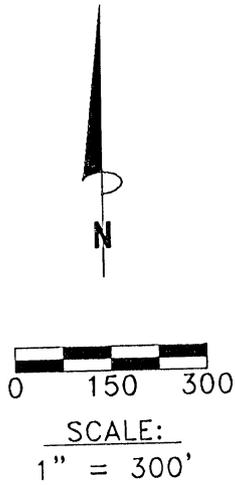

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon up to and including the 28th day of July, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0014 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter and part of the Northwest quarter both of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of said Fractional Lot 5; thence North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 79 degrees 46 minutes 36 seconds East a distance of 589.16 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 393.61 feet, and 543.99 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

- 1) South 12 degrees 54 minutes 30 seconds East a distance of 108.90 feet to a 5/8" iron pin set;
- 2) South 9 degrees 33 minutes 20 seconds East a distance of 224.34 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 351 South 75 degrees 29 minutes 34 seconds West a distance of 632.46 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 13.69 feet and 180.72 feet;

thence North 4 degrees 21 minutes 44 seconds West a distance of 382.35 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 184.54 feet, containing 5.0014 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0014 acre survey is intended to describe part of the 82.68 acre Tract Two and the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including July 28, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY M. J. [Signature] DATE 8-9-00

Larry P. Gerstner



Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0013 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0013 Ac.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

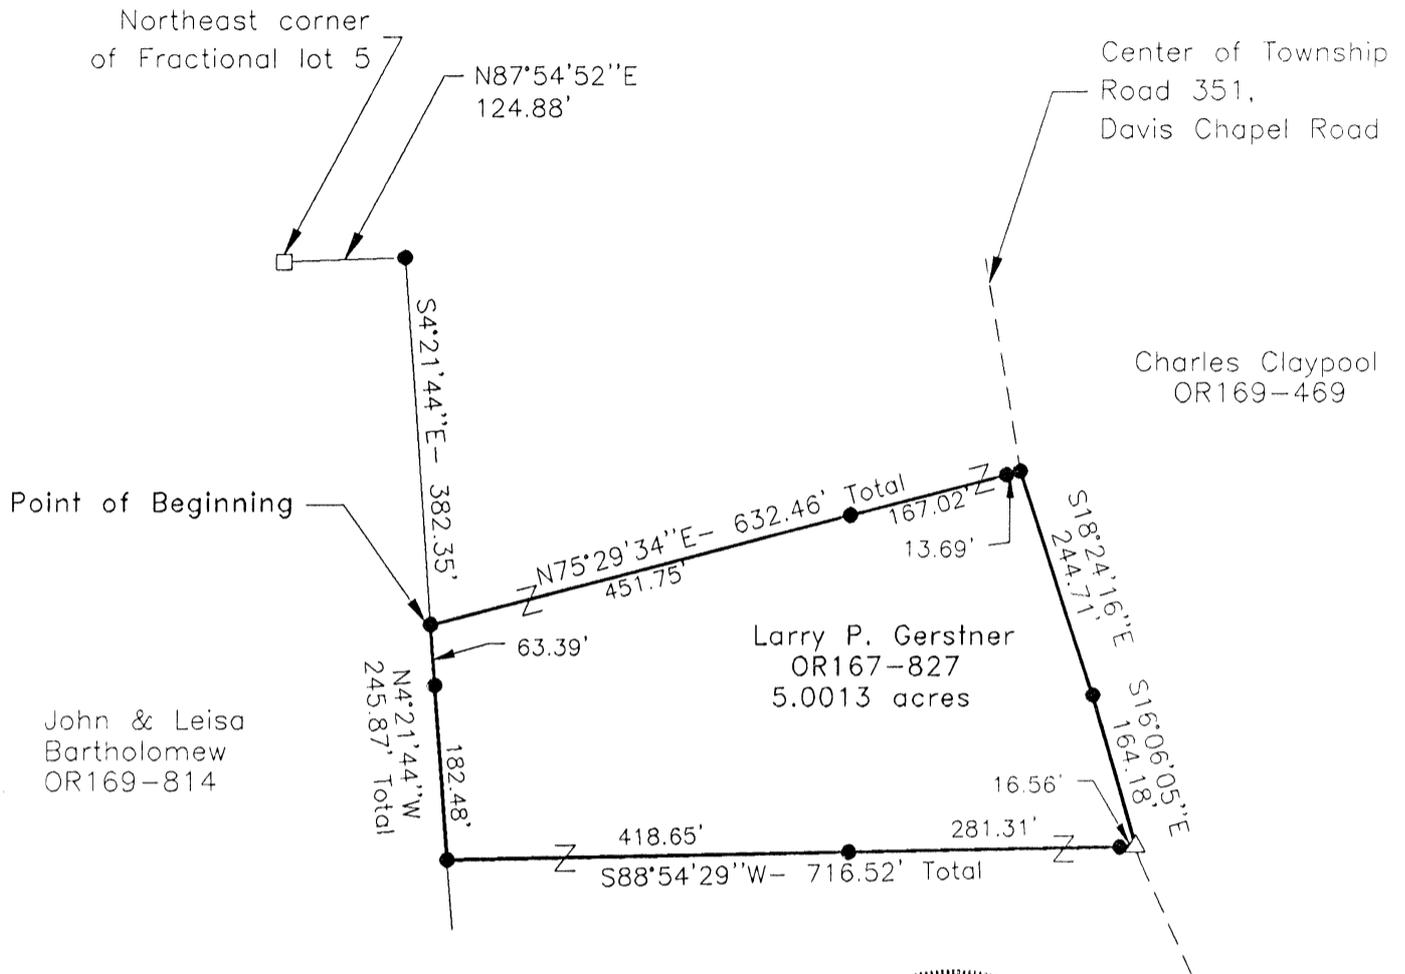


Approved - Mathematically
Hocking County Engineer's Office

Jydw 22 DATE 8-9-00



REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



SCALE:
1" = 200'

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon up to and including the 28th day of July, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0013 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of said Fractional Lot 5; thence North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set; thence South 4 degrees 21 minutes 44 seconds East a distance of 382.35 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 75 degrees 29 minutes 34 seconds East a distance of 632.46 feet to a 5/8" iron pin set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 451.75 feet, and 618.77 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

1) South 18 degrees 24 minutes 16 seconds East a distance of 244.71 feet to a 5/8" iron pin set;

2) South 16 degrees 06 minutes 05 seconds East a distance of 164.18 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 88 degrees 54 minutes 29 seconds West a distance of 716.52 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 16.56 feet and 297.87 feet;

thence North 4 degrees 21 minutes 44 seconds West a distance of 245.87 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 182.48 feet, containing 5.0013 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0013 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including July 28, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-9-00




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 5.0012 ACRE TRACT FOR THE BOY SCOUT PROPERTY

GREEN 16
5-0012 AC.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

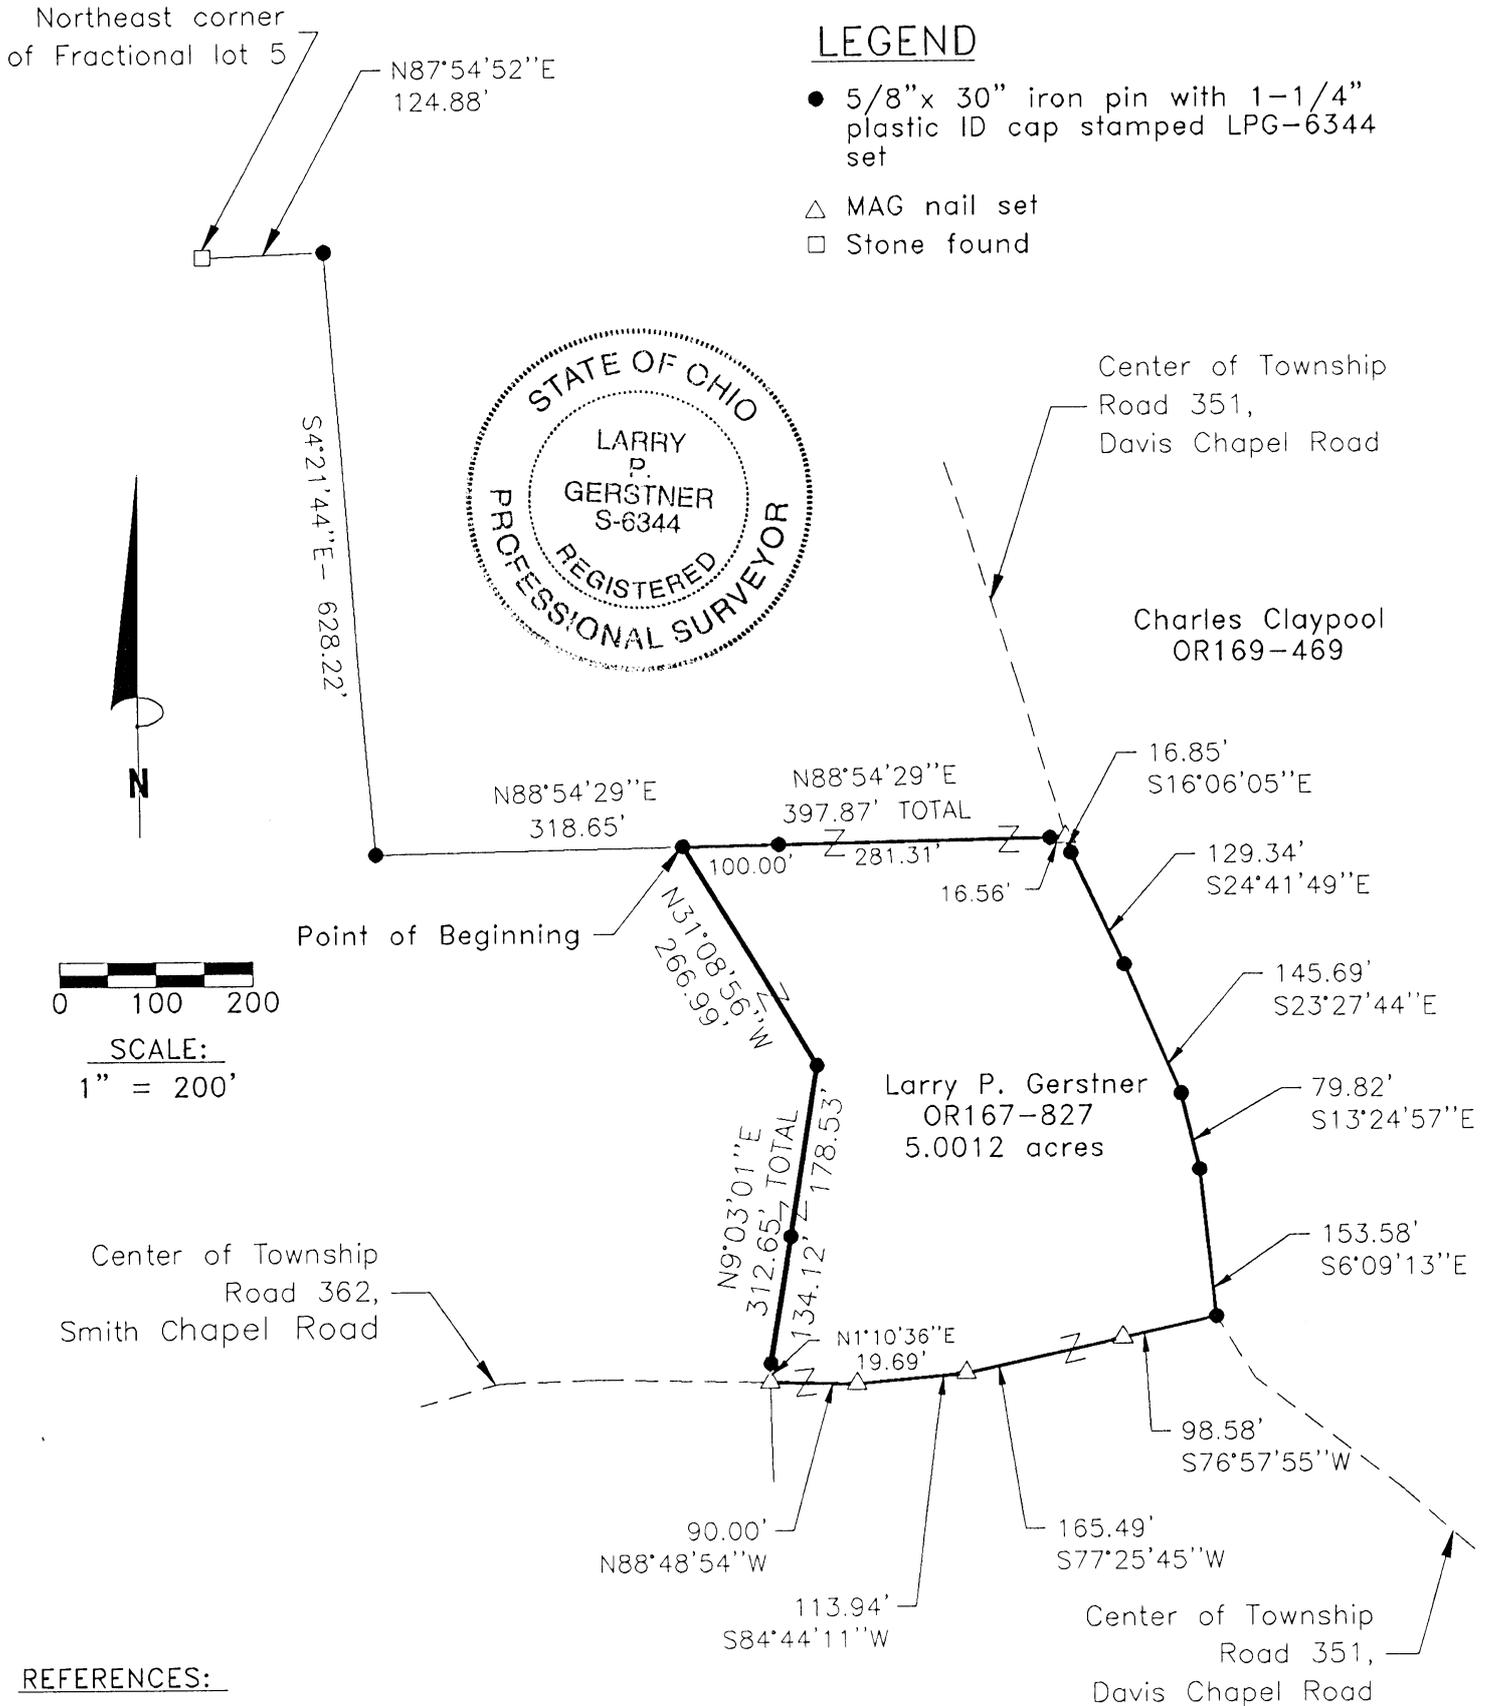

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
Hocking County Engineer's Office

BY *J. P. Gerstner* DATE 3-20-01
As Revised

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon up to and including the 16th day of March, 2001 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0012 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of said Fractional Lot 5; thence North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set; thence South 4 degrees 21 minutes 44 seconds East a distance of 628.22 feet to a 5/8" iron pin set; thence North 88 degrees 54 minutes 29 seconds East a distance of 318.65 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing North 88 degrees 54 minutes 29 seconds East a distance of 397.87 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 100.00 feet and 381.31 feet;

thence with the center of said Township Road 351 the following five bearings and distances:

- 1) South 16 degrees 06 minutes 05 seconds East a distance of 16.85 feet to a 5/8" iron pin set;
- 2) South 24 degrees 41 minutes 49 seconds East a distance of 129.34 feet to a 5/8" iron pin set;
- 3) South 23 degrees 27 minutes 44 seconds East a distance of 145.69 feet to a 5/8" iron pin set;
- 4) South 13 degrees 24 minutes 57 seconds East a distance of 79.82 feet to a 5/8" iron pin set;
- 5) South 6 degrees 09 minutes 13 seconds East a distance of 153.58 feet to a 5/8" iron pin set in the

intersection of Township Road 362, Smith Chapel Road;

thence leaving the center of said Township Road 351 and with the center of said Township Road 362 the following four bearings and distances:

- 1) South 76 degrees 57 minutes 55 seconds West a distance of 98.58 feet to a MAG nail set;
- 2) South 77 degrees 25 minutes 45 seconds West a distance of 165.49 feet to a MAG nail set;
- 3) South 84 degrees 44 minutes 11 seconds West a distance of 113.94 feet to a MAG nail set;
- 4) North 88 degrees 48 minutes 54 seconds West a distance of 90.00 feet to a MAG nail set;

thence leaving the center of said Township Road 362 North 1 degree 10 minutes 36 seconds East a distance of 19.69 feet to a 5/8" iron pin set;

thence North 9 degrees 03 minutes 01 second East a distance of 312.65 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 134.12 feet;

thence North 31 degrees 08 minutes 56 seconds West a distance of 266.99 feet to the point of beginning, containing 5.0012 acres more or less, and subject to the public easements of said Township Roads 351 and 362 and any other public or private easements of record.


The above 5.0012 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including March 16, 2001.

Approved - Mathematically
Hocking County Engineer's Office

BY JMA DATE 3-20-01

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4280

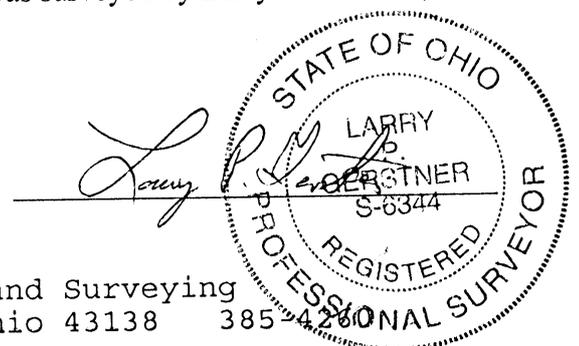


GREEN 16
5-336 Ac.

PLAT OF A 5.336 ACRE TRACT FOR JAMES WALLER

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16.

Approved - Mathematically
 Hocking County Engineer's Office

BY LAW DATE 7-18-00

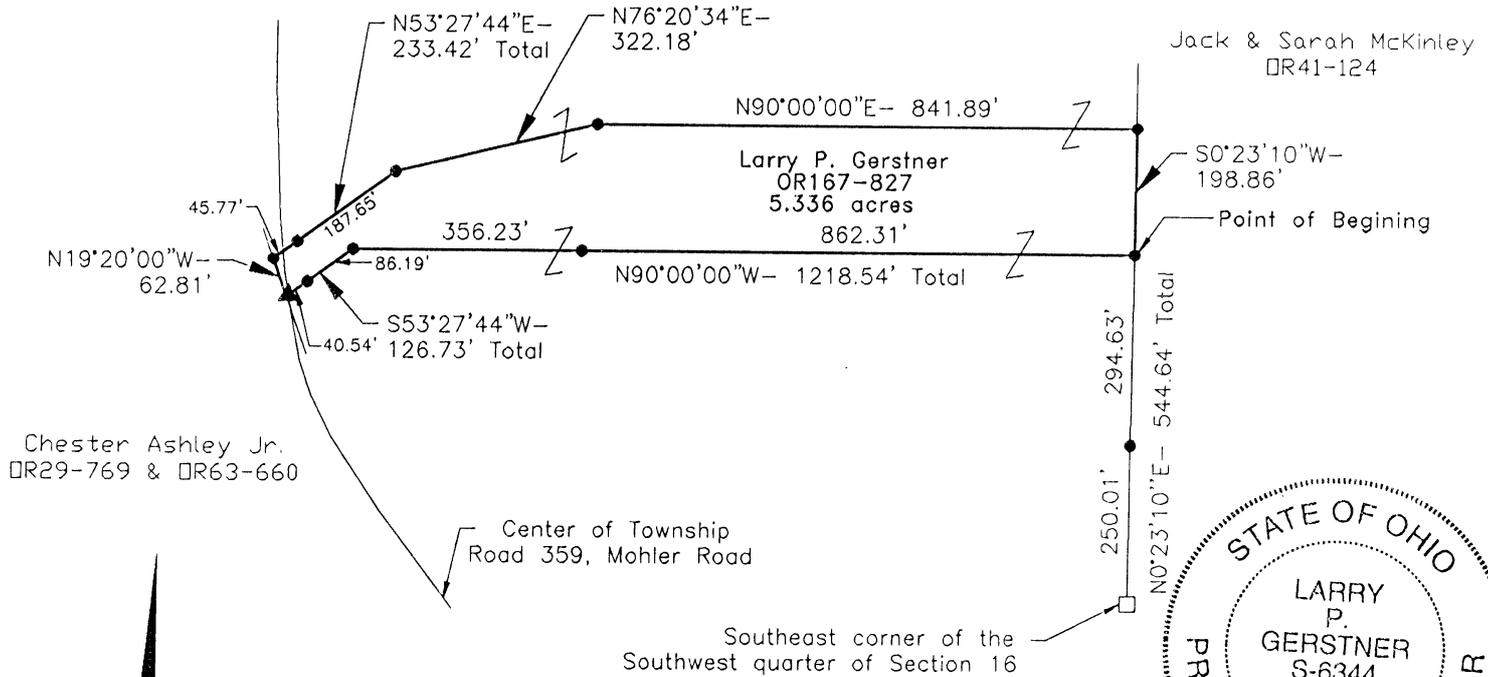

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

REFERENCE BEARING:

The South line of Section 16 as North 89 degrees 58 minutes 50 seconds West Bearings are based upon assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.336 ACRE TRACT FOR JAMES WALLER

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 544.64 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 250.01 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 90 degrees 00 minutes 00 seconds West a distance of 1218.54 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 862.31 feet;

thence South 53 degrees 27 minutes 44 seconds West a distance of 126.73 feet to a MAG nail set in the surface of Township Road 359, Mohler Road, and passing a 5/8" iron pin set at a distance of 86.19 feet;

thence with the surface of said Township Road 359 North 19 degrees 20 minutes 00 seconds West a distance of 62.81 feet to a 5/8" iron pin set;

thence crossing and leaving the surface of said Township Road 359 North 53 degrees 27 minutes 44 seconds East a distance of 233.42 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 45.77 feet;

thence North 76 degrees 20 minutes 34 seconds East a distance of 322.18 feet to a 5/8" iron pin set;

thence North 90 degrees 00 minutes 00 seconds East a distance of 841.89 feet to a 5/8" iron pin set;

thence South 0 degrees 23 minutes 10 seconds West a distance of 198.86 feet to the point of beginning, containing 5.336 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 5.336 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 7-18-00



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
7.846 Ac.


PLAT OF A 7.846 ACRE TRACT FOR JAMIE GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.




REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

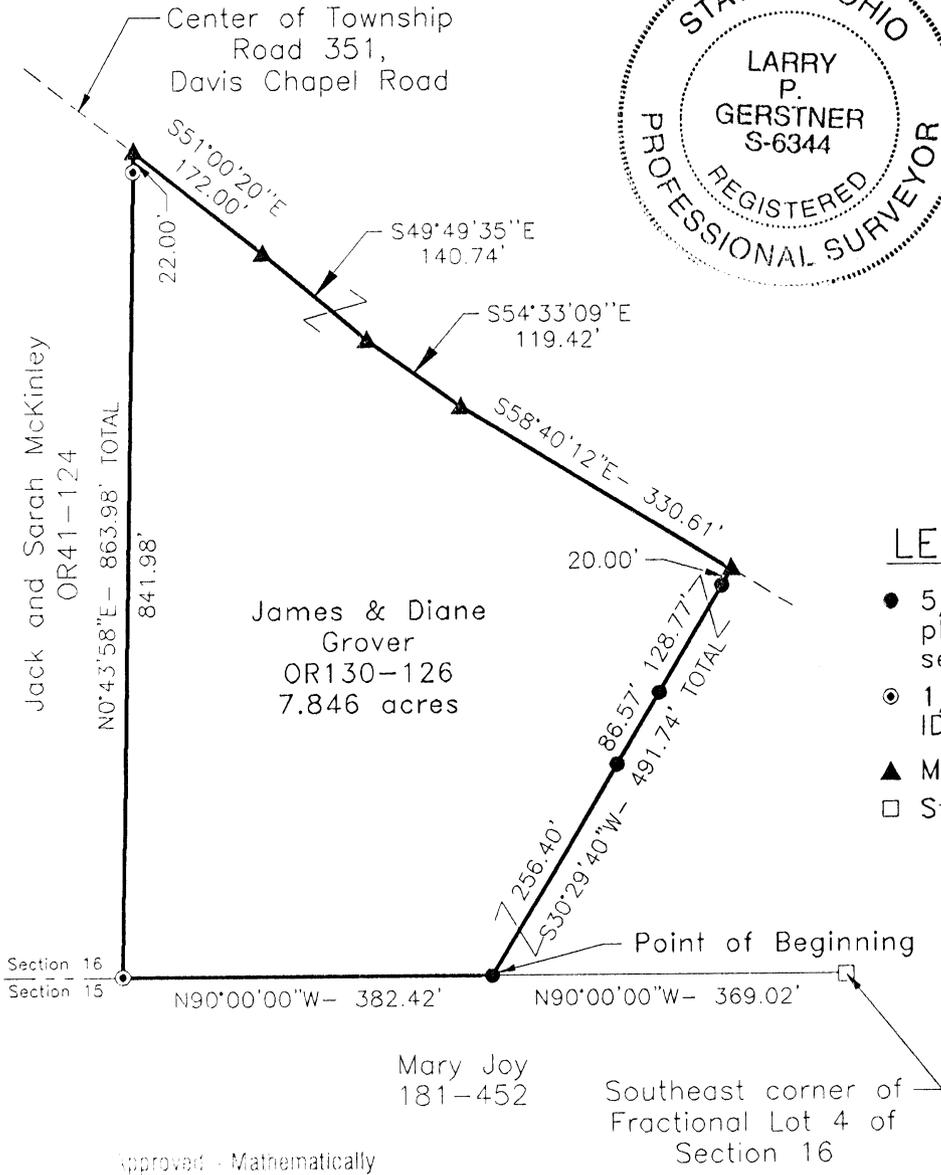

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ⊙ 1/2" iron pin with 1-1/4" plastic ID cap stamped MPB-6803 found
- ▲ MAG nail set
- Stone found



SCALE:
 1" = 200'

Approved - Mathematically
 Hocking County Engineer's Office

BY *J.P.G.* DATE *9-3-99*

REFERENCE BEARING:

The South line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 30th day of August, 1999 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 7.846 ACRE TRACT FOR JAMIE GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of Fractional Lot 4 of Section 16; thence with the South line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 369.02 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing with the South line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 382.42 feet to a 1/2" iron pin with 1-1/4" plastic ID cap stamped MPB-6803 found;

thence leaving the South line of Section 16 North 0 degrees 43 minutes 58 seconds East a distance of 863.98 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing a 1/2" iron pin with 1-1/4" plastic ID cap stamped MPB-6803 found at a distance of 841.98 feet;

thence with the center of said Township Road 351 the following four bearings and distances:

1) South 51 degrees 00 minutes 20 seconds East a distance of 172.00 feet to a MAG nail set;

2) South 49 degrees 49 minutes 35 seconds East a distance of 140.74 feet to a MAG nail set;

3) South 54 degrees 33 minutes 09 seconds East a distance of 119.42 feet to a MAG nail set;


4) South 58 degrees 40 minutes 12 seconds East a distance of 330.61 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 30 degrees 29 minutes 40 seconds West a distance of 491.74 feet to the point of beginning, passing 5/8" iron pins set at distances of 20.00 feet, 148.77 feet, and 235.34 feet, containing 7.846 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 7.846 acre survey is intended to describe part of the 35.00 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 30, 1999.

Approved - Mathematically
Hocking County Engineer's Office

BY MAW DATE 9-3-99

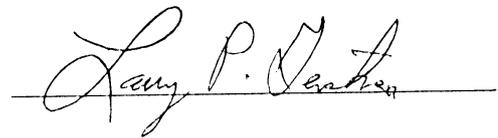

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260


GREEN 16
2.301Ac.

PLAT OF A 2.301 ACRE TRACT FOR JAMIE GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 previously set
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ PK nail found
- ▲ MAG nail set
- Stone found

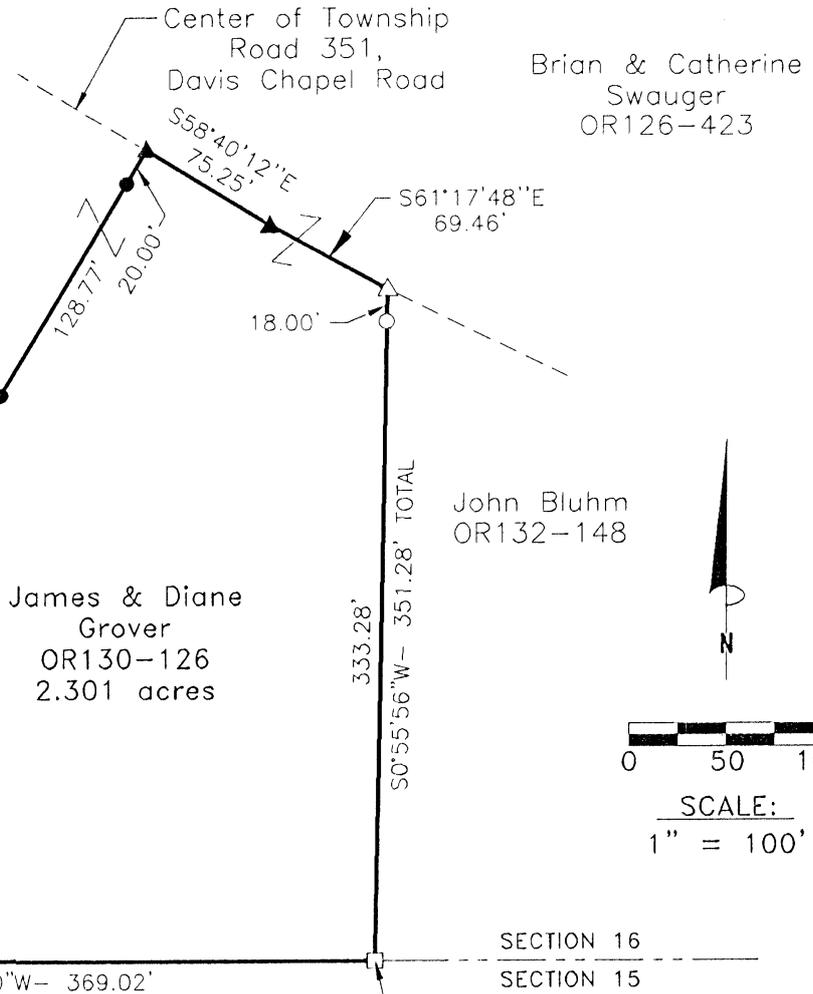

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Mary Joy 181-452

Approved - Mathematically
Hocking County Engineer's Office

SUBDIVISION REGULATIONS WAIVED
PENDING HEALTH DEPT. APPROVAL

REFERENCE BEARING:

BY JPG DATE 9-2-99

BY JPG DATE 9-2-99

The South line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 30th day of August, 1999 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 2.301 ACRE TRACT FOR JAMIE GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Southeast corner of Fractional Lot 4 of Section 16; thence with the South line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 369.02 feet to a 5/8" iron pin set;

thence leaving the South line of Section 16 North 30 degrees 29 minutes 40 seconds East a distance of 491.74 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distance of 256.40 feet, 342.97 feet, and 471.74 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

1) South 58 degrees 40 minutes 12 seconds East a distance of 75.25 feet to a MAG nail set;


2) South 61 degrees 17 minutes 48 seconds East a distance of 69.46 feet to a PK nail found;

thence leaving the center of said Township Road 351 South 0 degrees 55 minutes 56 seconds West a distance of 351.28 feet to the point of beginning, passing a 5/8" iron pin previously set at a distance of 18.00 feet, containing 2.301 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 2.301 acre survey is intended to describe part of the 35.00 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey or previously set are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 30, 1999.

Mathematically
Hocking County Engineer's Office

BY LPG DATE 9-2-99

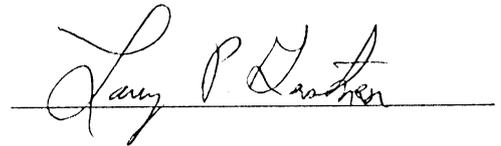

SUBDIVISION REGULATIONS WAIVED
PENDING HEALTH DEPT. APPROVAL

BY LPG DATE 9-2-99



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16


PLAT OF A 5.611 ACRE TRACT FOR JAMES GROVER

5.611Ac.


Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- △ MAG nail previously set
- Stone found

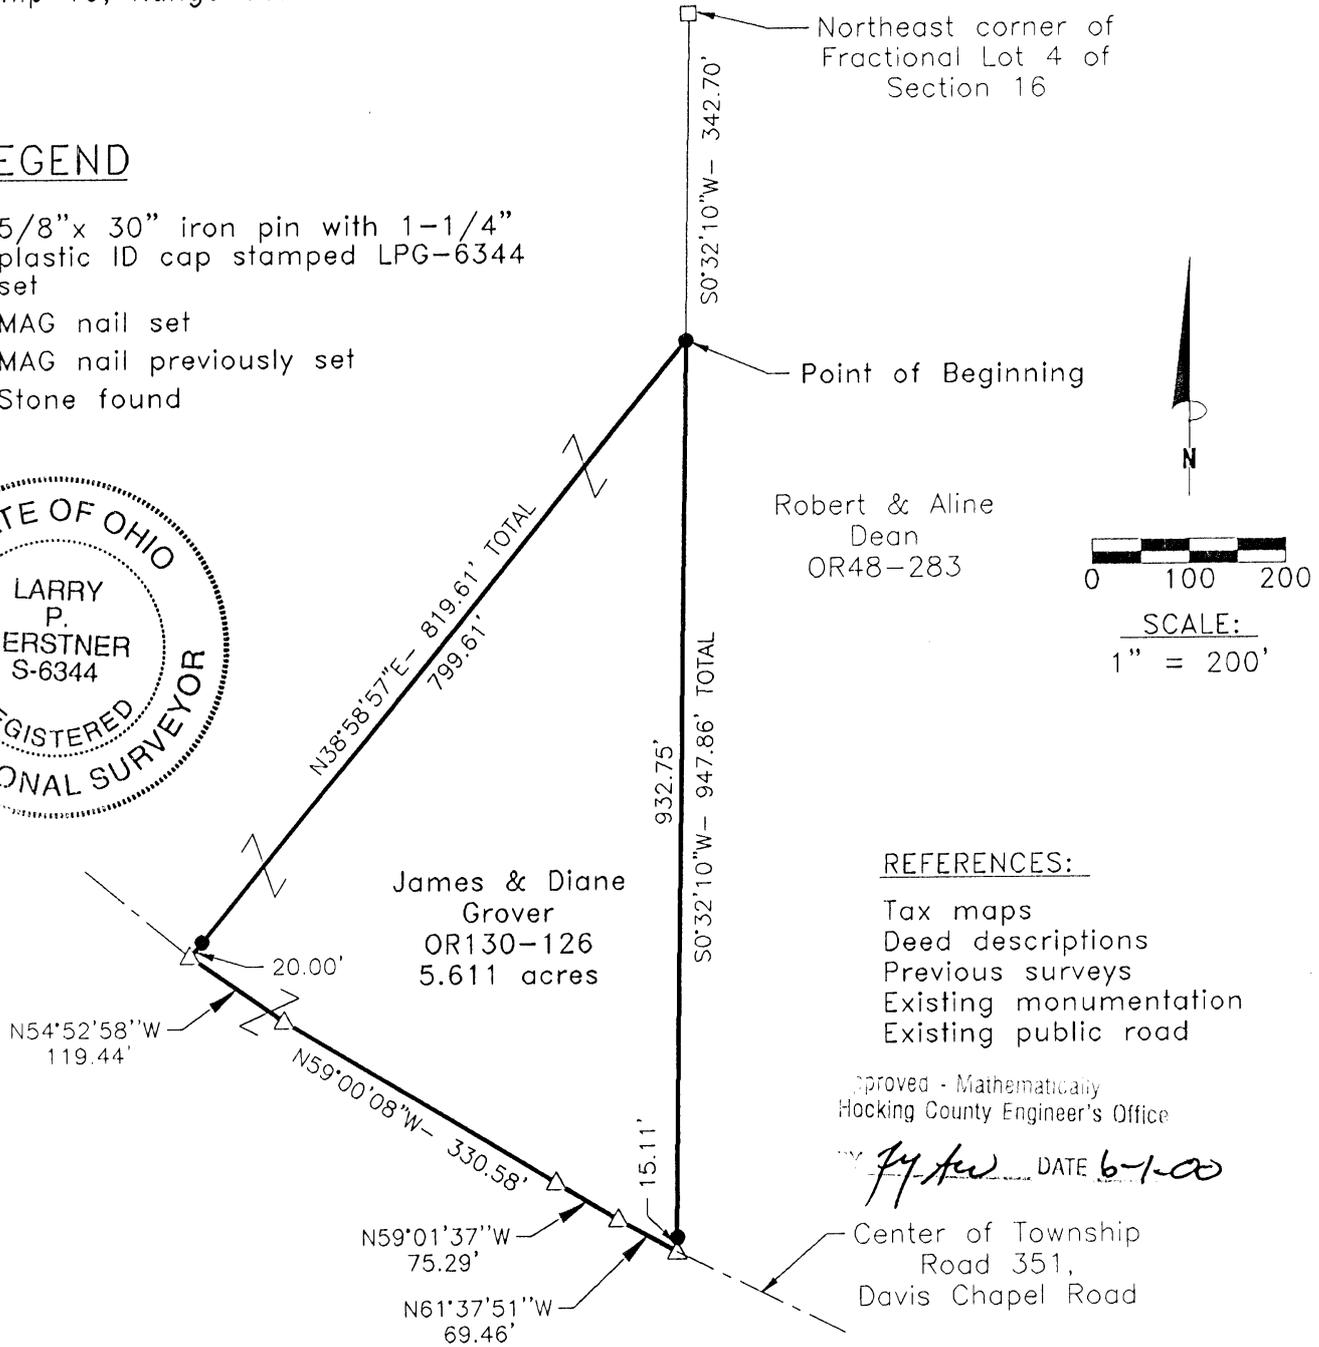

Robert & Aline Dean
OR48-283

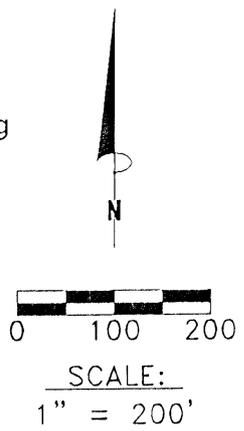

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 6-1-00

Center of Township Road 351,
Davis Chapel Road

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.611 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of Fractional Lot 4 of Section 16; thence South 0 degrees 32 minutes 10 seconds West a distance of 342.70 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing South 0 degrees 32 minutes 10 seconds West a distance of 947.86 feet to a MAG nail found in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 932.75 feet;

thence with the center of said Township Road 351 the following four bearings and distances:

1) North 61 degrees 37 minutes 51 seconds West a distance of 69.46 feet to a MAG nail previously set;

2) North 59 degrees 01 minute 37 seconds West a distance of 75.29 feet to a MAG nail previously set;

3) North 59 degrees 00 minutes 08 seconds West a distance of 330.58 feet to a MAG nail previously set;

4) North 54 degrees 52 minutes 58 seconds West a distance of 119.44 feet to a MAG nail previously set;

thence leaving the center of said Township Road 351 North 38 degrees 58 minutes 57 seconds East a distance of 819.61 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 20.00 feet; containing 5.611 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.611 acre survey is intended to describe part of the 33.65 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY L.P.G. DATE 6-7-00

Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.003 Ac.

PLAT OF A 5.003 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road

Charles C. Claypool
OR169-469

Northeast corner of
Fractional Lot 4 of
Section 16
Point of Beginning

LEGEND



- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- △ MAG nail previously set
- Stone found

Robert & Aline
Dean
OR48-283



Approved - Mathematically
Hocking County Engineer's Office

L. P. Gerstner DATE 5-31-00

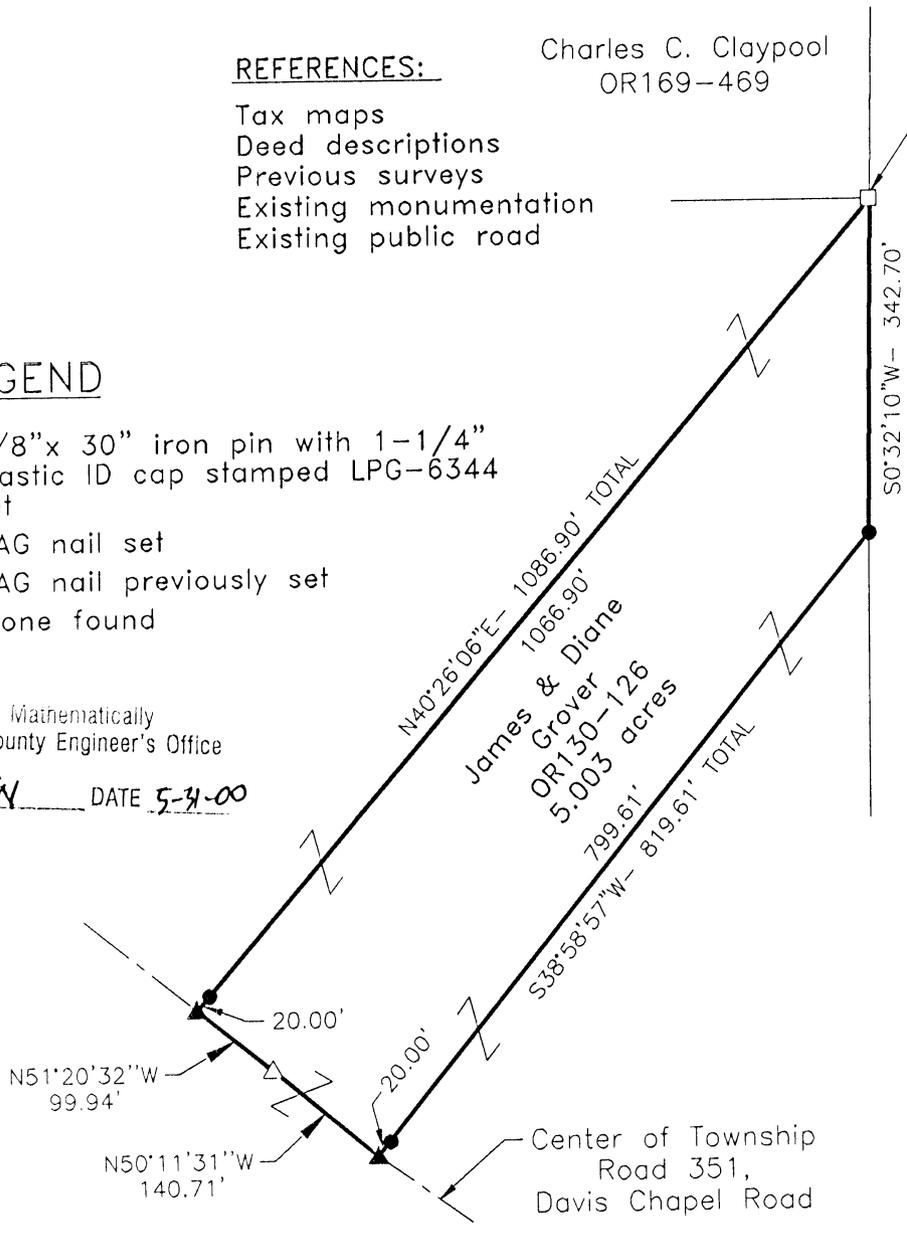

SCALE:
1" = 200'

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.003 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of Fractional Lot 4 of Section 16; thence South 0 degrees 32 minutes 10 seconds West a distance of 342.70 feet to a 5/8" iron pin set;

thence South 38 degrees 58 minutes 57 seconds West a distance of 819.61 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 799.61 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

1) North 50 degrees 11 minutes 31 seconds West a distance of 140.71 feet to a MAG nail previously set;

2) North 51 degrees 20 minutes 32 seconds West a distance of 99.94 feet to a MAG nail set;

thence leaving the center of said Township Road 351 North 40 degrees 26 minutes 06 seconds East a distance of 1086.90 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 20.00 feet, containing 5.003 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.003 acre survey is intended to describe part of the 33.65 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

LPGN DATE *5-31-00*

Larry P. Gerstner





Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.002 AC.

PLAT OF A 5.002 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

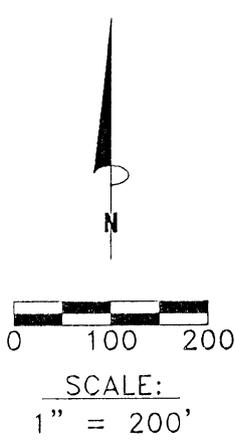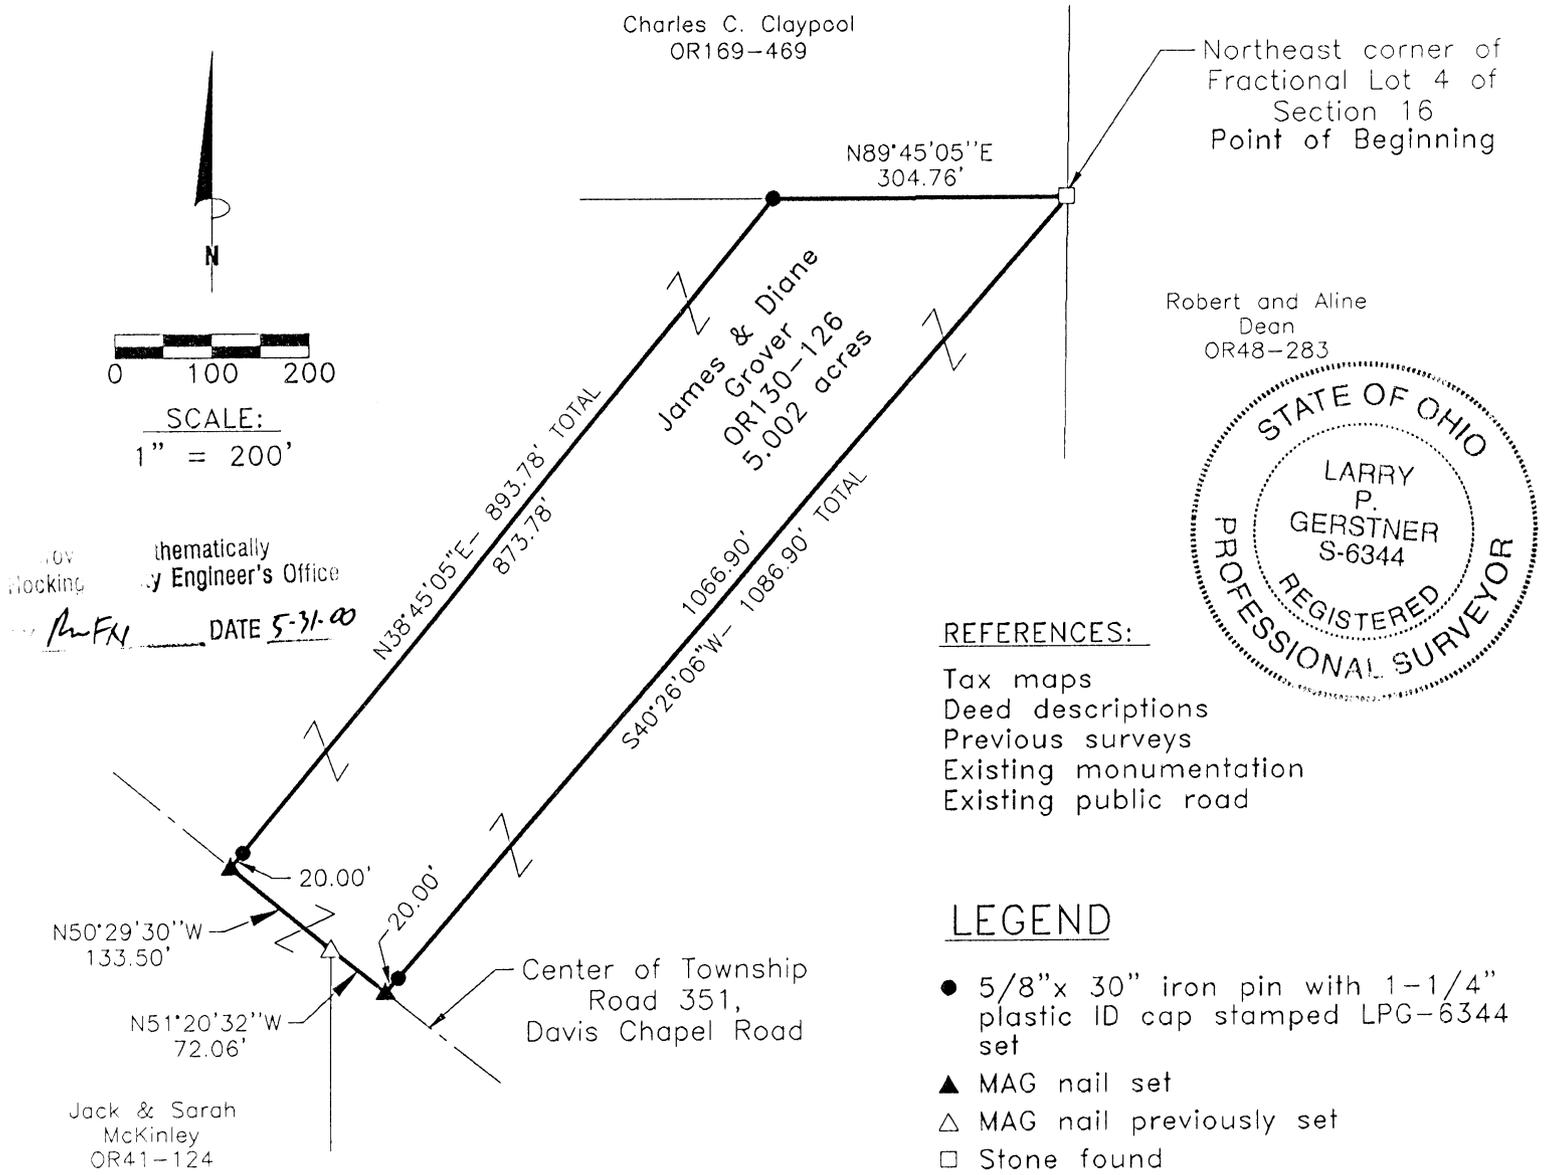

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- △ MAG nail previously set
- Stone found

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.002 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of Fractional Lot 4 of Section 16; thence South 40 degrees 26 minutes 06 seconds West a distance of 1086.90 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 1066.90 feet; thence with the center of said Township Road 351 the following two bearings and distances:

1) North 51 degrees 20 minutes 32 seconds West a distance of 72.06 feet to a MAG nail previously set;

2) North 50 degrees 29 minutes 30 seconds West a distance of 133.50 feet to a MAG nail set; thence leaving the center of said Township Road 351 North 38 degrees 45 minutes 05 seconds East a distance of 893.78 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 20.00 feet; thence North 89 degrees 45 minutes 05 seconds East a distance of 304.76 feet to the point of beginning, containing 5.002 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.002 acre survey is intended to describe part of the 33.65 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY RFN DATE 5-31-00





Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.000 ACRE TRACT FOR SHELLEY PHILLIPS

5.00 Ac.

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

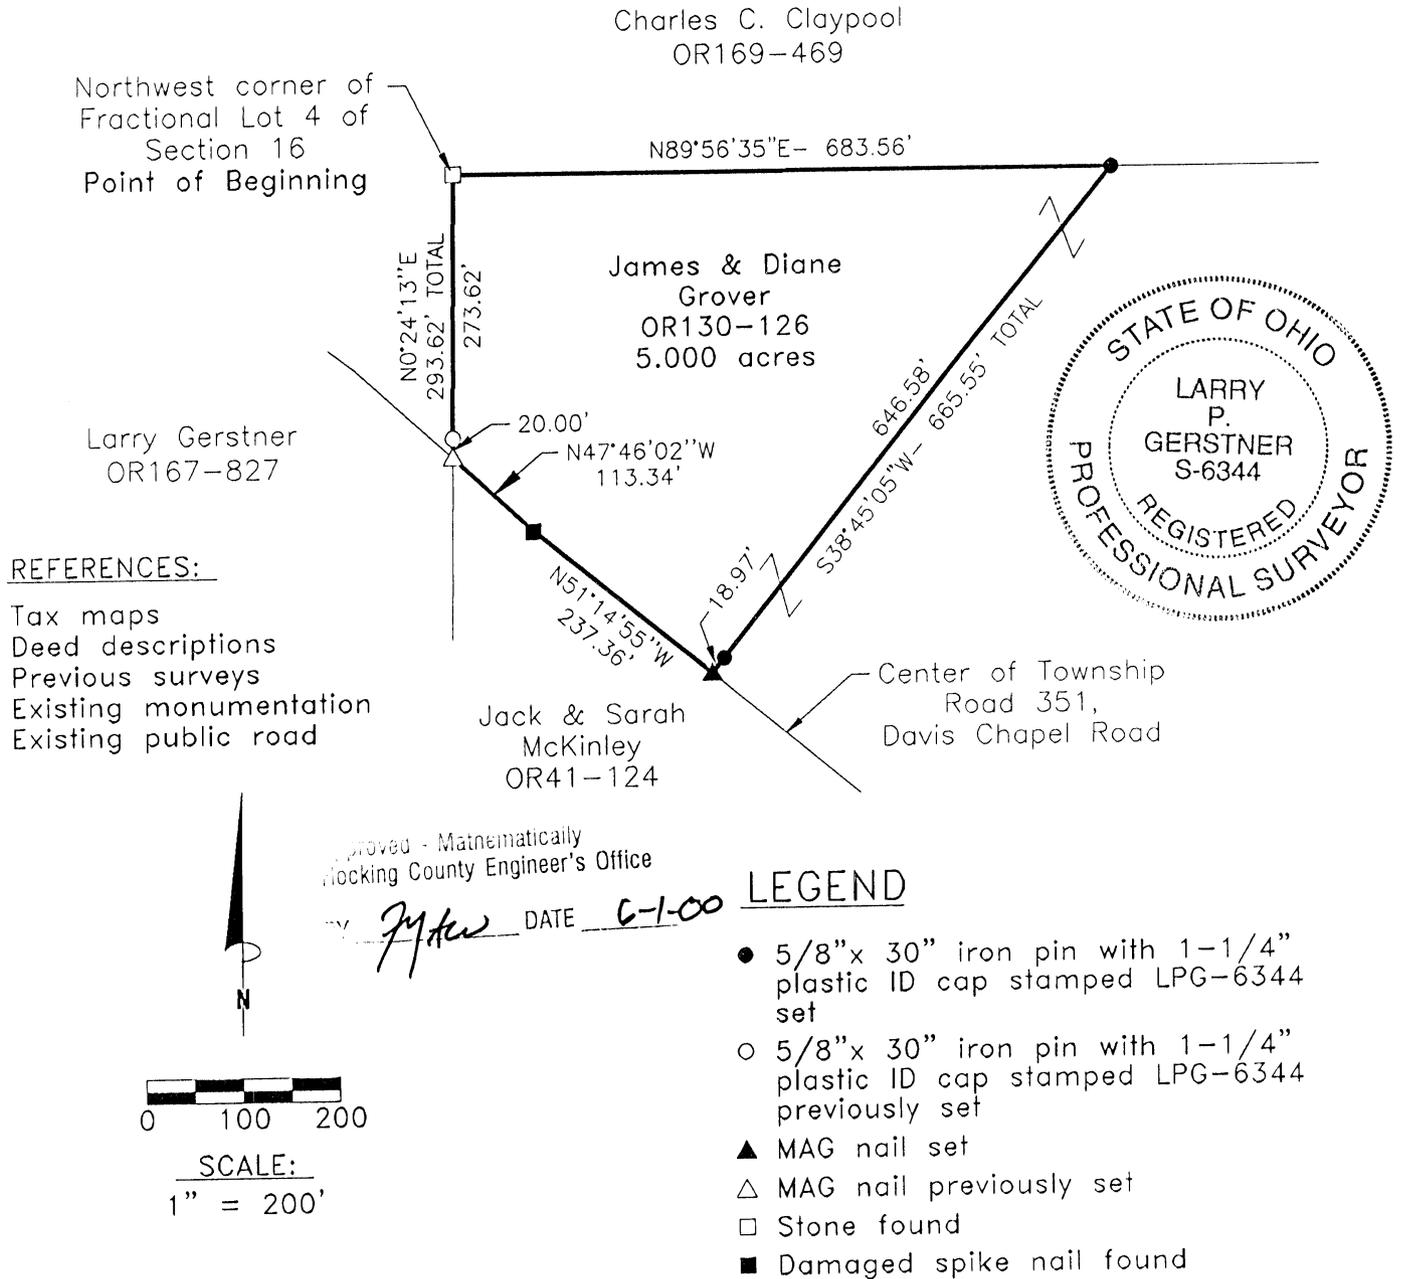

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.000 ACRE TRACT FOR SHELLEY PHILLIPS

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northwest corner of Fractional Lot 4 of Section 16; thence North 89 degrees 56 minutes 35 seconds East a distance of 683.56 feet to a 5/8" iron pin set;

thence South 38 degrees 45 minutes 05 seconds West a distance of 665.55 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 646.58 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

1) North 51 degrees 14 minutes 55 seconds West a distance of 237.36 feet to a damaged spike nail found;

2) North 47 degrees 46 minutes 02 seconds West a distance of 113.34 feet to a MAG nail previously set;

thence leaving the center of said Township Road 351 North 0 degrees 24 minutes 13 seconds East a distance of 293.62 feet to the point of beginning, passing a 5/8" iron pin previously set at a distance of 20.00 feet, containing 5.000 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.000 acre survey is intended to describe part of the 33.65 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey or previously set are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY L.P.G. DATE 6-1-00

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.001 AC


PLAT OF A 5.001 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16.

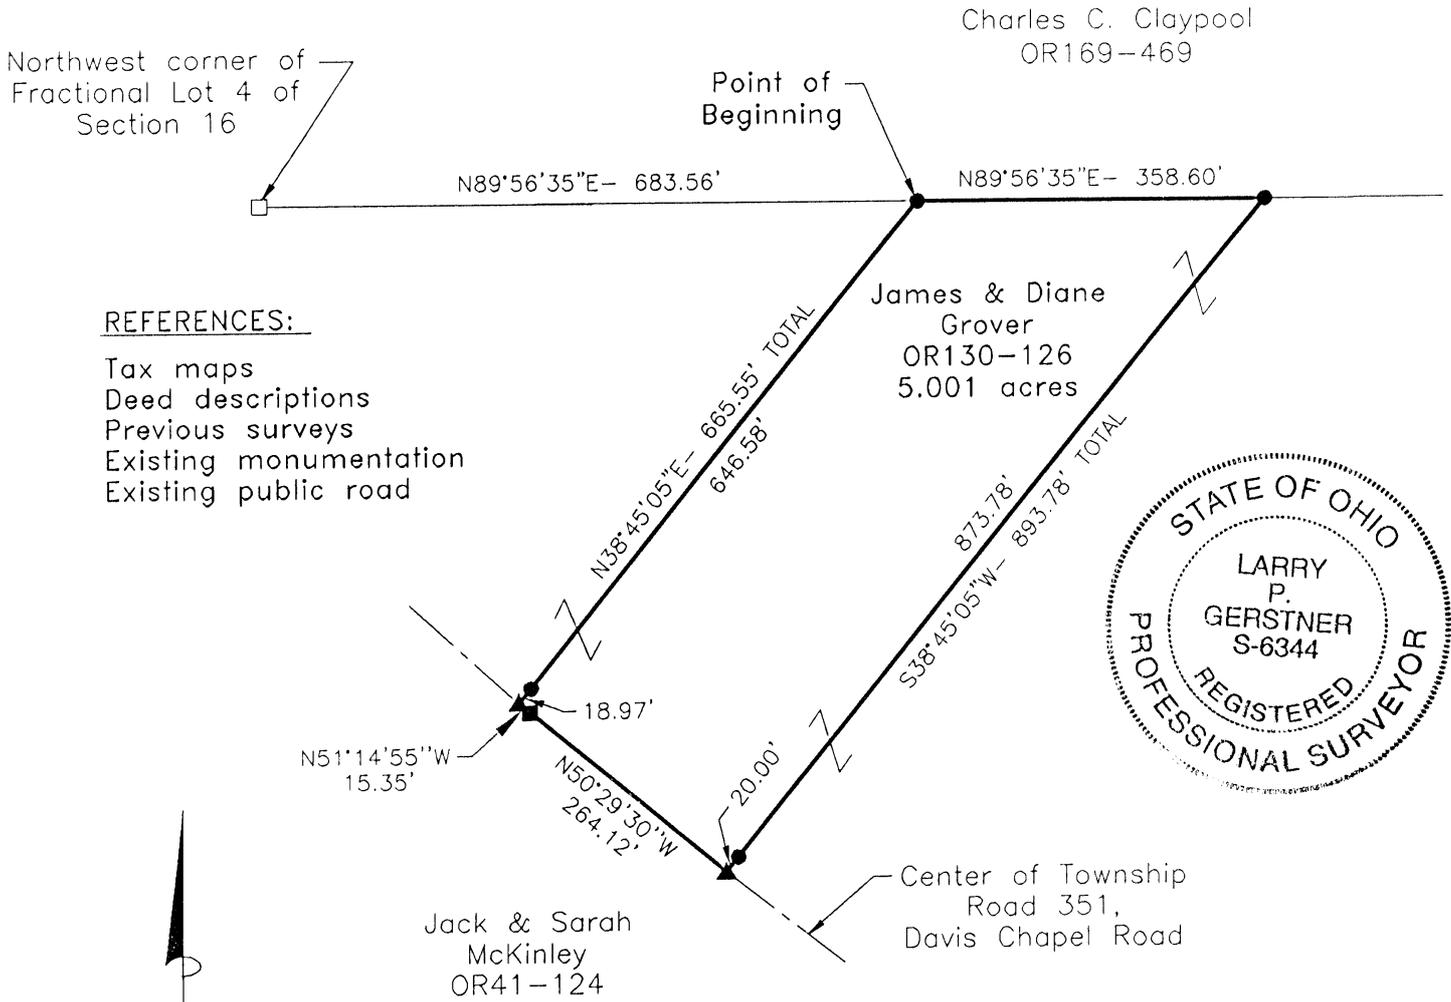

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 6-1-00

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found
- Damaged spike nail found

REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.001 ACRE TRACT FOR JAMES GROVER

Situated in Green Township, Hocking County, Ohio; being part of Fractional Lot 4 of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 4 of Section 16; thence North 89 degrees 56 minutes 35 seconds East a distance of 683.56 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing North 89 degrees 56 minutes 35 seconds East a distance of 358.60 feet to a 5/8" iron pin set;

thence South 38 degrees 45 minutes 05 seconds West a distance of 893.78 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 873.78 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

1) North 50 degrees 29 minutes 30 seconds West a distance of 264.12 feet to a damaged spike nail found;

2) North 51 degrees 14 minutes 55 seconds West a distance of 15.35 feet to a MAG nail set;

thence leaving the center of said Township Road 351 North 38 degrees 45 minutes 05 seconds East a distance of 665.55 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 18.97 feet, containing 5.001 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.001 acre survey is intended to describe part of the 33.65 acre tract as deeded to James and Diane Grover, deed reference Volume OR130, Page 126, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 31, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY JPG DATE 6-1-00

 Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

BEING A PART OF FRAC. LOT NO. A OF SEC. 16 GREEN
TWP., T-13N, R-16W, HOCKING CO., OHIO

15.00 AC.
Lot 4 Pt.

NOTE: CITED BEARINGS ARE BASED ON THE WEST LINE OF FRAC. LOT A AS
RUNNING DUE NORTH & SOUTH.


REFERENCES:

COUNTY TAX PLATS
1880 PLAT RECORDS
DEEDS (AS NOTED ON PLAT)

Approved - Mathematically
Hocking County Engineer's office
By W. Moore Date 4-23-84


W. MOORE
VOL. 171, PG. 402

W. MOORE
VOL. 171, PG. 402

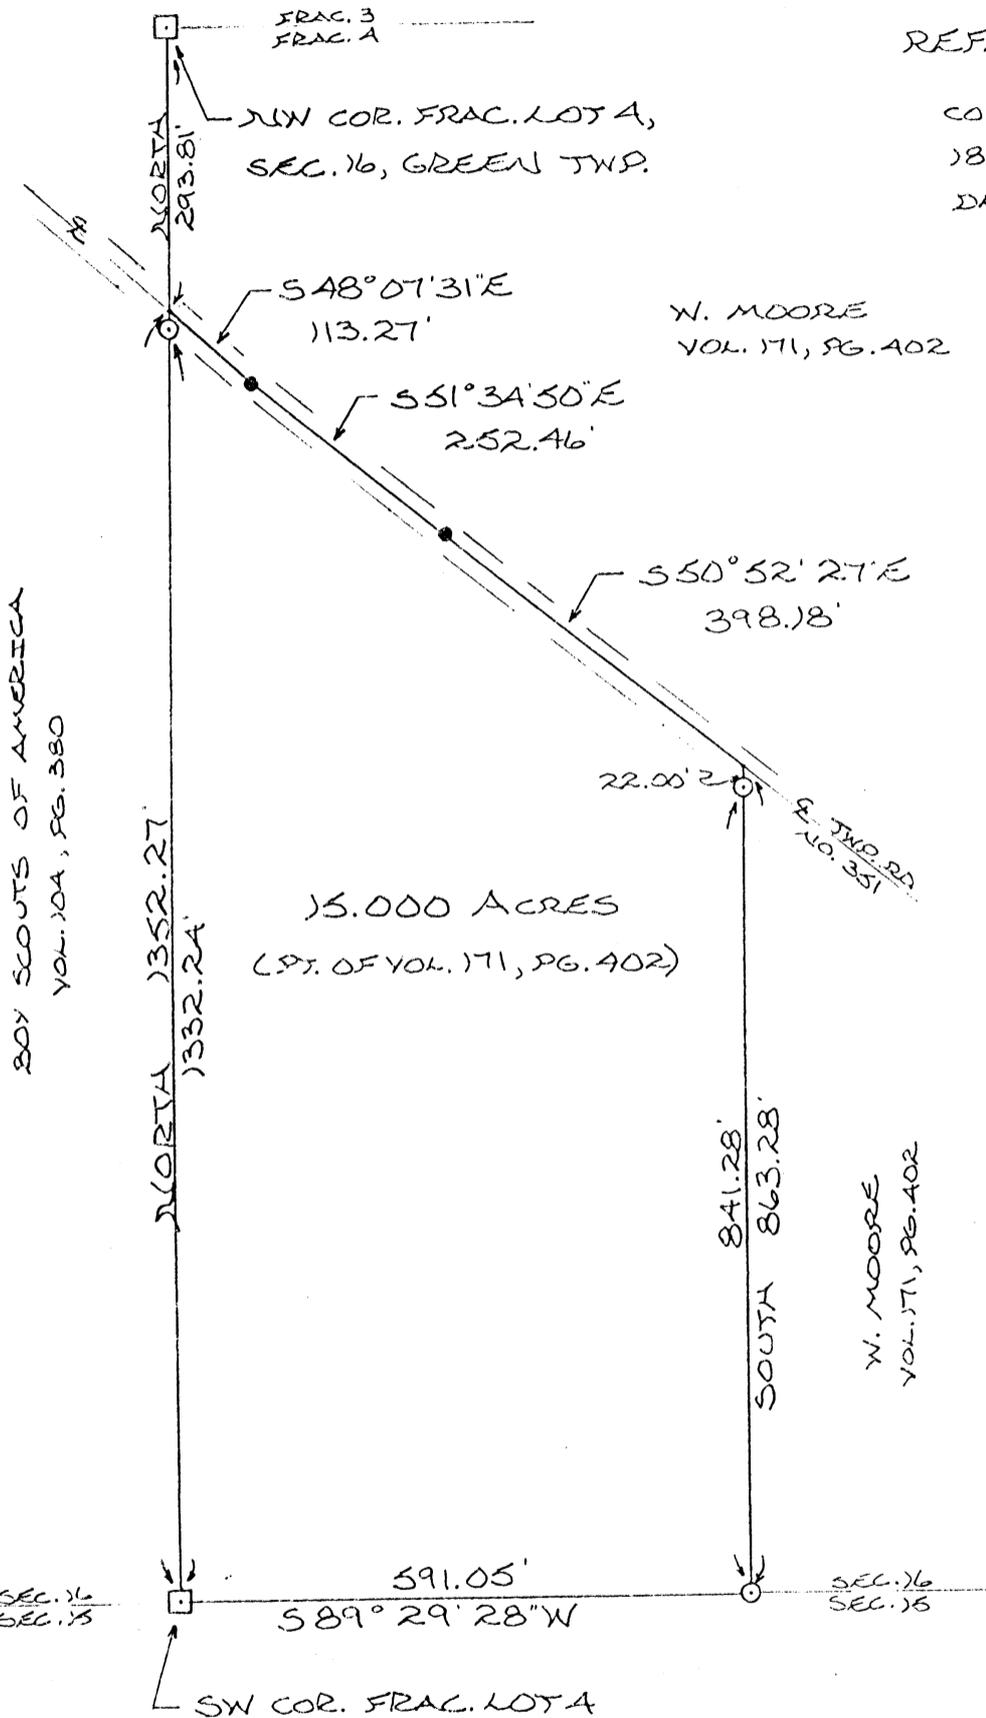

BOY SCOUTS OF AMERICA
VOL. 104, PG. 380

15.000 ACRES
(PT. OF VOL. 171, PG. 402)

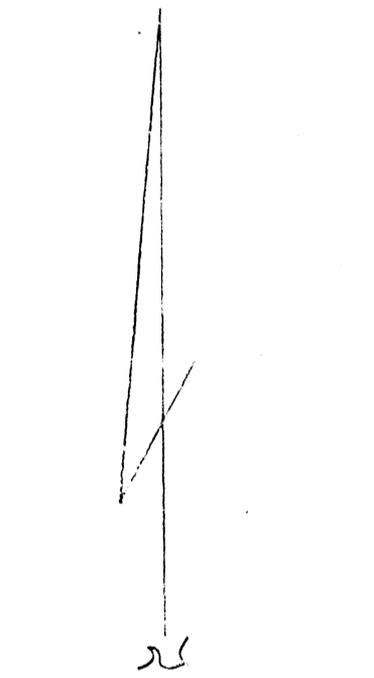

SCALE: 1" = 200'
0 100 200 300
□ = STONE (F)
○ = 1/2" IRON PIN (S)
W/ID CAP
● = SPIKE NAIL (S)

M. JOY
VOL. 109, PG. 185

I HEREBY DECLARE THAT THIS PLAT IS A
TRUE AND ACCURATE REPRESENTATION OF THE
PREMISES SHOWN HEREON AS DETERMINED
BY AN ACTUAL SURVEY MADE UNDER MY
DIRECT SUPERVISION ON THE 16TH DAY
OF APRIL, 1984.

Michael P. Berg
OHIO REGISTERED SURVEYOR NO. 6803

DESCRIPTION OF SURVEY FOR WALTER MOORE

Being a part of the premises described in Volume 171, Page 402, Hocking County Deed Records, situated in Frac. Lot No. 4 of Section 16 Green Twp., T-13N, R-16W, Hocking County, Ohio, and being more particularly described as follows:

Beginning at a point in the center of Twp. Rd. No. 351 (Davis-Chapel Rd.) from which a stone found on the Northwest corner of said Frac. Lot No. 4 bears North a distance of 293.81 ft.;

Thence, with the center of said Twp. Rd. No. 351 the following three (3) courses:

- 1.) S 48° 07' 31" E a distance of 113.27 ft. to a spike nail set;
- 2.) S 51° 34' 50" E a distance of 252.46 ft. to a spike nail set;
- 3.) S 50° 52' 27" E a distance of 398.18 ft. to a point;

Thence, leaving said Twp. Rd., South, passing an iron pin set at 22.00 ft., going a total distance of 863.28 ft to an iron pin set on the south line of Frac. Lot No. 4;

Thence, with the south line of said Frac. Lot No. 4, S 89° 29' 28" W a distance of 591.05 ft. to a stone found on the Southwest corner of Frac. Lot No. 4;

Thence, with the west line of Frac. Lot No. 4, North, passing an iron pin set at 1332.24 ft., going a total distance of 1352.27 ft. to the place of beginning, containing 15.000 acres and being subject to the right-of-way of Twp. Rd. No. 351 and all valid easements.

Cited bearings are based on the west line of Frac. Lot No. 4 as running due North and South.

All iron pins described as being set are ½" x 30" with an attached identification cap.

The above description is the result of an actual survey made by Michael P. Berry, Ohio Registered Surveyor Number 6803, on April 16, 1984.

Approved - Mathematically
Hocking County Engineer's office.
By [Signature] Date 4-23-84

[Signature]
Michael P. Berry #6803



GREEN 10+22

PLAT OF A 5.0000 ACRE TRACT FOR THE BOY SCOUT PROPERTY

TOTAL 5.00 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

Center of Township Road 350, Scout Road

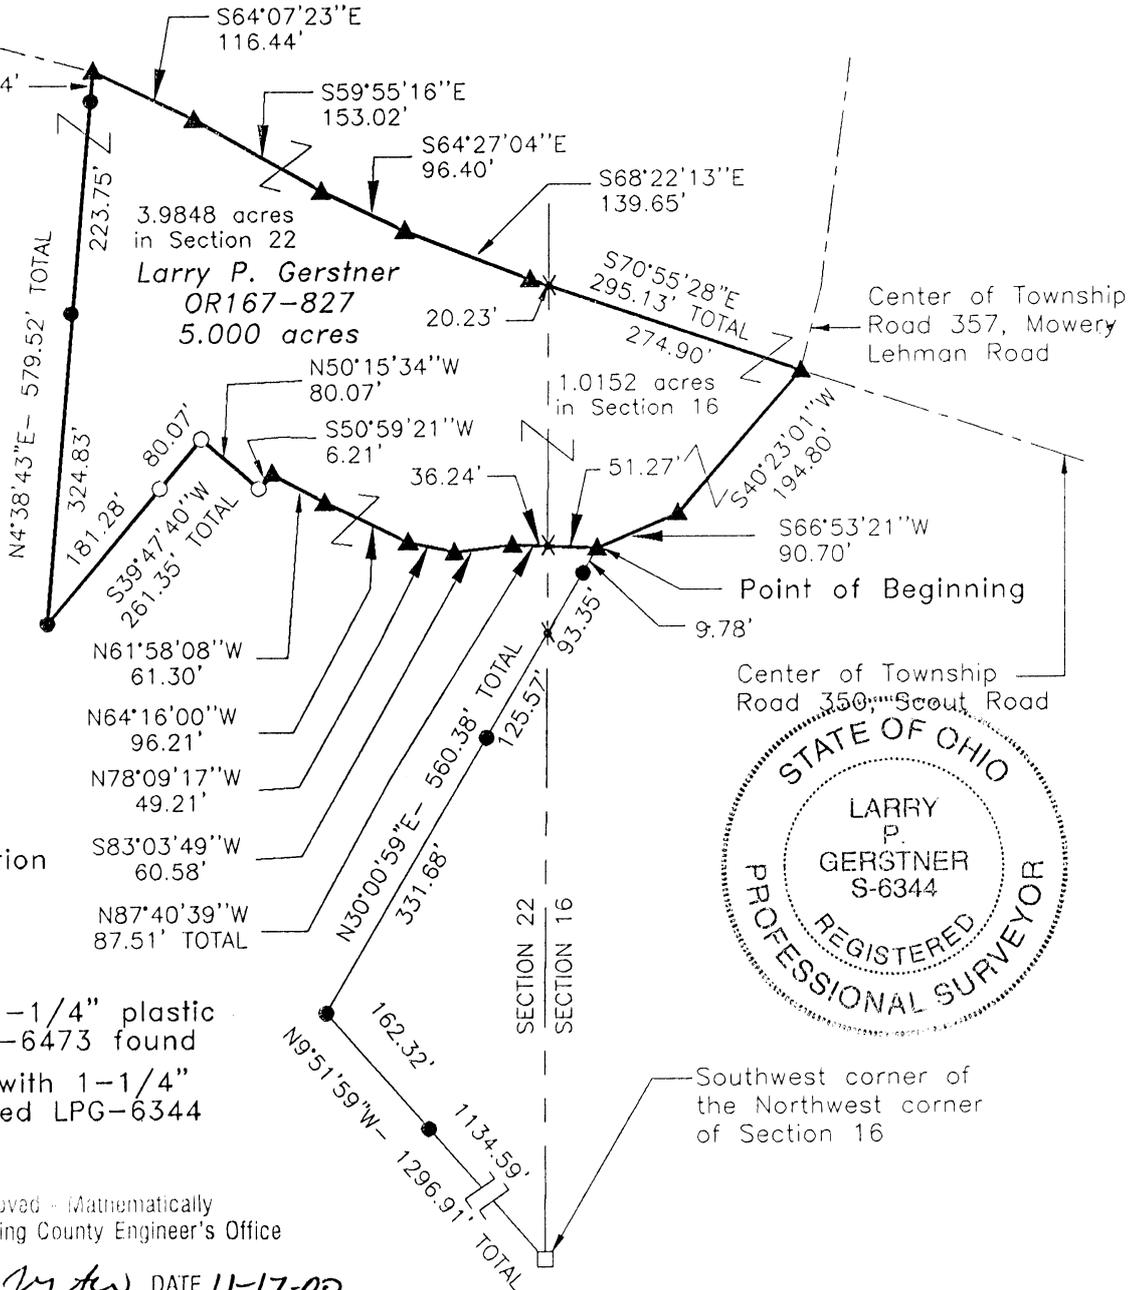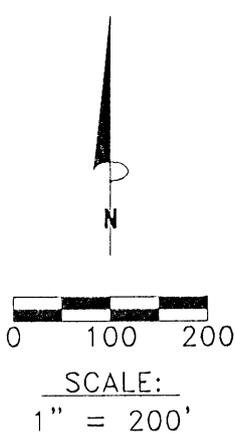

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW-6473 found
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found
- X Point

Approved - Mathematically
Hocking County Engineer's Office

Jy kw DATE 11-17-00

REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0000 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 30 degrees 00 minutes 59 seconds East a distance of 560.38 to a MAG nail set in the center of a private driveway, passing 5/8" iron pins set at distances of 331.68 feet and 550.60, passing into Section 16 at a distance of 457.25 feet, and being the point of **Beginning** of the tract of land to be described;

thence with a private driveway the following five bearings and distances:

1) North 87 degrees 40 minutes 39 second West a distance of 87.51 feet to a MAG nail set and passing back into Section 22 at a distance of 51.27 feet;

2) South 83 degrees 03 minutes 49 seconds West a distance of 60.58 feet to a MAG nail set;

3) North 78 degrees 09 minutes 17 seconds West a distance of 49.21 feet to a MAG nail set;

4) North 64 degrees 16 minutes 00 seconds West a distance of 96.21 feet to a MAG nail set;

5) North 61 degrees 58 minutes 08 seconds West a distance of 61.30 feet to a MAG nail set;

thence leaving a private driveway South 50 degrees 59 minutes 21 seconds West a distance of 6.21 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 50 degrees 15 minutes 34 seconds West a distance of 80.07 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence South 39 degrees 47 minutes 40 seconds West a distance of 261.35 feet to a 5/8" iron pin set and passing a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found at a distance of 80.07 feet;

thence North 4 degrees 38 minutes 43 seconds East a distance of 579.52 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 324.83 feet and 548.58 feet;

thence with the center of said Township Road 350 the following five bearings and distances:

1) South 64 degrees 07 minutes 23 seconds East a distance of 116.44 feet to a MAG nail set;

2) South 59 degrees 55 minutes 16 seconds East a distance of 153.02 feet to a MAG nail set;

3) South 64 degrees 27 minutes 04 seconds East a distance of 96.40 feet to a MAG nail set;

4) South 68 degrees 22 minutes 13 seconds East a distance of 139.65 feet to a MAG nail set;

5) South 70 degrees 55 minutes 28 seconds East a distance of 295.13 feet to a MAG nail set at the intersection of Township Road 357, Mowery Lehman Road, and a private driveway and passing back into Section 16 at a distance of 20.23 feet;

thence leaving the center of said Township Road 350 and with a private driveway the following two bearings and distances;

1) South 40 degrees 23 minutes 01 second West a distance of 194.80 feet to a MAG nail set;

2) South 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to the point of beginning, containing 5.0000 acres more or less with 3.9848 acres more or less being in Section 22 and 1.0152 acres more or less being in Section 16, and subject to the public easements of said Township Roads 350 and 357 and any other public or private easements of record.

The above 5.0000 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.



Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 11-17-00

[Signature]

Survey by:



Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16-17

PLAT OF A 7.558 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

7.558 Ac

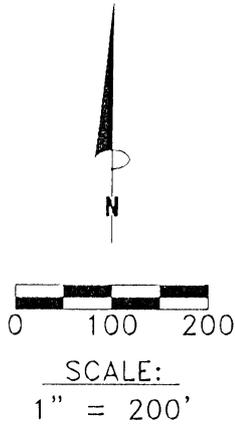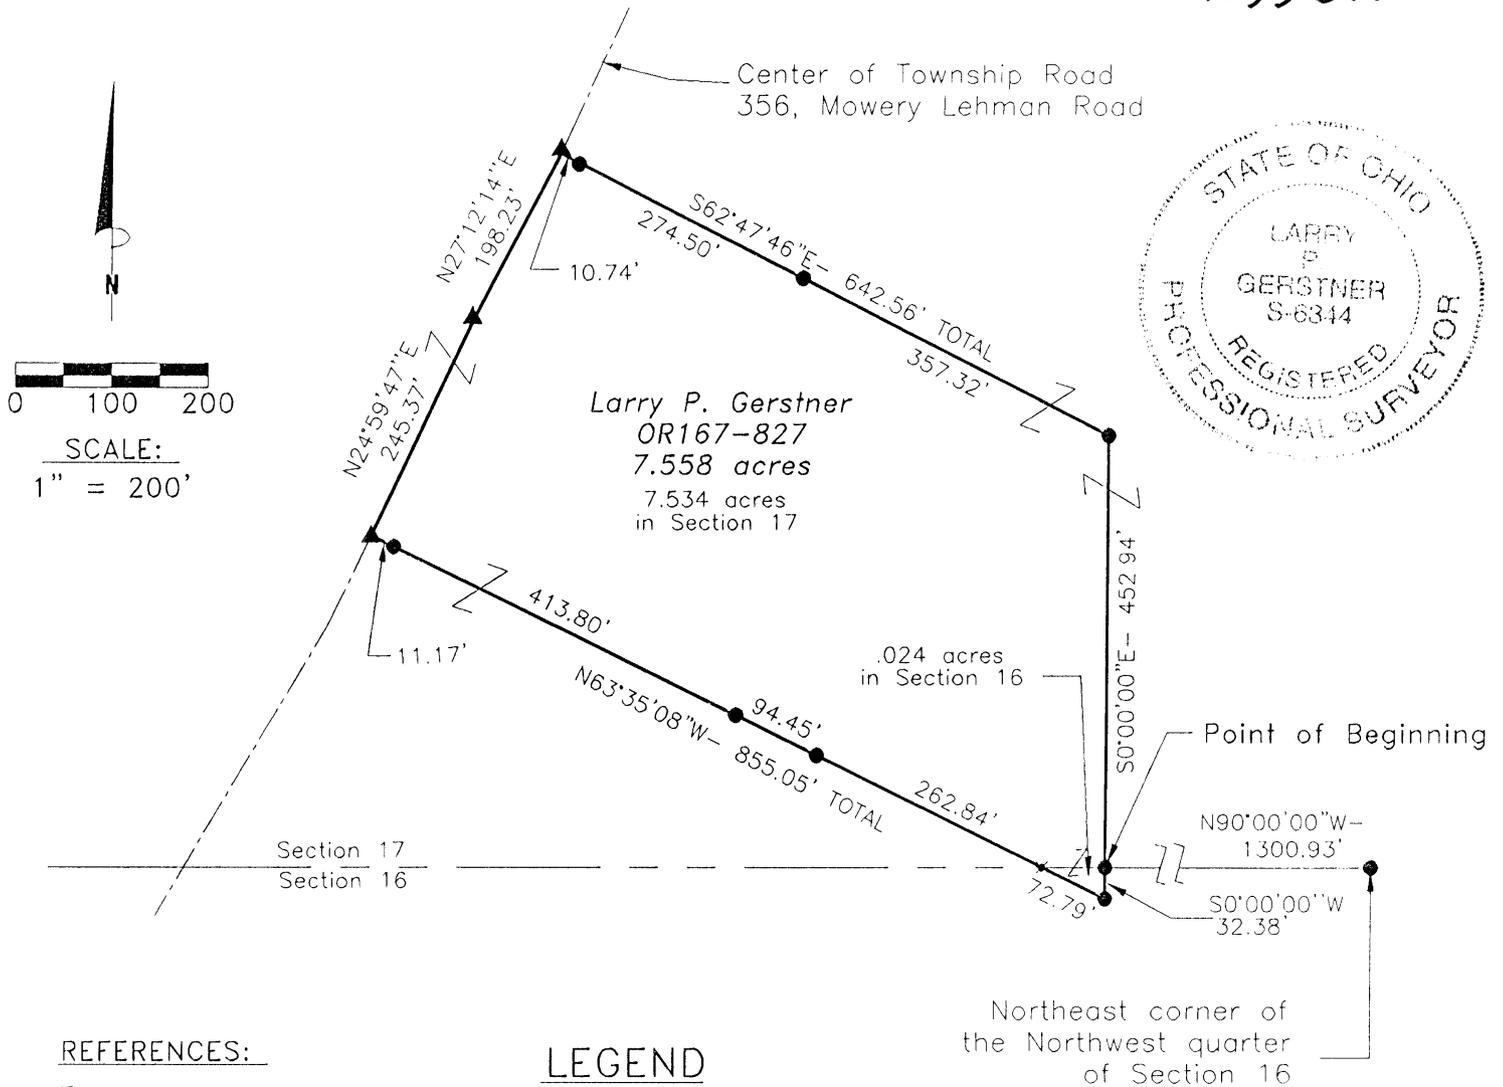

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- ✱ Point

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

11-22-00

SURVEY DESCRIPTION OF A 7.558 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence with the North line of Section 16 North 90 degrees 00 minutes 00 seconds West a distance of 1300.93 feet to a 5/8" iron pin set, and being the point of **Beginning** of the tract of land to be described;

thence leaving the North line of Section 16 South 0 degrees 00 minutes 00 seconds West a distance of 32.38 feet to a 5/8" iron pin set;

thence North 63 degrees 35 minutes 08 seconds West a distance of 855.05 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, passing into Section 17 at a distance of 72.79 feet and passing 5/8" iron pins set at distances of 335.63 feet, 430.08 feet, and 843.88 feet;

thence with the center of said Township Road 356 the following two bearings and distances:

1) North 24 degrees 59 minutes 47 seconds East a distance of 245.37 feet to a MAG nail set;

2) North 27 degrees 12 minutes 14 seconds East a distance of 198.23 feet to a MAG nail set;

thence leaving the center of said Township Road 356 South 62 degrees 47 minutes 46 seconds East a distance of 642.56 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 10.74 feet and 285.24 feet;

thence South 0 degrees 00 minutes 00 seconds West a distance of 452.94 feet to the point of beginning, containing 7.558 acres more or less with 7.534 acres more or less being in Section 17 and .024 acres more or less being in Section 16, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 7.558 acre survey is intended to describe part of the 168 acre Tract Four and part of the 82.5 acre Tract Six, as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on October 31, 2000.



Approved - Mathematically
Hocking County Engineer's Office

L.P.G. DATE 11-22-00

Larry P. Gerstner

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16+22


PLAT OF A 5.0006 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0006 AC.

Situated in Green Township, Hocking County, Ohio; being part of the Northeast quarter of Section 22, and part of the Northwest quarter of Section 16, both of Township 13, Range 16.


LEGEND

- ✕ Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

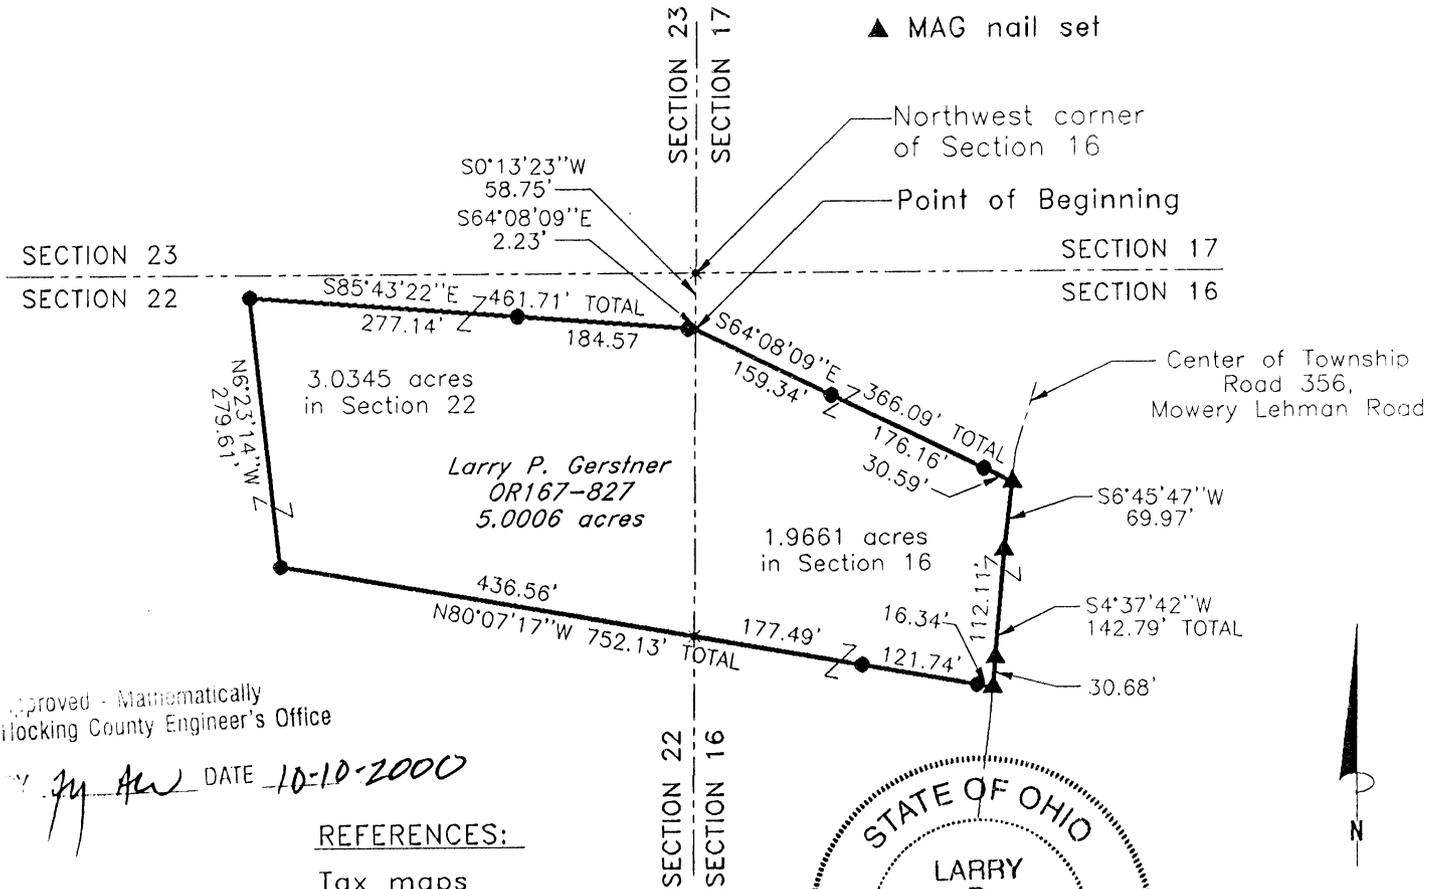

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

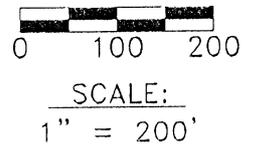

REFERENCE BEARING:

North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of September, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0006 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northeast quarter of Section 22, and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a point at Northwest corner of Section 16; thence with the West line of Section 16 South 0 degrees 13 minutes 23 seconds West a distance of 58.75 feet to a point and being the point of **Beginning** of the tract of land to be described;

thence South 64 degrees 08 minutes 09 seconds East a distance of 366.09 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing 5/8" iron pins set at distances of 159.34 feet and 335.50 feet;

thence with the center of said Township Road 356 the following two bearings and distances:

1) South 6 degrees 45 minutes 47 seconds West a distance of 69.97 feet to a MAG nail set;
2) South 4 degrees 37 minutes 42 seconds West a distance of 142.79 feet to a MAG nail set and passing a MAG nail set at a distance of 112.11 feet;

thence leaving the center of said Township Road 356 North 80 degrees 07 minutes 17 seconds West a distance of 752.13 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 16.34 feet and 138.08 feet and passing into Section 22 at a distance of 315.57 feet;

thence North 6 degrees 23 minutes 14 seconds West a distance of 279.61 feet to a 5/8" iron pin set;

thence South 85 degrees 43 minutes 22 seconds East a distance of 461.71 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 277.14 feet;

thence South 64 degrees 08 minutes 09 seconds East a distance of 2.23 feet to the point of beginning containing 5.0006 acres more or less, with 1.9661 acres more or less being in Section 16 and 3.0345 acres more or less being in Section 22, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 5.0006 acre survey is intended to describe part of the 168 acre Tract Four and part of the 165 acre Tract Seven, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on September 18, 2000.



Approved - Mathematically
Hocking County Engineer's Office

DATE 10-10-2000

A handwritten signature of Larry P. Gerstner in black ink, written over a horizontal line.

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

SURVEY DESCRIPTION OF A 50.000 ACRE TRACT FOR ROBERT AND CAROL FREY

Situated in Green Township, Hocking County, Ohio; being part of the Southeast quarter of the Southeast quarter and the Southwest quarter of the Southeast quarter, both of Section 23, part of the Northeast quarter of Section 22, part of the South half of the Southwest quarter of Section 17, and part of the Northwest quarter of Section 16, all of Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of the Southeast quarter of the Southeast quarter of Section 23; thence with the East line of Section 23 South 0 degrees 13 minutes 23 seconds West a distance of 612.93 feet to a 5/8" iron pin set;

thence going into Section 17 South 85 degrees 53 minutes 12 seconds East a distance of 199.82 feet to a 5/8" iron pin set;

thence North 86 degrees 30 minutes 31 seconds East a distance of 609.62 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing 5/8" iron pins set at distances of 335.61 feet and 577.89 feet;

thence with the center of said Township Road 356 the following seven bearings and distances:

1) South 24 degrees 04 minutes 53 seconds West a distance of 22.09 feet to a MAG nail set;
2) South 27 degrees 12 minutes 14 seconds West a distance of 198.23 feet to a MAG nail set;
3) South 24 degrees 59 minutes 47 seconds West a distance of 351.40 feet to a MAG nail set;
4) South 30 degrees 06 minutes 27 seconds West a distance of 350.20 feet to a MAG nail set and passing into Section 16 at a distance of 291.19 feet;

5) South 26 degrees 39 minutes 46 seconds West a distance of 72.68 feet to a MAG nail set;

6) South 17 degrees 05 minutes 24 seconds West a distance of 71.75 feet to a MAG nail set;

7) South 6 degrees 45 minutes 47 seconds West a distance of 34.11 feet to a MAG nail set;

thence leaving the center of said Township Road 356 North 64 degrees 08 minutes 09 seconds West a distance of 368.31 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 30.59 feet and 206.74 feet and passing into Section 22 at a distance of 366.09 feet;

thence North 85 degrees 43 minutes 22 seconds West a distance of 461.71 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 184.57 feet;

thence South 88 degrees 17 minutes 34 seconds West a distance of 1130.02 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 483.87 feet;

thence North 20 degrees 22 minutes 25 seconds East a distance of 1131.31 feet to a 5/8" iron pin set, passing into Section 23 at a distance of 60.81 feet, and passing a 5/8" iron pin set at a distance of 649.82 feet;

thence North 73 degrees 38 minutes 03 seconds East a distance of 1254.43 feet to the point of beginning, containing 50.000 acres more or less, with 10.499 acres more or less being in Section 17, 1.219 acres more or less being in Section 16, 1.460 acres more or less being in Section 22, and 36.822 acres more or less being in Section 23, and subject to the public easement of said Township Road 356 and any other public or private easements of record.

The above 50.000 acre survey is intended to describe part of the 168 acre Tract Four, part of the 82.5 acre Tract Six, part of the 165 acre Tract Seven, part of the 40 acre Tract Nine, and part of the 40 acre Tract Thirteen all as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, as completed on September 18, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY JH DATE 9-27-00

 Larry P. Gerstner


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

Green
 Sec. 10, 22
 5.00 Ac.

PLAT OF A 5.0000 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

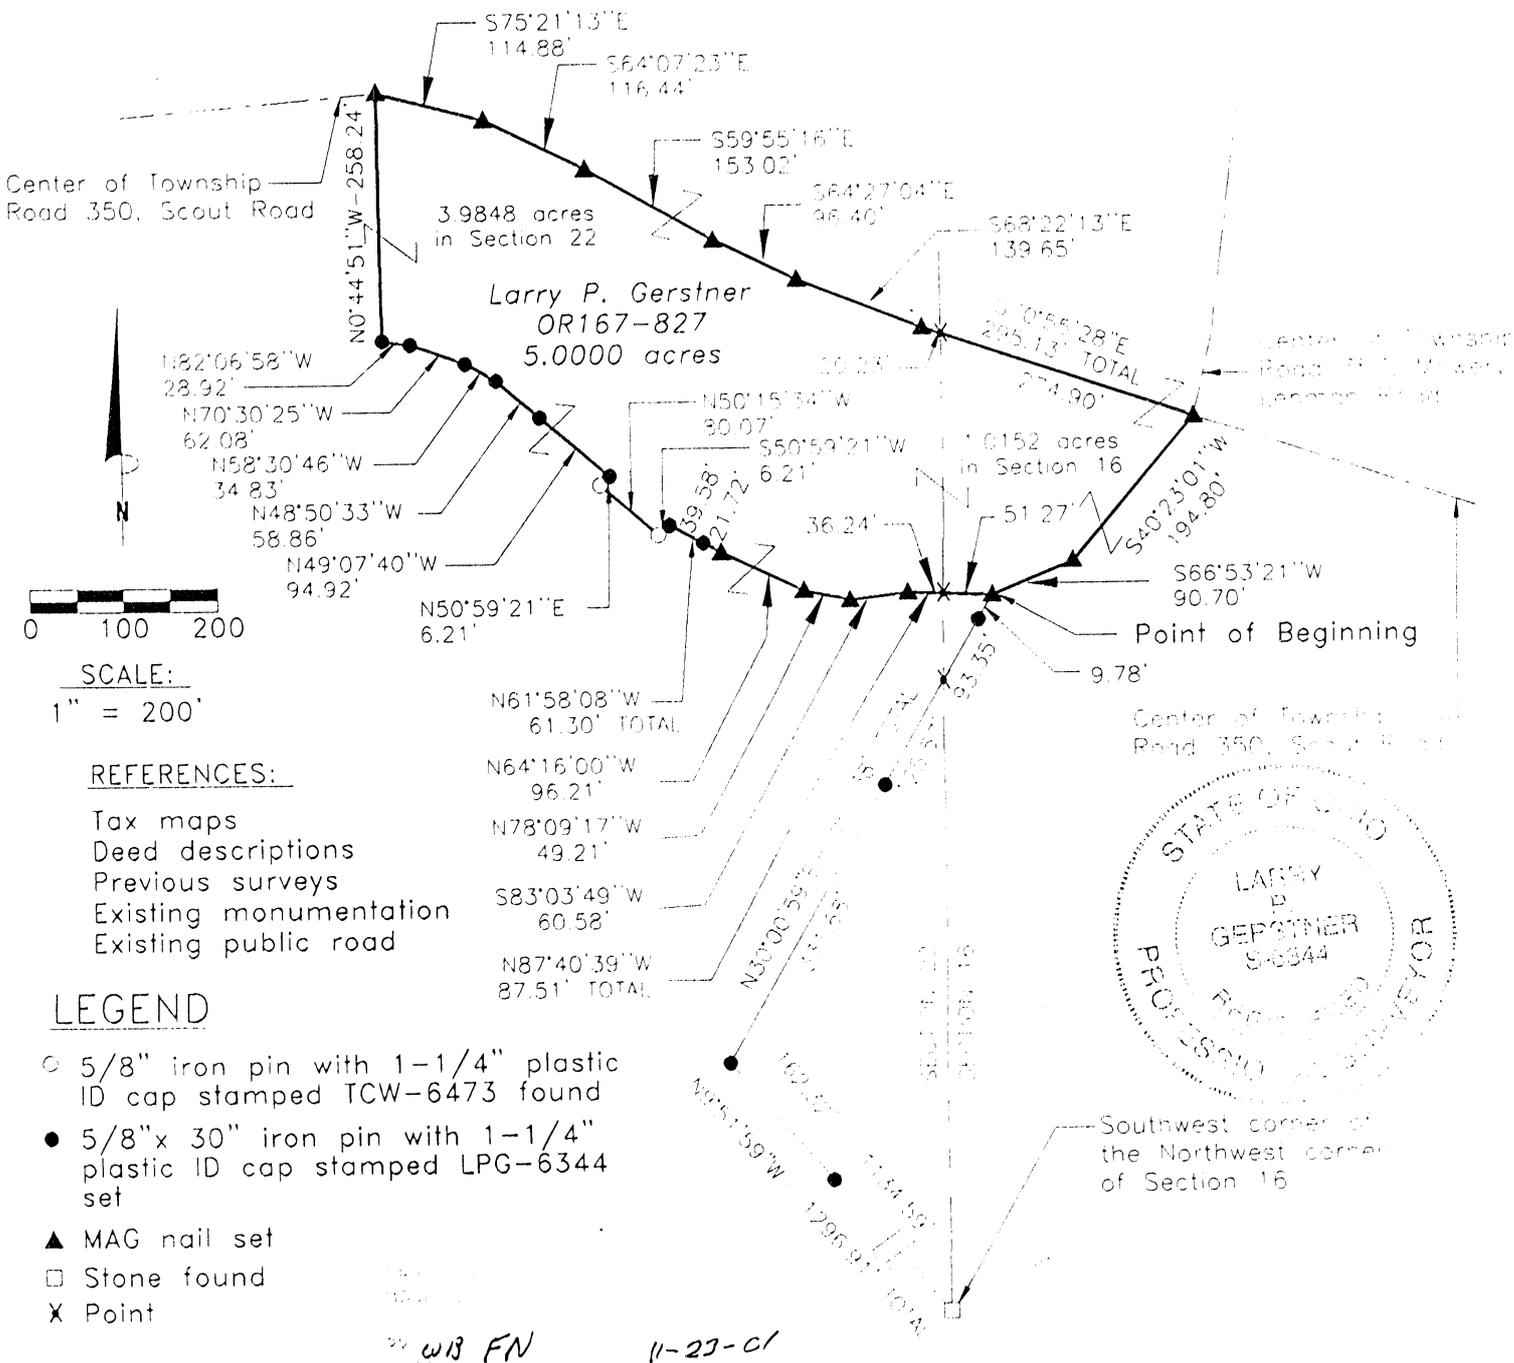

SCALE:
 1" = 200'

- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road

LEGEND

- 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW-6473 found
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found
- X Point



WB FN 11-23-01

REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.0000 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 30 degrees 00 minutes 59 seconds East a distance of 560.38 to a MAG nail set in the center of a private driveway, passing 5/8" iron pins set at distances of 331.68 feet and 550.60 feet, passing into Section 16 at a distance of 457.25 feet, and being the point of **Beginning** of the tract of land to be described;

thence with a private driveway the following five bearings and distances:

- 1) North 87 degrees 40 minutes 39 second West a distance of 87.51 feet to a MAG nail set and passing back into Section 22 at a distance of 51.27 feet;
- 2) South 83 degrees 03 minutes 49 seconds West a distance of 60.58 feet to a MAG nail set;
- 3) North 78 degrees 09 minutes 17 seconds West a distance of 49.21 feet to a MAG nail set;
- 4) North 64 degrees 16 minutes 00 seconds West a distance of 96.21 feet to a MAG nail set;
- 5) North 61 degrees 58 minutes 08 seconds West a distance of 61.30 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 21.72 feet;

thence leaving a private driveway South 50 degrees 59 minutes 21 seconds West a distance of 6.21 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 50 degrees 15 minutes 34 seconds West a distance of 80.07 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 50 degrees 59 minutes 21 seconds East a distance of 6.21 feet to a 5/8" iron pin set in the center of a private driveway;

thence with a private driveway the following five bearings and distances:

- 1) North 49 degrees 07 minutes 40 second West a distance of 94.92 feet to a 5/8" iron pin set;
- 2) North 48 degrees 50 minutes 33 seconds West a distance of 58.86 feet to a 5/8" iron pin set;
- 3) North 58 degrees 30 minutes 46 seconds West a distance of 34.83 feet to a 5/8" iron pin set;
- 4) North 70 degrees 30 minutes 25 seconds West a distance of 62.08 feet to a 5/8" iron pin set;
- 5) North 82 degrees 06 minutes 58 seconds West a distance of 28.92 feet to a 5/8" iron pin set;

thence leaving a private driveway North 0 degrees 44 minutes 51 seconds West a distance of 258.24 feet to a MAG nail set in the center of Township Road 350, Scout Road;

thence with the center of said Township Road 350 the following six bearings and distances:

- 1) South 75 degrees 21 minutes 13 seconds East a distance of 114.88 feet to a MAG nail set;
- 2) South 64 degrees 07 minutes 23 seconds East a distance of 116.44 feet to a MAG nail set;
- 3) South 59 degrees 55 minutes 16 seconds East a distance of 153.02 feet to a MAG nail set;
- 4) South 64 degrees 27 minutes 04 seconds East a distance of 96.40 feet to a MAG nail set;
- 5) South 68 degrees 22 minutes 13 seconds East a distance of 139.65 feet to a MAG nail set;
- 6) South 70 degrees 55 minutes 28 seconds East a distance of 295.13 feet to a MAG nail set at the intersection of Township Road 357, Mowery Lehman Road, and a private driveway and passing back into Section 16 at a distance of 20.23 feet;

thence leaving the center of said Township Road 350 and with a private driveway the following two bearings and distances;


- 1) South 40 degrees 23 minutes 01 second West a distance of 194.80 feet to a MAG nail set;
- 2) South 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to the point of beginning, containing 5.0000 acres more or less with 3.9848 acres more or less being in Section 22 and 1.0152 acres more or less being in Section 16, and subject to the public easements of said Township Roads 350 and 357 and any other public or private easements of record.

The above 5.0000 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.

The above 5.0000 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.

WBFM DATE 11-23-01

Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138


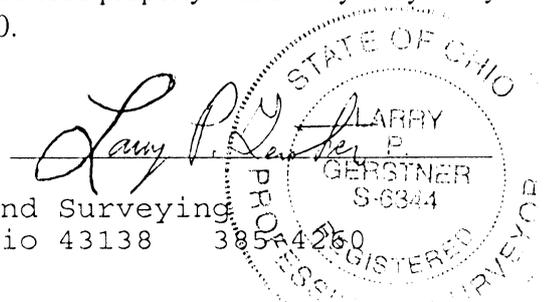


GREEN 16+22

6.114 ac.

PLAT OF A 6.114 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

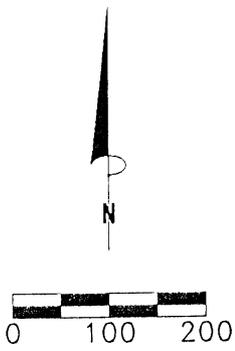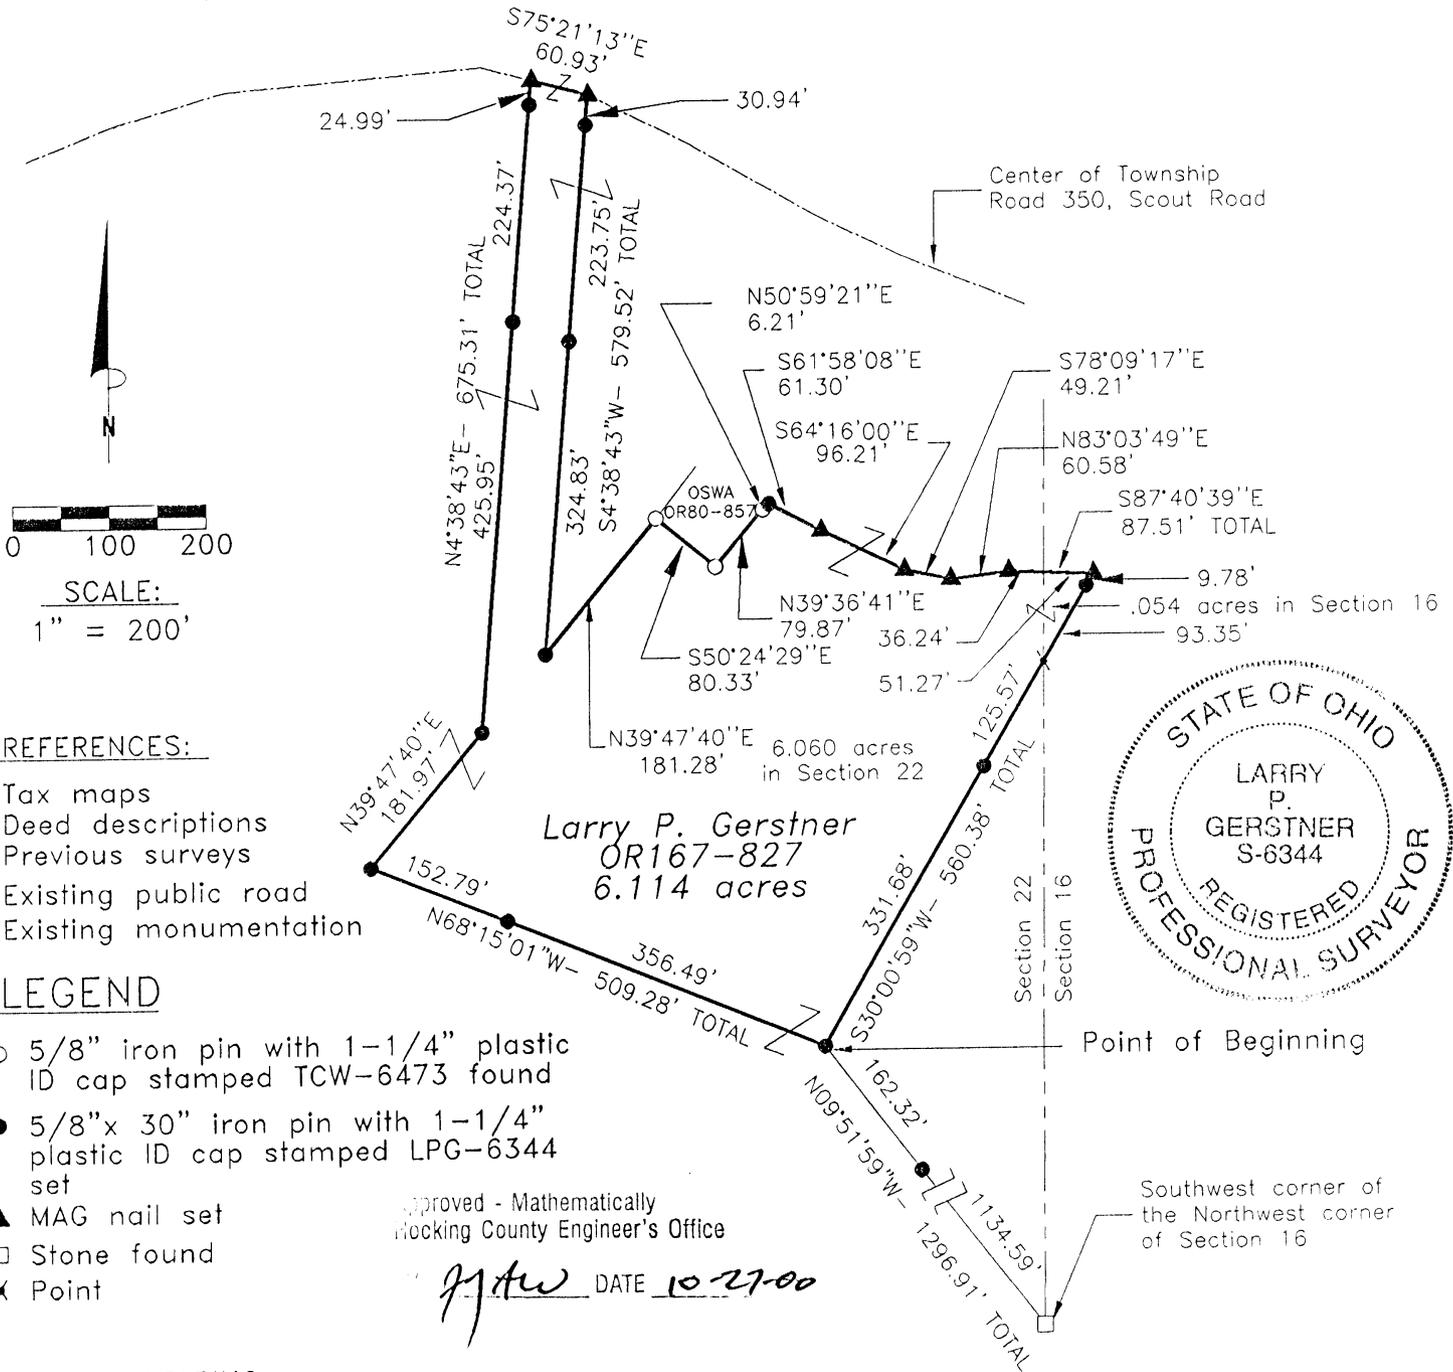

SCALE:
1" = 200'

- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing public road
 - Existing monumentation

LEGEND

- 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW-6473 found
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found
- × Point

Approved - Mathematically
Hocking County Engineer's Office

JAW DATE 10-27-00



REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner

Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 6.114 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 1134.59 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 68 degrees 15 minutes 01 second West a distance of 509.28 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 356.49 feet;

thence North 39 degrees 47 minutes 40 seconds East a distance of 181.97 feet to a 5/8" iron pin set;

thence North 4 degrees 38 minutes 43 seconds East a distance of 675.31 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 425.95 feet and 650.32 feet;

thence with the center of said Township Road 350 South 75 degrees 21 minutes 13 seconds East a distance of 60.93 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 4 degrees 38 minutes 43 seconds West a distance of 579.52 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 30.94 feet and 254.69 feet;

thence North 39 degrees 47 minutes 40 seconds East a distance of 181.28 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence South 50 degrees 24 minutes 29 seconds East a distance of 80.33 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 39 degrees 36 minutes 41 seconds East a distance of 79.87 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 50 degrees 59 minutes 21 seconds East a distance of 6.21 feet to a 5/8" iron pin set in a private driveway;

thence with said private driveway the following five bearings and distances:

1) South 61 degrees 58 minutes 08 seconds East a distance of 61.30 feet to a MAG nail set;

2) South 64 degrees 16 minutes 00 seconds East a distance of 96.21 feet to a MAG nail set;

3) South 78 degrees 09 minutes 17 seconds East a distance of 49.21 feet to a MAG nail set;

4) North 83 degrees 03 minutes 49 seconds East a distance of 60.58 feet to a MAG nail set;

5) South 87 degrees 40 minutes 39 seconds East a distance of 87.51 feet to a MAG nail set and passing into Section 16 at a distance of 36.24 feet;

thence leaving said private driveway South 30 degrees 00 minutes 59 seconds West a distance of 560.38 feet to the point of beginning, passing 5/8" iron pins set at distances of 9.78 feet and 228.70 feet, passing back into Section 22 at a distance of 103.13 feet, containing 6.114 acres more or less with 6.060 acres more or less being in Section 22 and .054 acres more or less being in Section 16, and subject to the public easements of said Township Road 350 and any other public or private easements of record.

The above 6.114 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.



Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 10-27-00

[Signature]


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16 + 2.2

CENTERLINE PLAT OF A 1125.34 FEET LONG BY 30 FEET WIDE EASEMENT
EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

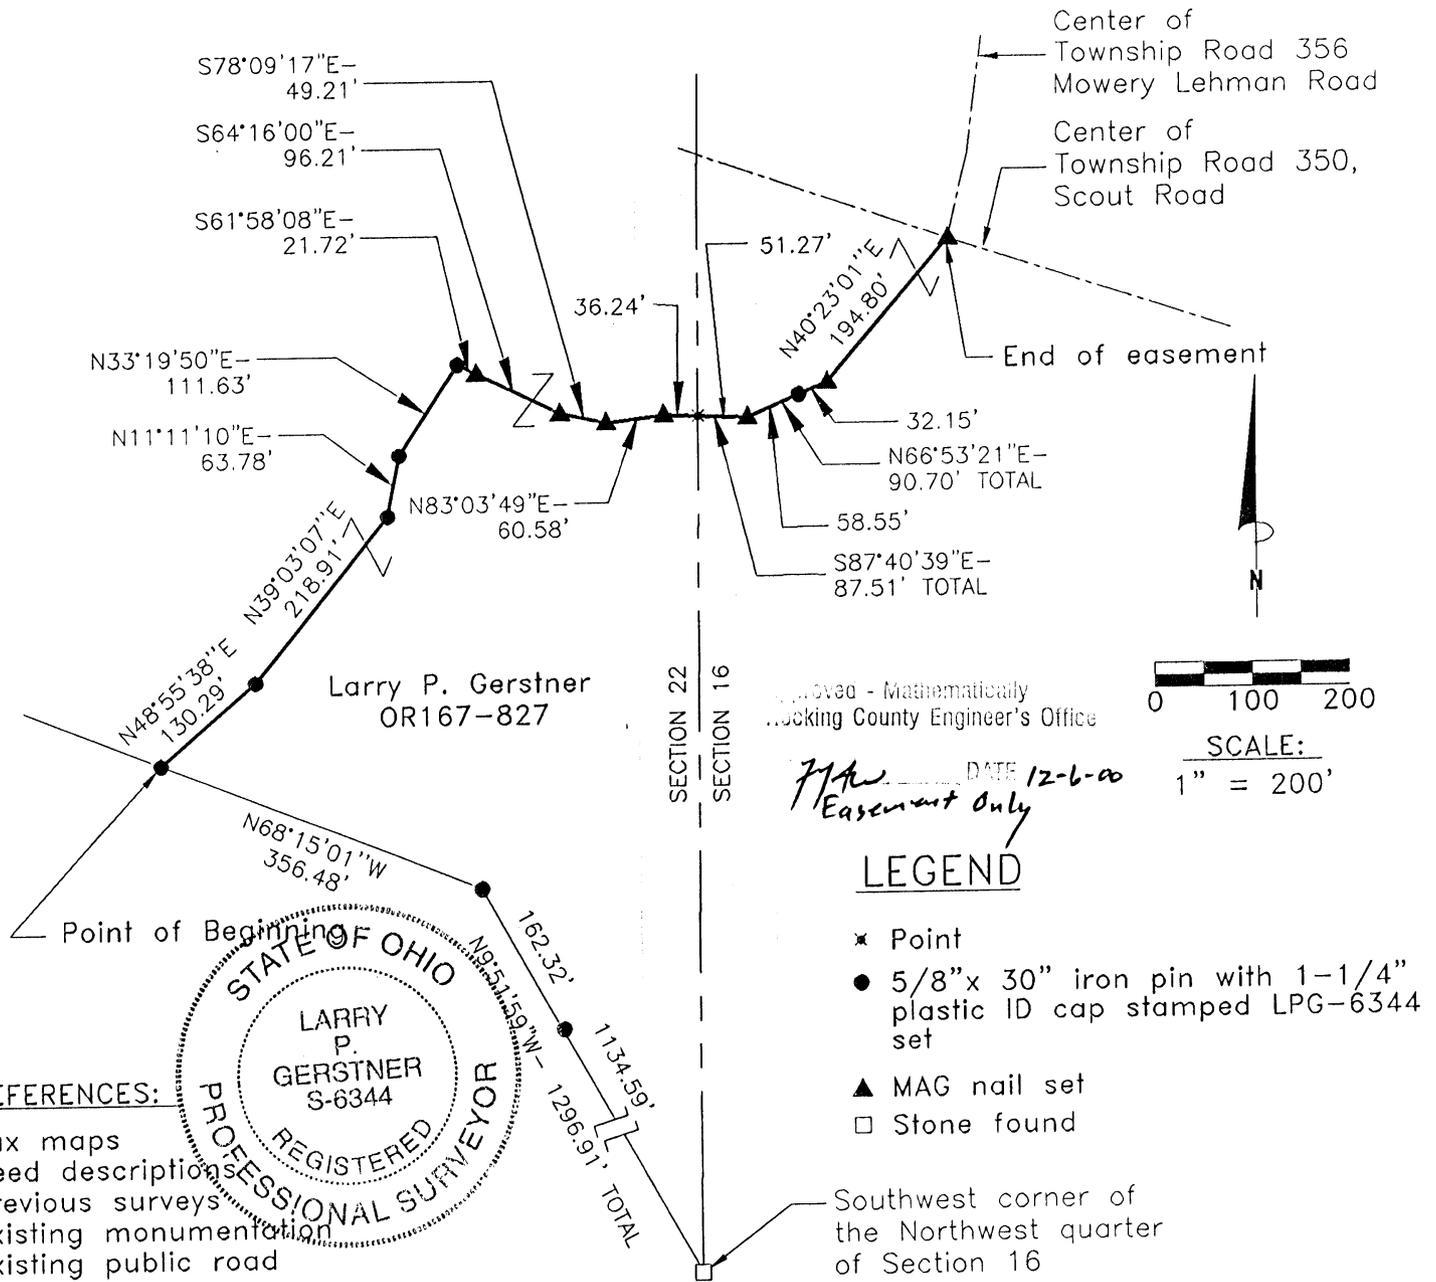

- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road



REFERENCE BEARING:
West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:
I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

CENTERLINE SURVEY DESCRIPTION OF A 1125.34 FEET LONG BY 30 FEET WIDE

EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; being a 1125.34 feet long by 30 feet wide centerline easement of ingress and egress; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest quarter of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 68 degrees 15 minutes 01 second West a distance of 356.48 feet to a 5/8" iron pin set and being the point of **Beginning** of the centerline easement of ingress and egress to be described;

thence North 48 degrees 55 minutes 38 seconds East a distance of 130.29 feet to a 5/8" iron pin set;
thence North 39 degrees 03 minutes 07 seconds East a distance of 218.91 feet to a 5/8" iron pin set;
thence North 11 degrees 11 minutes 10 seconds East a distance of 63.78 feet to a 5/8" iron pin set;
thence North 33 degrees 19 minutes 50 seconds East a distance of 111.63 feet to a 5/8" iron pin set;
thence South 61 degrees 58 minutes 08 seconds East a distance of 21.72 feet to a MAG nail set;
thence South 64 degrees 16 minutes 00 seconds East a distance of 96.21 feet to a MAG nail set;
thence South 78 degrees 09 minutes 17 seconds East a distance of 49.21 feet to a MAG nail set;
thence North 83 degrees 03 minutes 49 seconds East a distance of 60.58 feet to a MAG nail set;
thence South 87 degrees 40 minutes 39 seconds East a distance of 87.51 feet to a MAG nail set and passing into Section 16 at a distance of 36.24 feet;

thence North 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 58.55 feet;

thence North 40 degrees 23 minutes 01 second East a distance of 194.80 feet to a MAG nail set in the intersection of Township Road 350, Scout Road, and Township Road 356, Mowery Lehman Road, being the end of a 1125.34 feet long by 30 feet wide easement of ingress and egress, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.

The above centerline easement of ingress and egress survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.



Reviewed - Mathematically
Hocking County Engineer's Office

LPG DATE 12-6-00
Easement only

Larry P. Gerstner


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

Green
Sec. 16, 22
11.957 Ac.

PLAT OF A 11.957 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

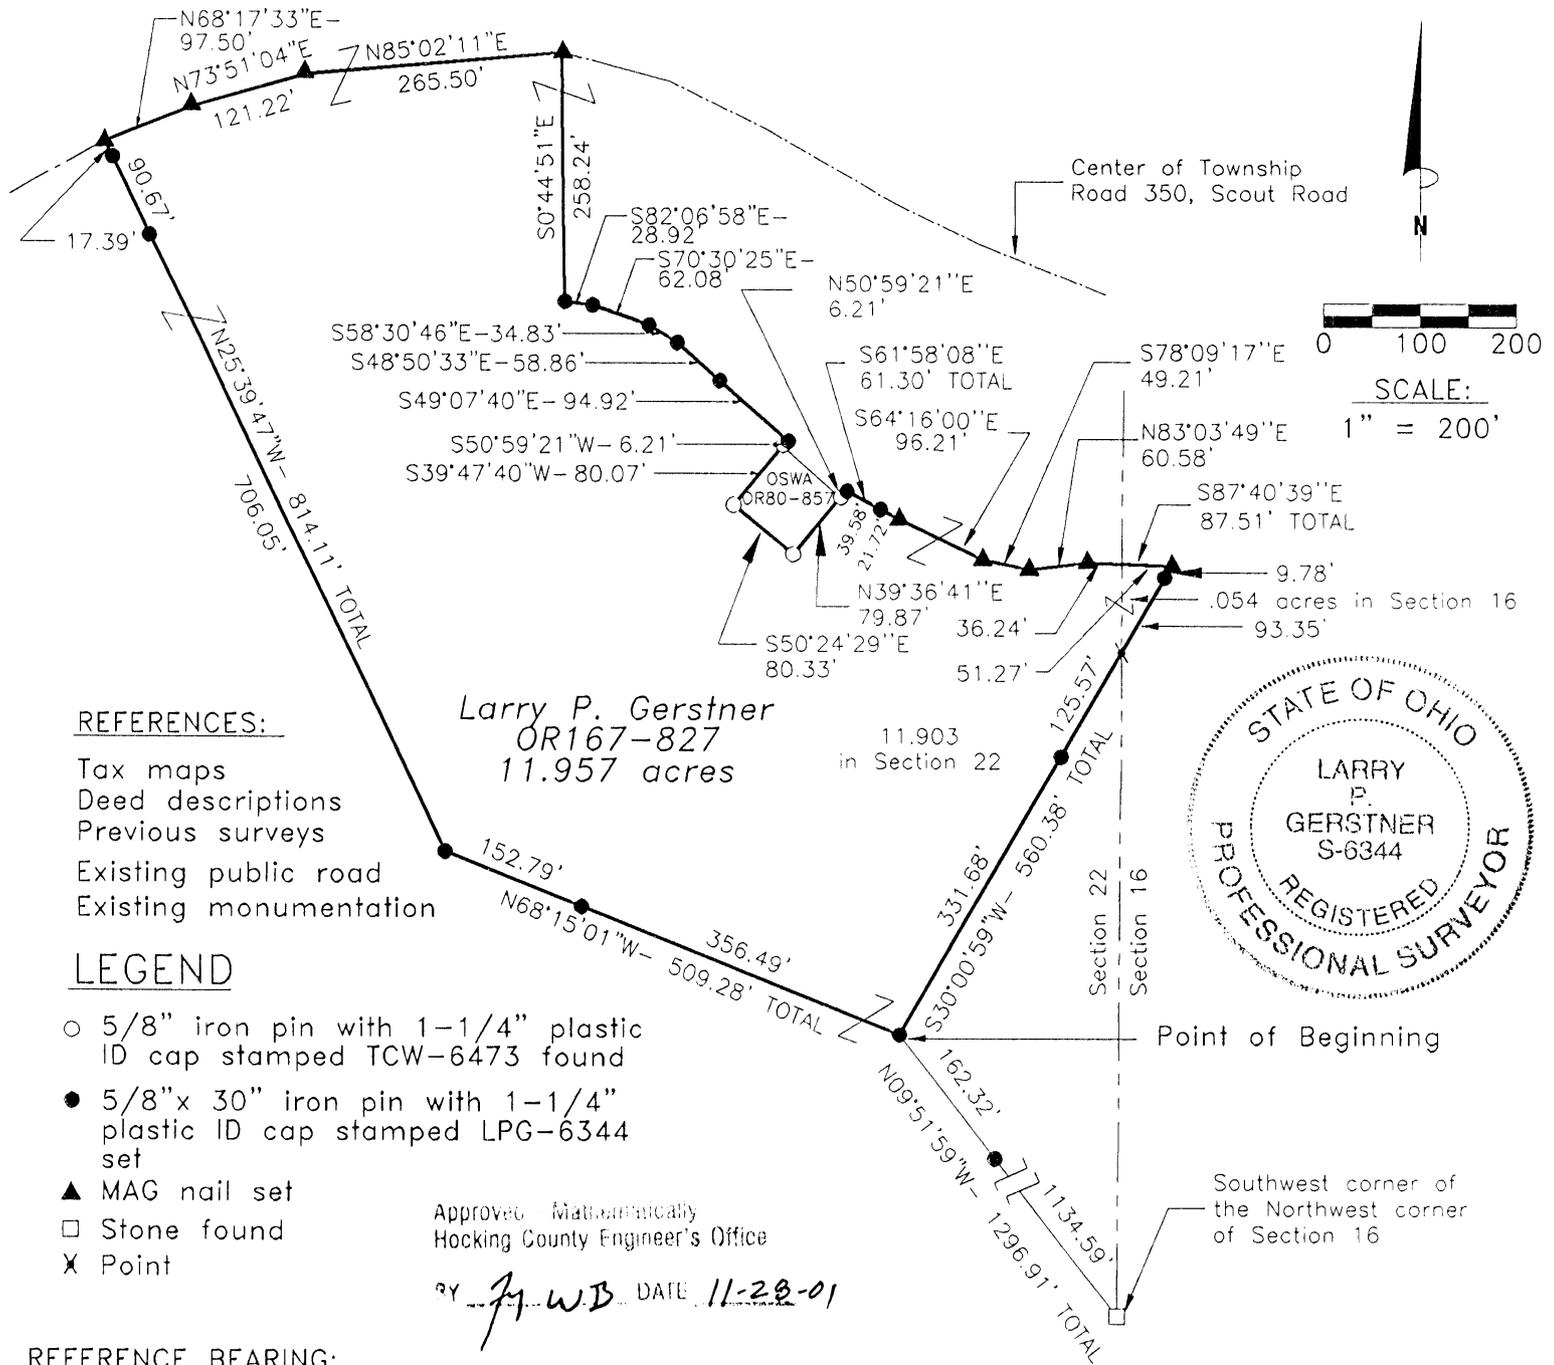

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing public road
- Existing monumentation

LEGEND

- 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW-6473 found
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found
- ✕ Point

Larry P. Gerstner
OR167-827
11.957 acres

11.903
in Section 22



Approved Mathematically
Hocking County Engineer's Office

BY *J. W. B.* DATE 11-28-01

REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 11.957 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 1134.59 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 68 degrees 15 minutes 01 second West a distance of 509.28 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 356.49 feet;

thence North 25 degrees 39 minutes 47 seconds West a distance of 814.11 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 706.05 feet and 796.72 feet;

thence with the center of said Township Road 350 the following three bearings and distances:

- 1) North 68 degrees 17 minutes 33 seconds East a distance of 97.50 feet to a MAG nail set;
- 2) North 73 degrees 51 minutes 04 seconds East a distance of 121.22 feet to a MAG nail set;
- 3) North 85 degrees 02 minutes 11 seconds East a distance of 265.50 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 0 degrees 44 minutes 51 seconds East a distance of 258.24 feet to a 5/8" iron pin set in the center of a private driveway;

thence with a private driveway the following five bearings and distances:

- 1) South 82 degrees 06 minutes 58 seconds East a distance of 28.92 feet to a 5/8" iron pin set;
- 2) South 70 degrees 30 minutes 25 seconds East a distance of 62.08 feet to a 5/8" iron pin set;
- 3) South 58 degrees 30 minutes 46 seconds East a distance of 34.83 feet to a 5/8" iron pin set;
- 4) South 48 degrees 50 minutes 33 seconds East a distance of 58.86 feet to a 5/8" iron pin set;
- 5) South 49 degrees 07 minutes 40 seconds East a distance of 94.92 feet to a 5/8" iron pin set;

thence leaving said private roadway South 50 degrees 59 minutes 21 seconds West a distance of 6.21 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence South 39 degrees 47 minutes 40 seconds West a distance of 80.07 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence South 50 degrees 24 minutes 29 seconds East a distance of 80.33 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 39 degrees 36 minutes 41 seconds East a distance of 79.87 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped TCW 6473 found;

thence North 50 degrees 59 minutes 21 seconds East a distance of 6.21 feet to a 5/8" iron pin set in a private driveway;

thence with said private driveway the following five bearings and distances:

- 1) South 61 degrees 58 minutes 08 seconds East a distance of 61.30 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 39.58 feet;
- 2) South 64 degrees 16 minutes 00 seconds East a distance of 96.21 feet to a MAG nail set;
- 3) South 78 degrees 09 minutes 17 seconds East a distance of 49.21 feet to a MAG nail set;
- 4) North 83 degrees 03 minutes 49 seconds East a distance of 60.58 feet to a MAG nail set;
- 5) South 87 degrees 40 minutes 39 seconds East a distance of 87.51 feet to a MAG nail set and passing into Section 16 at a distance of 36.24 feet;

thence leaving said private driveway South 30 degrees 00 minutes 59 seconds West a distance of 560.38 feet to the point of beginning, passing 5/8" iron pins set at distances of 9.78 feet and 228.70 feet, passing back into Section 22 at a distance of 103.13 feet, containing 11.957 acres more or less with 11.903 acres more or less being in Section 22 and .054 acres more or less being in Section 16, and subject to the public easements of said Township Road 350 and any other public or private easements of record.


The above 11.957 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY JWB DATE 12-2-01

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138

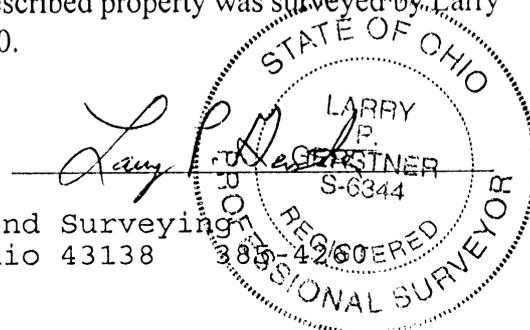

PLAT OF A 15.0036 ACRE TRACT FOR BARBARA AND KEVIN JONES

Green
Sec. 16
15.0036 Ac

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

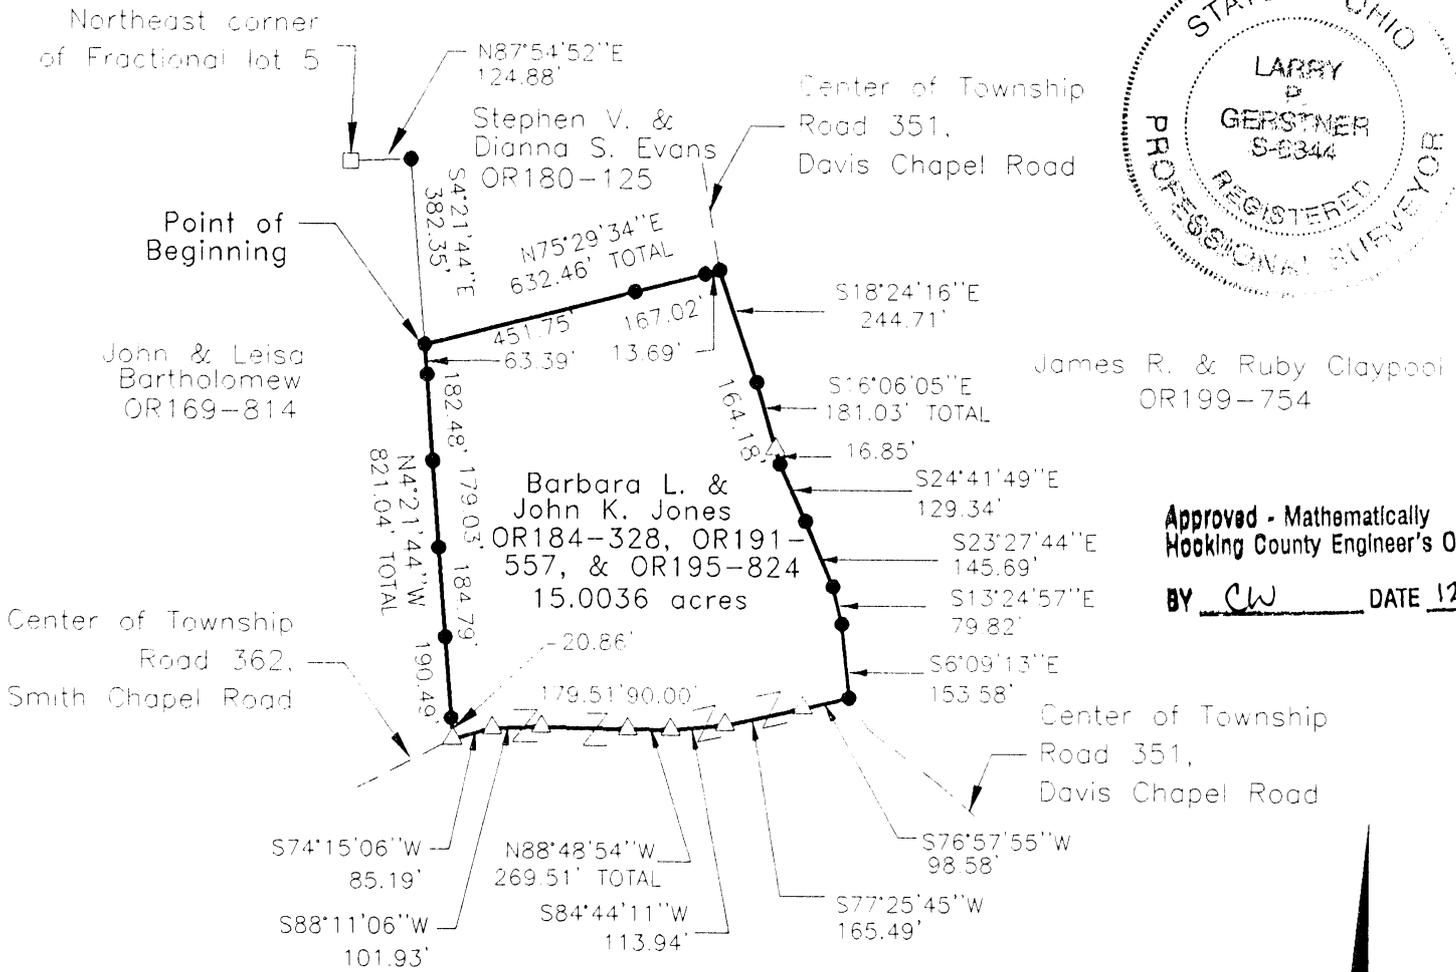

Approved - Mathematically
 Hocking County Engineer's Office

BY CW DATE 12-27-02

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found



SCALE:
 1" = 400'

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon up to and including the 16th day of March, 2001 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 15.0036 ACRE TRACT FOR BARBARA AND KEVIN JONES

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of said Fractional Lot 5; thence North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set; thence South 4 degrees 21 minutes 44 seconds East a distance of 382.35 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 75 degrees 29 minutes 34 seconds East a distance of 632.46 feet to a 5/8" iron pin set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 451.75 feet, and 618.77 feet;

thence with the center of said Township Road 351 the following six bearings and distances:

- 1) South 18 degrees 24 minutes 16 seconds East a distance of 244.71 feet to a 5/8" iron pin set;
- 2) South 16 degrees 06 minutes 05 seconds East a distance of 181.03 feet to a 5/8" iron pin set and passing a MAG nail set at a distance of 164.18 feet;
- 3) South 24 degrees 41 minutes 49 seconds East a distance of 129.34 feet to a 5/8" iron pin set;
- 4) South 23 degrees 27 minutes 44 seconds East a distance of 145.69 feet to a 5/8" iron pin set;
- 5) South 13 degrees 24 minutes 57 seconds East a distance of 79.82 feet to a 5/8" iron pin set;
- 6) South 6 degrees 09 minutes 13 seconds East a distance of 153.58 feet to a 5/8" iron pin set at the intersection of Township Road 362, Smith Chapel Road;

thence leaving the center of said Township Road 351 and with the center of said Township Road 362 the following six bearings and distances:

- 1) South 76 degrees 57 minutes 55 seconds West a distance of 98.58 feet to a MAG nail set;
- 2) South 77 degrees 25 minutes 45 seconds West a distance of 165.49 feet to a MAG nail set;
- 3) South 84 degrees 44 minutes 11 seconds West a distance of 113.94 feet to a MAG nail set;
- 4) North 88 degrees 48 minutes 54 seconds West a distance of 269.51 feet to a MAG nail set and passing a MAG nail set at a distance of 90.00 feet;
- 5) South 88 degrees 11 minutes 06 seconds West a distance of 101.93 feet to a MAG nail set;
- 6) South 74 degrees 15 minutes 06 seconds West a distance of 85.19 feet to a MAG nail set;

thence leaving the center of said Township Road 362 North 4 degrees 21 minutes 44 seconds West a distance of 821.04 feet to the point of beginning, passing 5/8" iron pins set at distances of 20.86 feet, 211.35 feet, 396.14 feet, 575.17 feet, and 757.65 feet, containing 15.0036 acres more or less, and subject to the public easement of said Township Roads 351 and 362 and any other public or private easements of record.

The above 15.0036 acre survey is intended to describe all of the 5.0011, 5.0012, and 5.0013 acre tracts as deeded to Barbara L. and John K. Jones, deed references Volume OR184, Page 328, Volume OR191, Page 557, and Volume OR195, Page 824, all of the Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including March 16, 2001.

Approved - Mathematically
Hocking County Engineer's Office

12-27-02

BY CW DATE Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138

Survey by:




PLAT OF A 69.825 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Green Twp.
Tot. 69.825 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

(32.177 Ac. Sec. 16)
37.648 Ac. Sec. 17

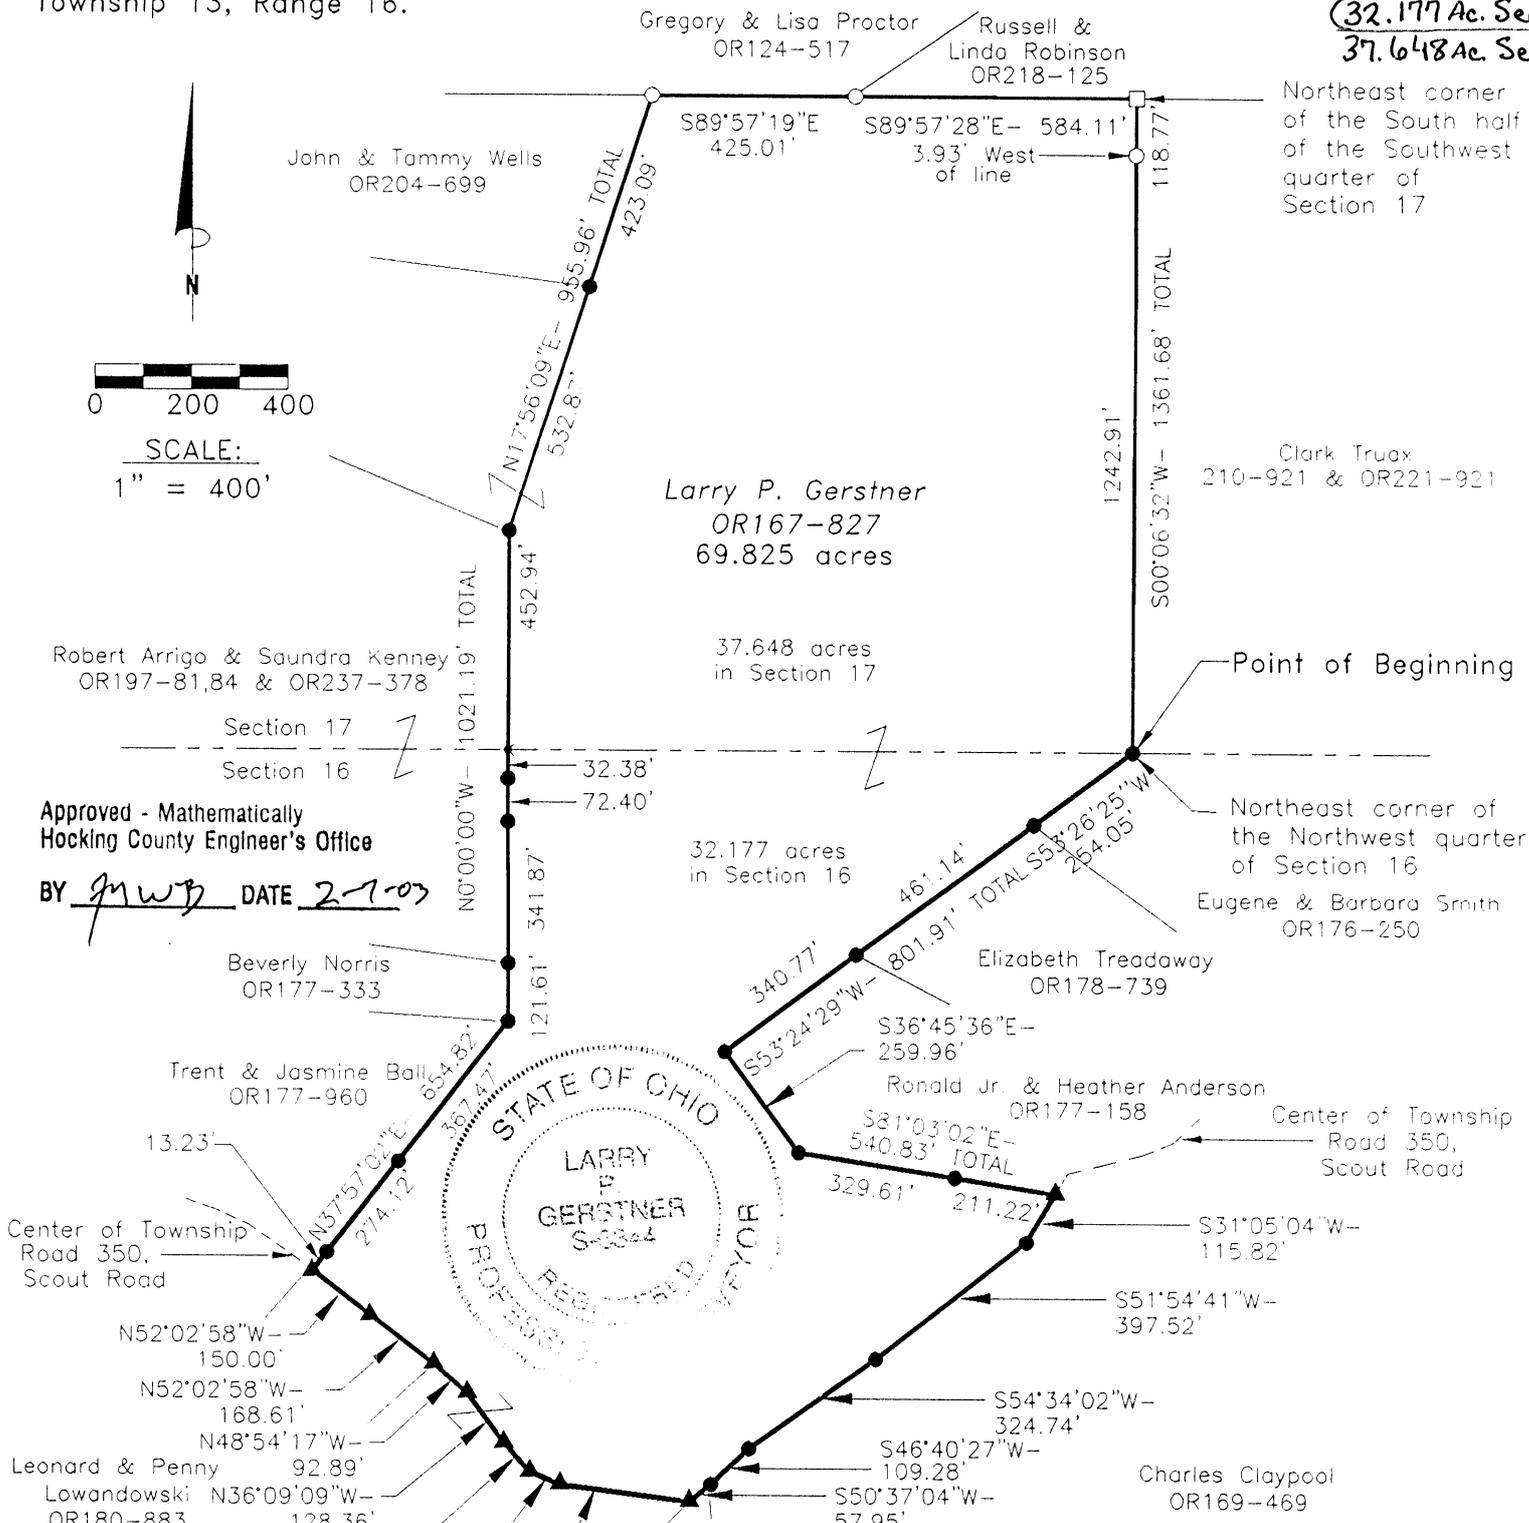

Approved - Mathematically
Hocking County Engineer's Office
BY *JMW* DATE 2-7-03

- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road

REFERENCE BEARING:
North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:
I hereby certify that an actual survey was made under my supervision of the premises shown hereon on 5th day of february, 2003 from actual field work completed the 31st day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

- LEGEND
- Point
 - 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found
 - 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
 - ▲ MAG nail set
 - Stone found

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 69.825 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the South half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Beginning at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence leaving the North line of Section 16 South 53 degrees 26 minutes 25 seconds West a distance of 254.05 feet to a 5/8" iron pin set;

thence South 53 degrees 24 minutes 29 seconds West a distance of 801.91 feet to a 5/8" iron pin set, and passing a 5/8" iron pin set at a distance of 461.14 feet;

thence South 36 degrees 45 minutes 36 seconds East a distance of 259.96 feet to a 5/8" iron pin set;

thence South 81 degrees 03 minutes 02 seconds East a distance of 540.83 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing a 5/8" iron pin set at a distance of 329.61 feet;

thence with the center of said Township Road 350 the following twelve bearings and distances:

1) South 31 degrees 05 minutes 04 seconds West a distance of 115.82 feet to a 5/8" iron pin set;

2) South 51 degrees 54 minutes 41 seconds West a distance of 397.52 feet to a 5/8" iron pin set;

3) South 54 degrees 34 minutes 02 seconds West a distance of 324.74 feet to a 5/8" iron pin set;

4) South 46 degrees 40 minutes 27 seconds West a distance of 109.28 feet to a 5/8" iron pin set at

the end of Township Road 351, Davis Chapel Road;

5) South 50 degrees 37 minutes 04 seconds West a distance of 57.95 feet to a MAG nail set;

6) North 82 degrees 43 minutes 05 seconds West a distance of 272.76 feet to a MAG nail set;

7) North 67 degrees 37 minutes 51 seconds West a distance of 67.79 feet to a MAG nail set;

8) North 41 degrees 36 minutes 42 seconds West a distance of 80.98 feet to a MAG nail set;

9) North 36 degrees 09 minutes 09 seconds west a distance of 128.36 feet to a MAG nail set;

10) North 48 degrees 54 minutes 17 seconds West a distance of 92.89 feet to a MAG nail set;

11) North 52 degrees 02 minutes 58 seconds West a distance of 168.61 feet to a MAG nail set;

12) North 52 degrees 02 minutes 58 seconds West a distance of 150.00 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 37 degrees 57 minutes 02 seconds East a distance of 654.82 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 13.23 feet and 287.35 feet;

thence North 0 degrees 00 minutes 00 seconds East a distance of 1021.19 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 121.61 feet, 463.48 feet, and 535.88 feet, and passing into Section 17 at a distance of 568.26 feet;

thence North 17 degrees 56 minutes 09 seconds East a distance of 955.96 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found and passing a 5/8" iron pin set at a distance of 532.87 feet;


thence South 89 degrees 57 minutes 19 seconds East a distance of 425.01 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found;

thence South 89 degrees 57 minutes 28 seconds East a distance of 584.11 feet to a stone found at the Northeast corner of the South half of the Southwest quarter of Section 17;

thence South 0 degrees 06 minutes 32 seconds West a distance of 1361.68 feet to the point of beginning, passing a 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found 3.93 feet West of the property line at a distance of 118.77 feet, containing 69.825 acres more or less with

in 32.177 acres more or less being in Section 16 and 37.648 acres more or less being in Section ^{16, 17} and ^{17, 18} and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 69.825 acre survey is intended to describe part of the 168 acre Tract Four and part of the 82.5 acre Tract Six, as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed on February 5, 2003 by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, from an actual field survey completed on October 31, 2000.

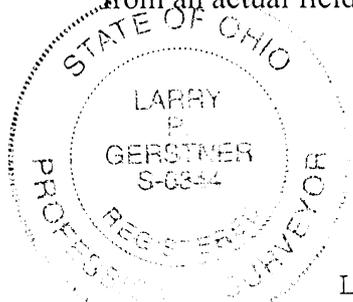

Approved - Mathematically
Hocking County Engineer's Office

BY J. W. B. DATE 2-7-03



Larry P. Gerstner

Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 5.0001 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0001 ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

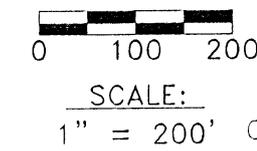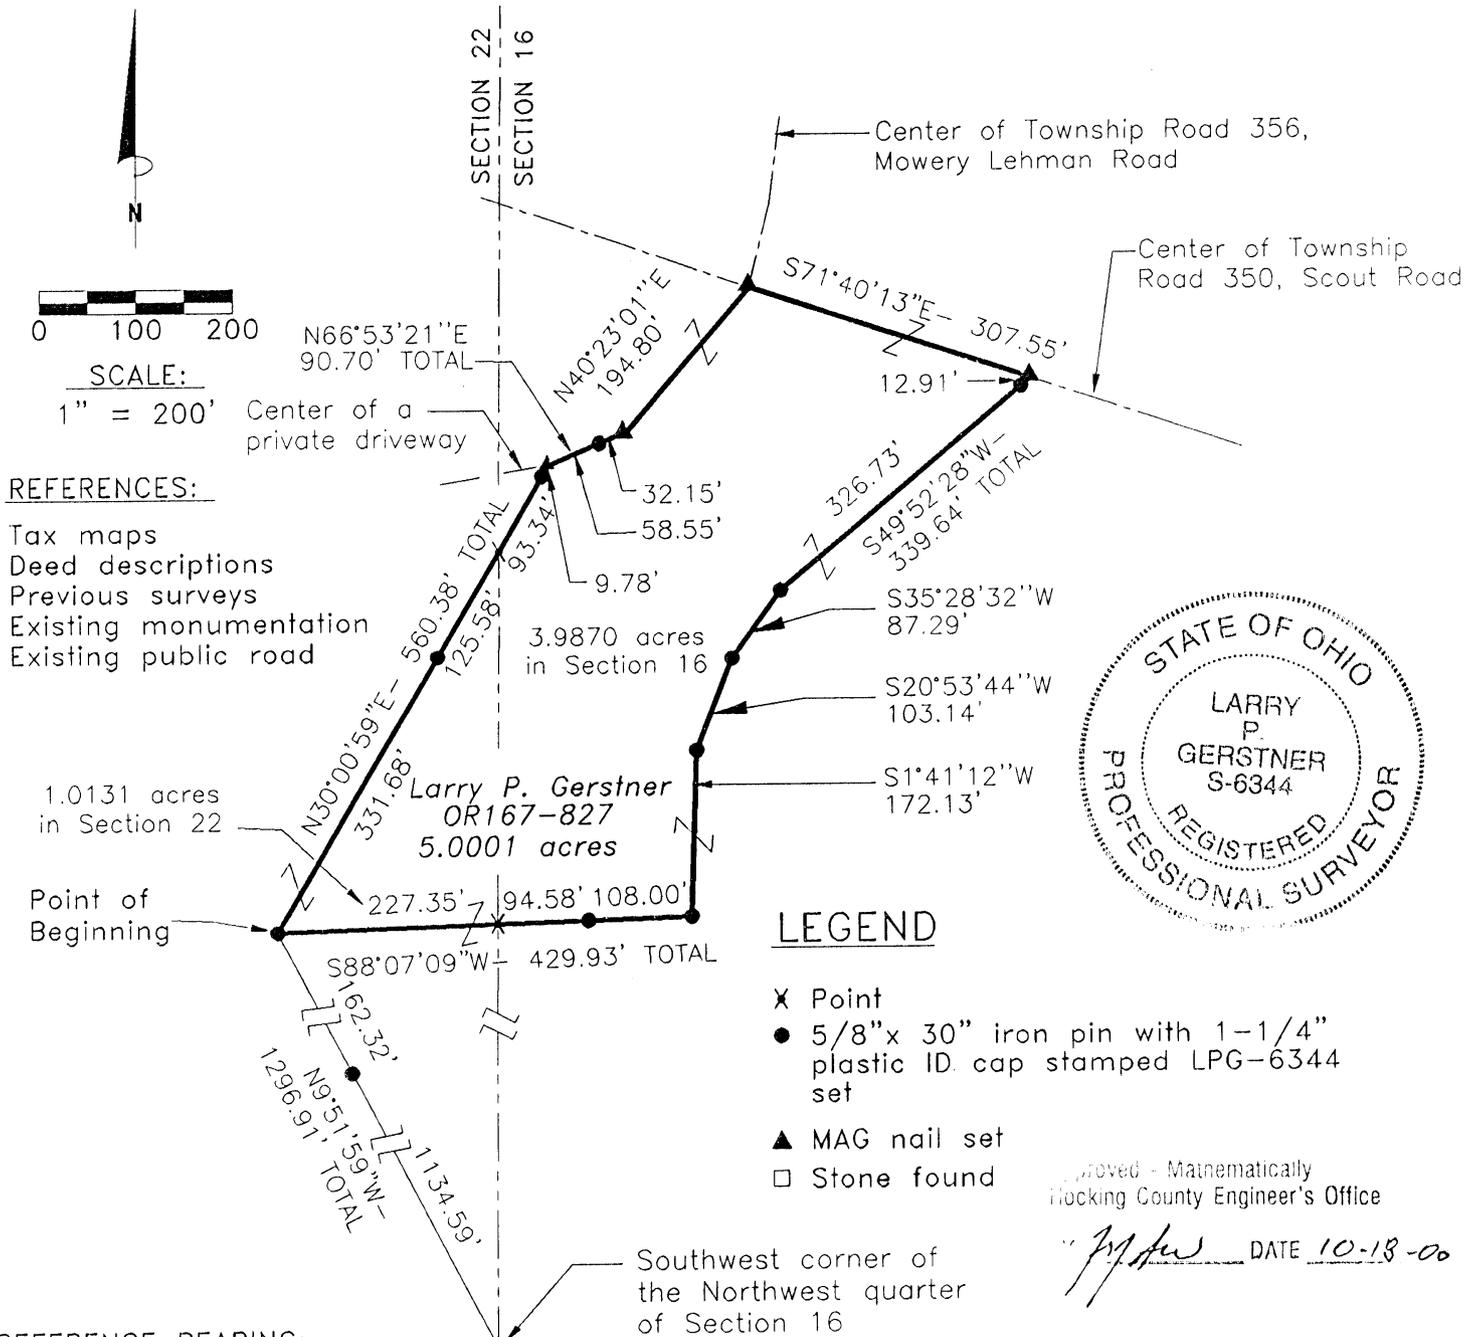

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



LEGEND

- X Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID. cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

Approved - Mathematically
Hocking County Engineer's Office

LPG DATE 10-18-00

REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0001 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 1134.59 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 30 degrees 00 minutes 59 seconds East a distance of 560.38 feet to a MAG nail set in a private driveway, passing into Section 16 at a distance of 457.26 feet and passing 5/8" iron pins set at distances of 331.68 feet and 550.60 feet;

thence with said private driveway the following two bearings and distances:

1) North 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 58.55 feet;

2) North 40 degrees 23 minutes 01 second East a distance of 194.80 feet to a MAG nail set in the intersection of Township Road 350, Scout Road, and Township Road 356, Mowery Lehman Road;

thence with the center of said Township Road 350 South 71 degrees 40 minutes 13 seconds East a distance of 307.55 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 49 degrees 52 minutes 28 seconds West a distance of 339.64 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 12.91 feet;

thence South 35 degrees 28 minutes 32 seconds West a distance of 87.29 feet to a 5/8" iron pin set;

thence South 20 degrees 53 minutes 44 seconds West a distance of 103.14 feet to a 5/8" iron pin set;

thence South 1 degree 41 minutes 12 seconds West a distance of 172.13 feet to a 5/8" iron pin set;

thence South 88 degrees 07 minutes 09 seconds West a distance of 429.93 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 108.00 feet, passing back into Section 22 at a distance of 202.58 feet, containing 5.0001 acres more or less with 1.0131 acres more or less being in Section 22 and 3.9870 acres more or less being in Section 16, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.

The above 5.0001 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 10-18-06

[Signature]

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 8.636 ACRE TRACT FOR THE BOY SCOUT PROPERTY


8.636 ac.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

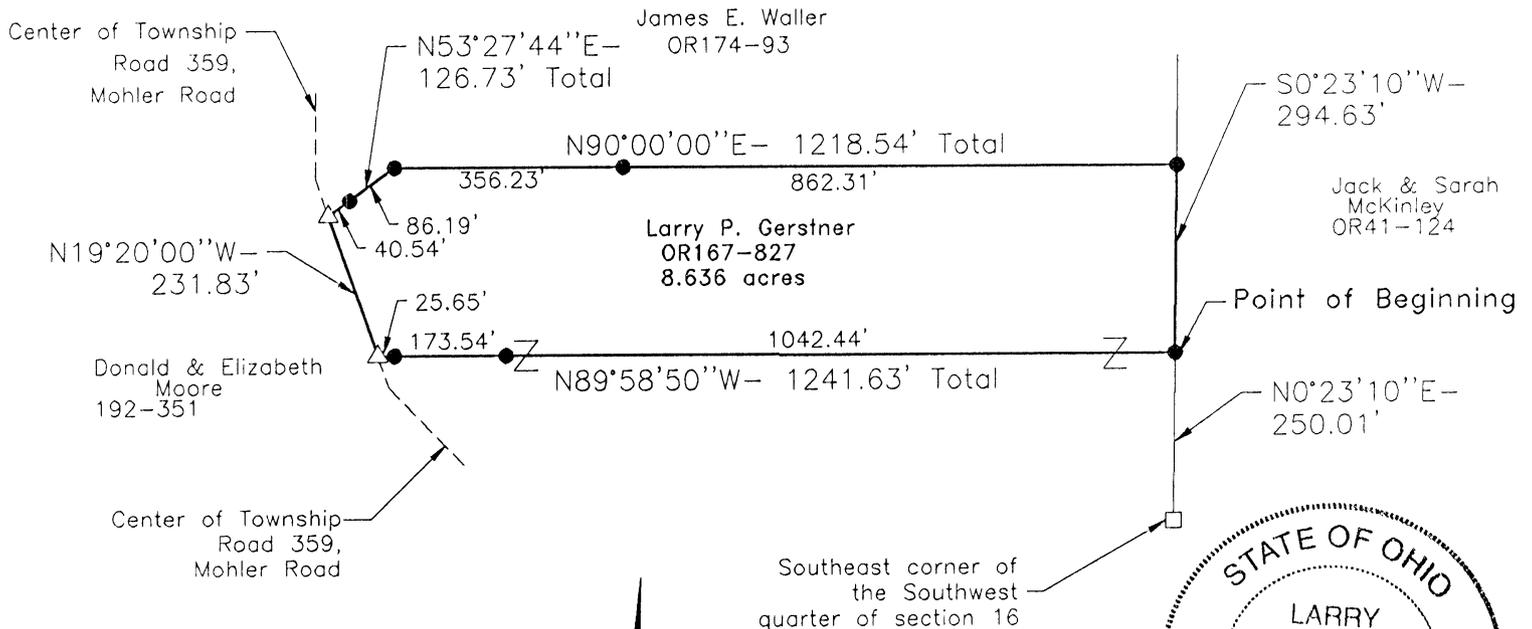

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



SCALE:
1" = 300'

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

Approved - Mathematically
Hocking County Engineer's Office
by *[Signature]* DATE 8-9-00

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 8.636 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 250.01 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 89 degrees 58 minutes 50 seconds West a distance of 1241.63 feet to a MAG nail set in the surface of Township Road 359, Mohler Road, and passing 5/8" iron pins set at distances of 1042.44 feet and 1215.98 feet;

thence with the surface of said Township Road 359 North 19 degrees 20 minutes 00 seconds West a distance of 231.83 feet to a MAG nail set;

thence leaving the surface of said Township Road 359 North 53 degrees 27 minutes 44 seconds East a distance of 126.73 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 40.54 feet;

thence North 90 degrees 00 minutes 00 seconds East a distance of 1218.54 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 356.23 feet;

thence South 0 degrees 23 minutes 10 seconds West a distance of 294.63 feet to the point of beginning, containing 8.636 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 8.636 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY Jyfa DATE 8-9-00

Larry P. Gerstner




Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0023 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0023 Ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

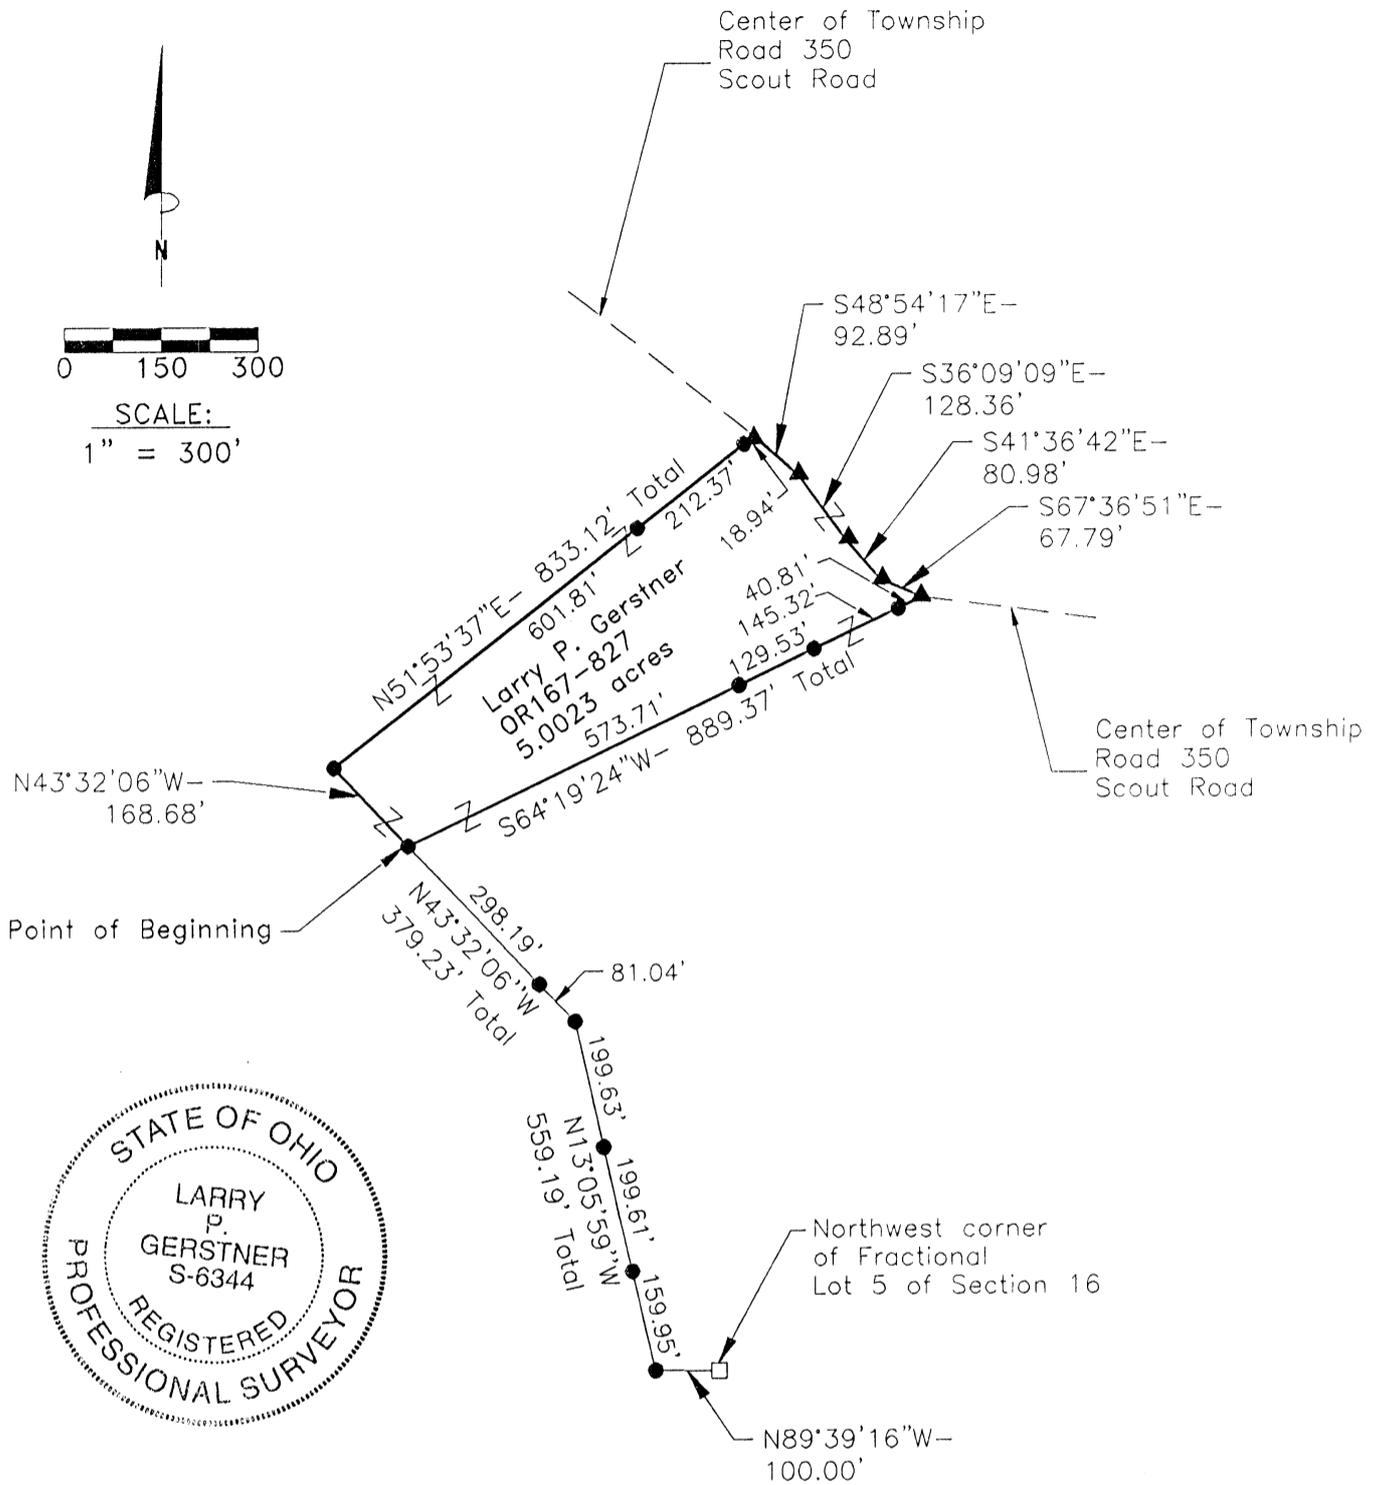

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
Hocking County Engineer's Office

BY *[Signature]* DATE 8-25-00

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0023 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 559.19 feet to a 5/8" iron pin set, passing a 5/8" iron pins set at distances of 159.95 feet and 359.56 feet; thence North 43 degrees 32 minutes 06 seconds West a distance of 379.23 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 81.04 feet, and being the point of **Beginning** of the tract of land to be described;

thence continuing North 43 degrees 32 minutes 06 seconds West a distance of 168.68 feet to a 5/8" iron pin set;

thence North 51 degrees 53 minutes 37 seconds East a distance of 833.12 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 601.81 feet, and 814.18 feet;

thence with the center of said Township Road 350 the following four bearings and distances:

- 1) South 48 degrees 54 minutes 17 seconds East a distance of 92.89 feet to a MAG nail set;
- 2) South 36 degrees 09 minutes 09 seconds East a distance of 128.36 feet to a MAG nail set;
- 3) South 41 degrees 36 minutes 42 seconds East a distance of 80.98 feet to a MAG nail set;
- 4) South 67 degrees 36 minutes 51 seconds East a distance of 67.79 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 64 degrees 19 minutes 24 seconds West a distance of 889.37 feet to the point of beginning, passing 5/8" iron pins set at distances of 40.81 feet, 186.13 feet, and 315.66 feet, containing 5.0023 acres more or less, and subject to the public easement of said Township Roads 350 and any other public or private easements of record.

The above 5.0023 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY JPAW DATE 8-25-00

Larry P. Gerstner


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.0004 ac.

PLAT OF A 5.0004 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

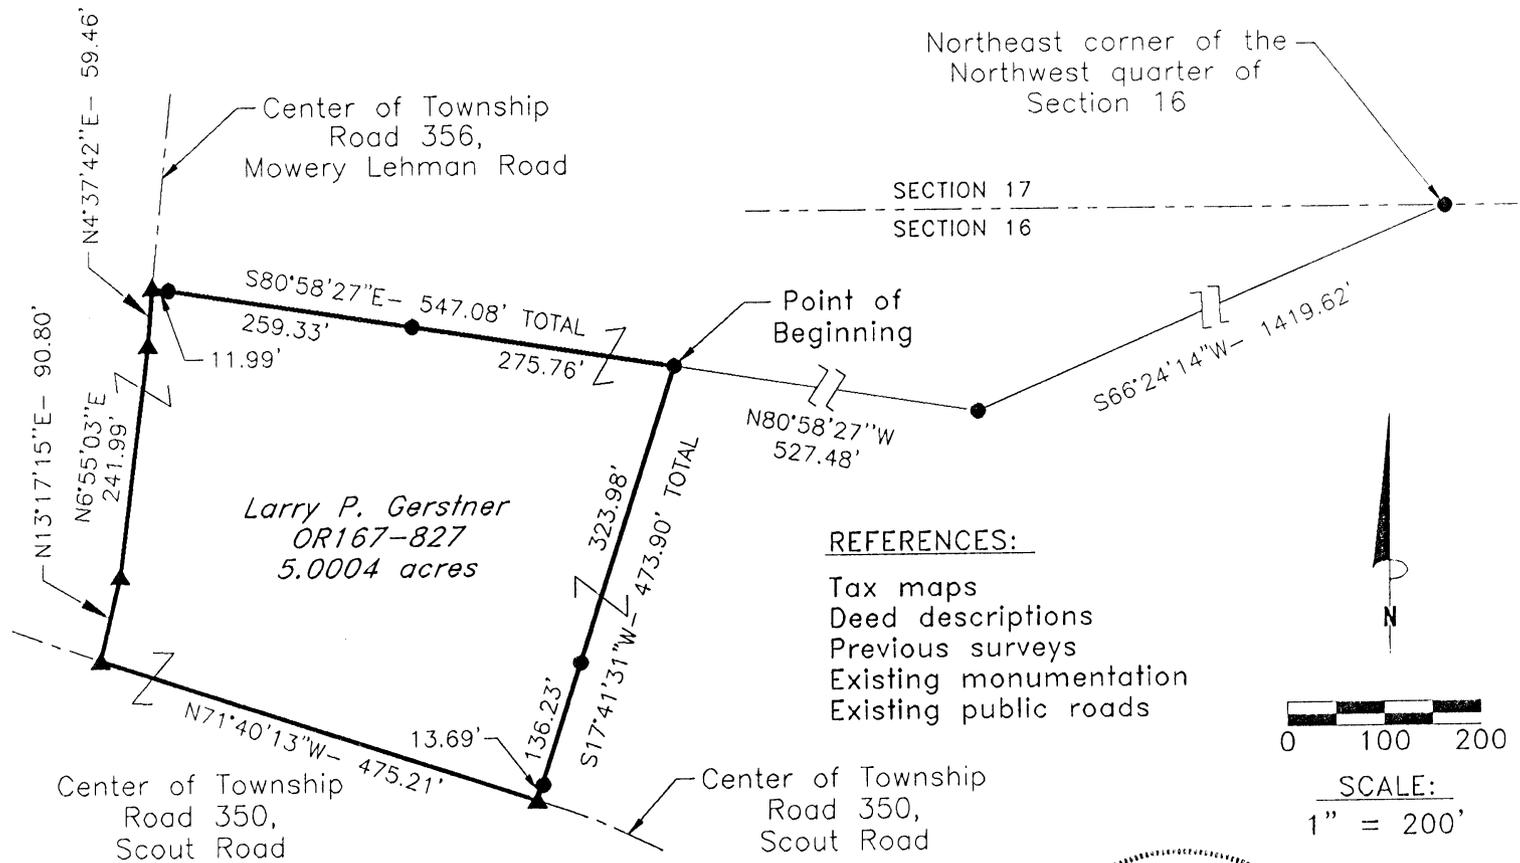

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
 - ▲ MAG nail set
- Approved - Mathematically
Hocking County Engineer's Office

BY *[Signature]* DATE 8-31-00



REFERENCE BEARING:

The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 22nd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0004 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a 5/8" iron pin set at the Northeast corner of the Northwest quarter of Section 16; thence leaving the North line of Section 16 South 66 degrees 24 minutes 14 seconds West a distance of 1419.62 feet to a 5/8" iron pin set; thence North 80 degrees 58 minutes 27 seconds West a distance of 527.48 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence South 17 degrees 41 minutes 31 seconds West a distance of 473.90 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 323.98 feet and 460.21 feet;

thence with the center of said Township Road 350 North 71 degrees 40 minutes 13 seconds West a distance of 475.21 feet to a MAG nail set in the intersection of Township Road 356, Mowery Lehman Road;

thence leaving the center of said Township Road 350 and with the center of said Township Road 356 the following three bearings and distances:

- 1) North 13 degrees 17 minutes 15 seconds East a distance of 90.80 feet to a MAG nail set;
- 2) North 6 degrees 55 minutes 03 seconds East a distance of 241.99 feet to a MAG nail set;
- 3) North 4 degrees 37 minutes 42 seconds East a distance of 59.46 feet to a MAG nail set;

thence leaving the center of said Township Road 356 South 80 degrees 58 minutes 27 seconds East a distance of 547.08 feet to the point of beginning, passing 5/8" iron pins set at distances of 11.99 feet and 271.32 feet, containing 5.0004 acres more or less, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.

The above 5.0004 acre survey is intended to describe part of the 168 acre Tract Four as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and existing public roads. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 22, 2000.

Approved - Mathematically
Hocking County Engineer's Office

J.P.G. DATE 8-31-00

Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

SURVEY DESCRIPTION OF A 5.0010 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 60 degrees 42 minutes 55 seconds West a distance of 477.06 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 309.98 feet;

thence North 16 degrees 21 minutes 53 seconds East a distance of 603.33 feet to a 5/8" iron pin set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 475.28 feet and 579.51 feet;

thence with the center of said Township Road 351 the following two bearings and distances:

- 1) South 52 degrees 44 minutes 33 seconds East a distance of 187.33 feet to a 5/8" iron pin set;
- 2) South 48 degrees 25 minutes 15 seconds East a distance of 135.16 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 351 South 0 degrees 23 minutes 10 seconds West a distance of 609.14 feet to the point of beginning, passing a damaged 1/2" iron pin found at a distance of 20.03 feet, containing 5.0010 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0010 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY MS DATE 7-28-00


Larry P. Gerstner

Survey by:
Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 5.0005 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0005 Ac

Situated in Green Township, Hocking County, Ohio; being part of the Northeast quarter of Section 22, and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

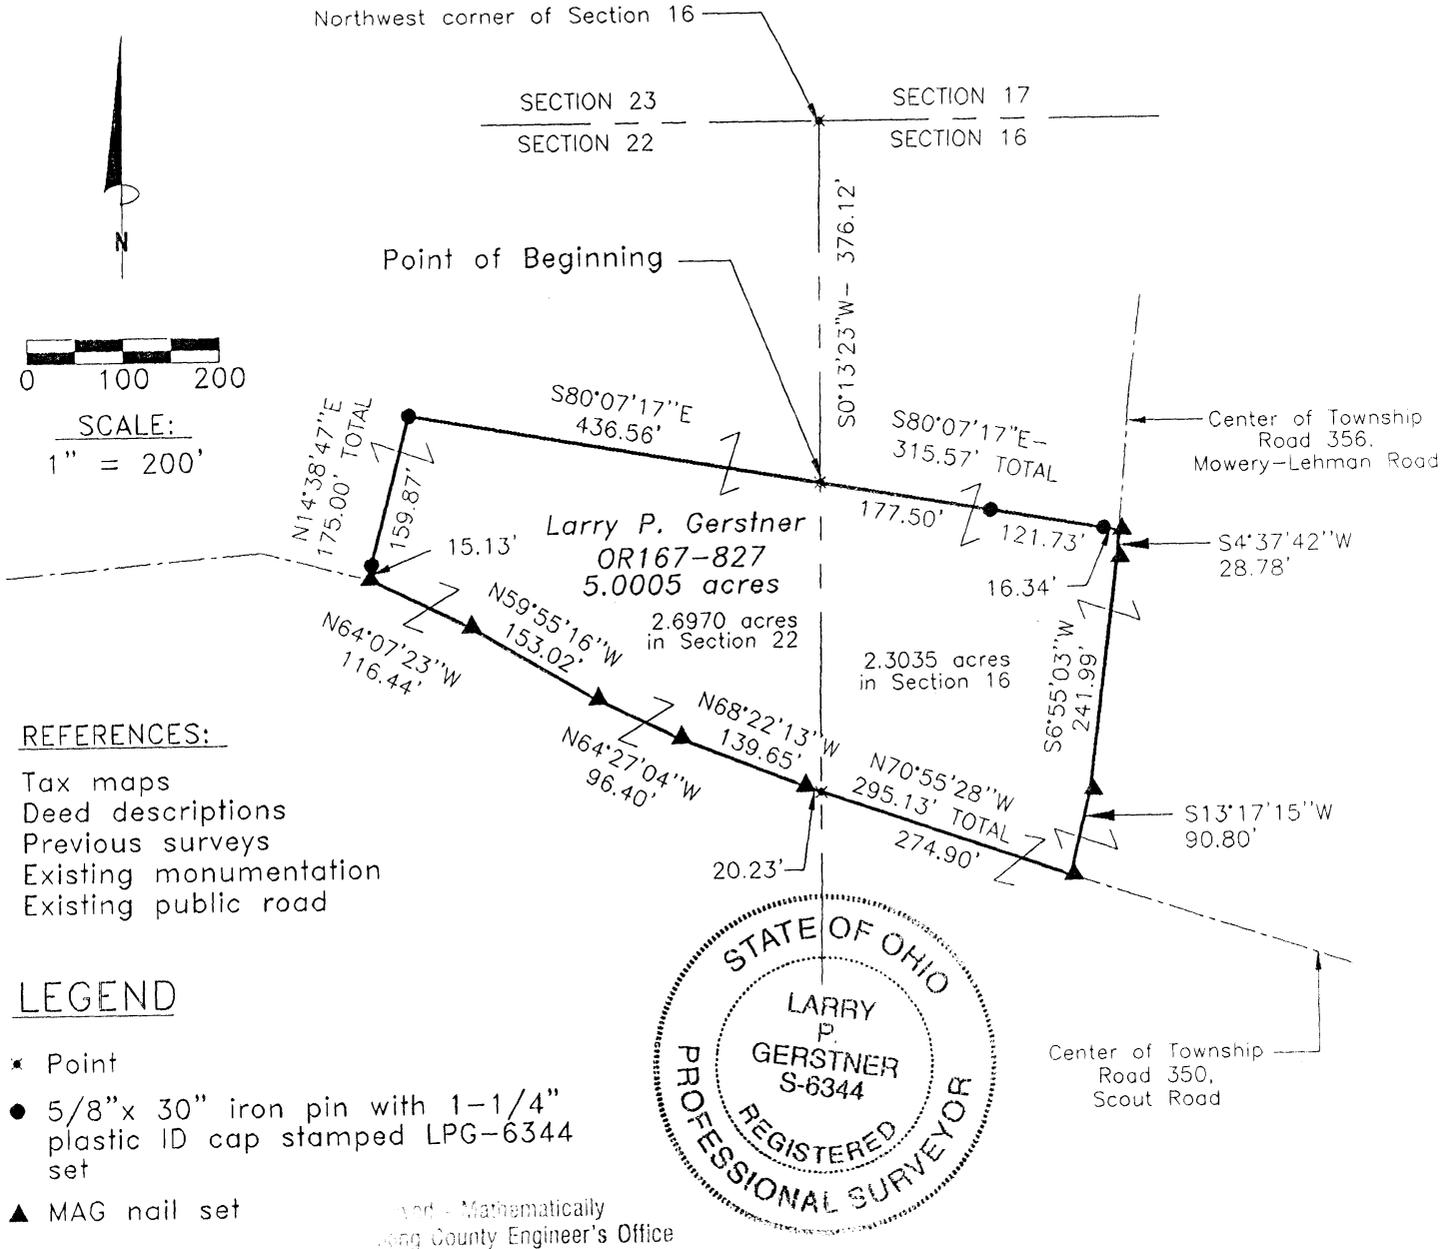

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- ✱ Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set

REFERENCE BEARING:

West line of Section 16 as South 0 degrees 13 minutes 23 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 18th day of September, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0005 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northeast quarter of Section 22, and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a point at Northwest corner of Section 16; thence with the West line of Section 16 South 0 degrees 13 minutes 23 seconds West a distance of 376.12 feet to a point and being the point of **Beginning** of the tract of land to be described;

thence South 80 degrees 07 minutes 17 seconds East a distance of 315.57 feet to a MAG nail set in the center of Township Road 356, Mowery Lehman Road, and passing 5/8" iron pins set at distances of 177.50 feet and 299.23 feet;

thence with the center of said Township Road 356 the following three bearings and distances:

- 1) South 4 degrees 37 minutes 42 seconds West a distance of 28.78 feet to a MAG nail set;
- 2) South 6 degrees 55 minutes 03 seconds West a distance of 241.99 feet to a MAG nail set;
- 3) South 13 degrees 17 minutes 15 seconds West a distance of 90.80 feet to a MAG nail set at the

intersection of Township Road 350, Scout Road;

thence leaving the center of said Township Road 356 and with the center of said Township Road 350 the following five bearings and distances:

1) North 70 degrees 55 minutes 28 seconds West a distance of 295.13 feet to a MAG nail set and passing into Section 22 at a distance of 274.90 feet;

2) North 68 degrees 22 minutes 13 seconds West a distance of 139.65 feet to a MAG nail set;

3) North 64 degrees 27 minutes 04 seconds West a distance of 96.40 feet to a MAG nail set;

4) North 59 degrees 55 minutes 16 seconds West a distance of 153.02 feet to a MAG nail set;

5) North 64 degrees 07 minutes 23 seconds West a distance of 116.44 feet to a MAG nail set;

thence leaving the center of said Township Road 350 North 14 degrees 38 minutes 47 seconds East a distance of 175.00 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 15.13 feet;

thence South 80 degrees 07 minutes 17 seconds East a distance of 436.56 feet to the point of beginning, containing 5.0005 acres more or less with 2.3035 acres more or less being in Section 16 and 2.6970 acres more or less being in Section 22, and subject to the public easements of said Township Roads 356 and 350 and any other public or private easements of record.

The above 5.0005 acre survey is intended to describe part of the 168 acre Tract Four and part of the 165 acre Tract Seven, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation and an existing public road. The reference bearing for this survey is the West line of Section 16 as South 0 degrees 13 minutes 23 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on September 18, 2000.



Approved - Mathematically
Hocking County Engineer's Office

[Signature] DATE 10-20-00

[Signature]

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 15.682 ACRE TRACT FOR RUDY BRANDT

GREEN 16+22
12.33/2.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

LEGEND

- ✱ Point
- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found



REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Hocking County Engineer's Office

JP DATE 10-11-00

Southwest corner of the Northwest quarter of Section 16
Point of Beginning

Paul & Delia
Sihkowitz
OR90-70

Larry P. Gerstner
OR167-827
15.682 acres total

Donald & Elizabeth
Moore
192-351, OR114-564

REFERENCE BEARING:



The West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

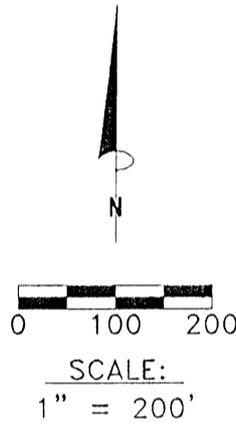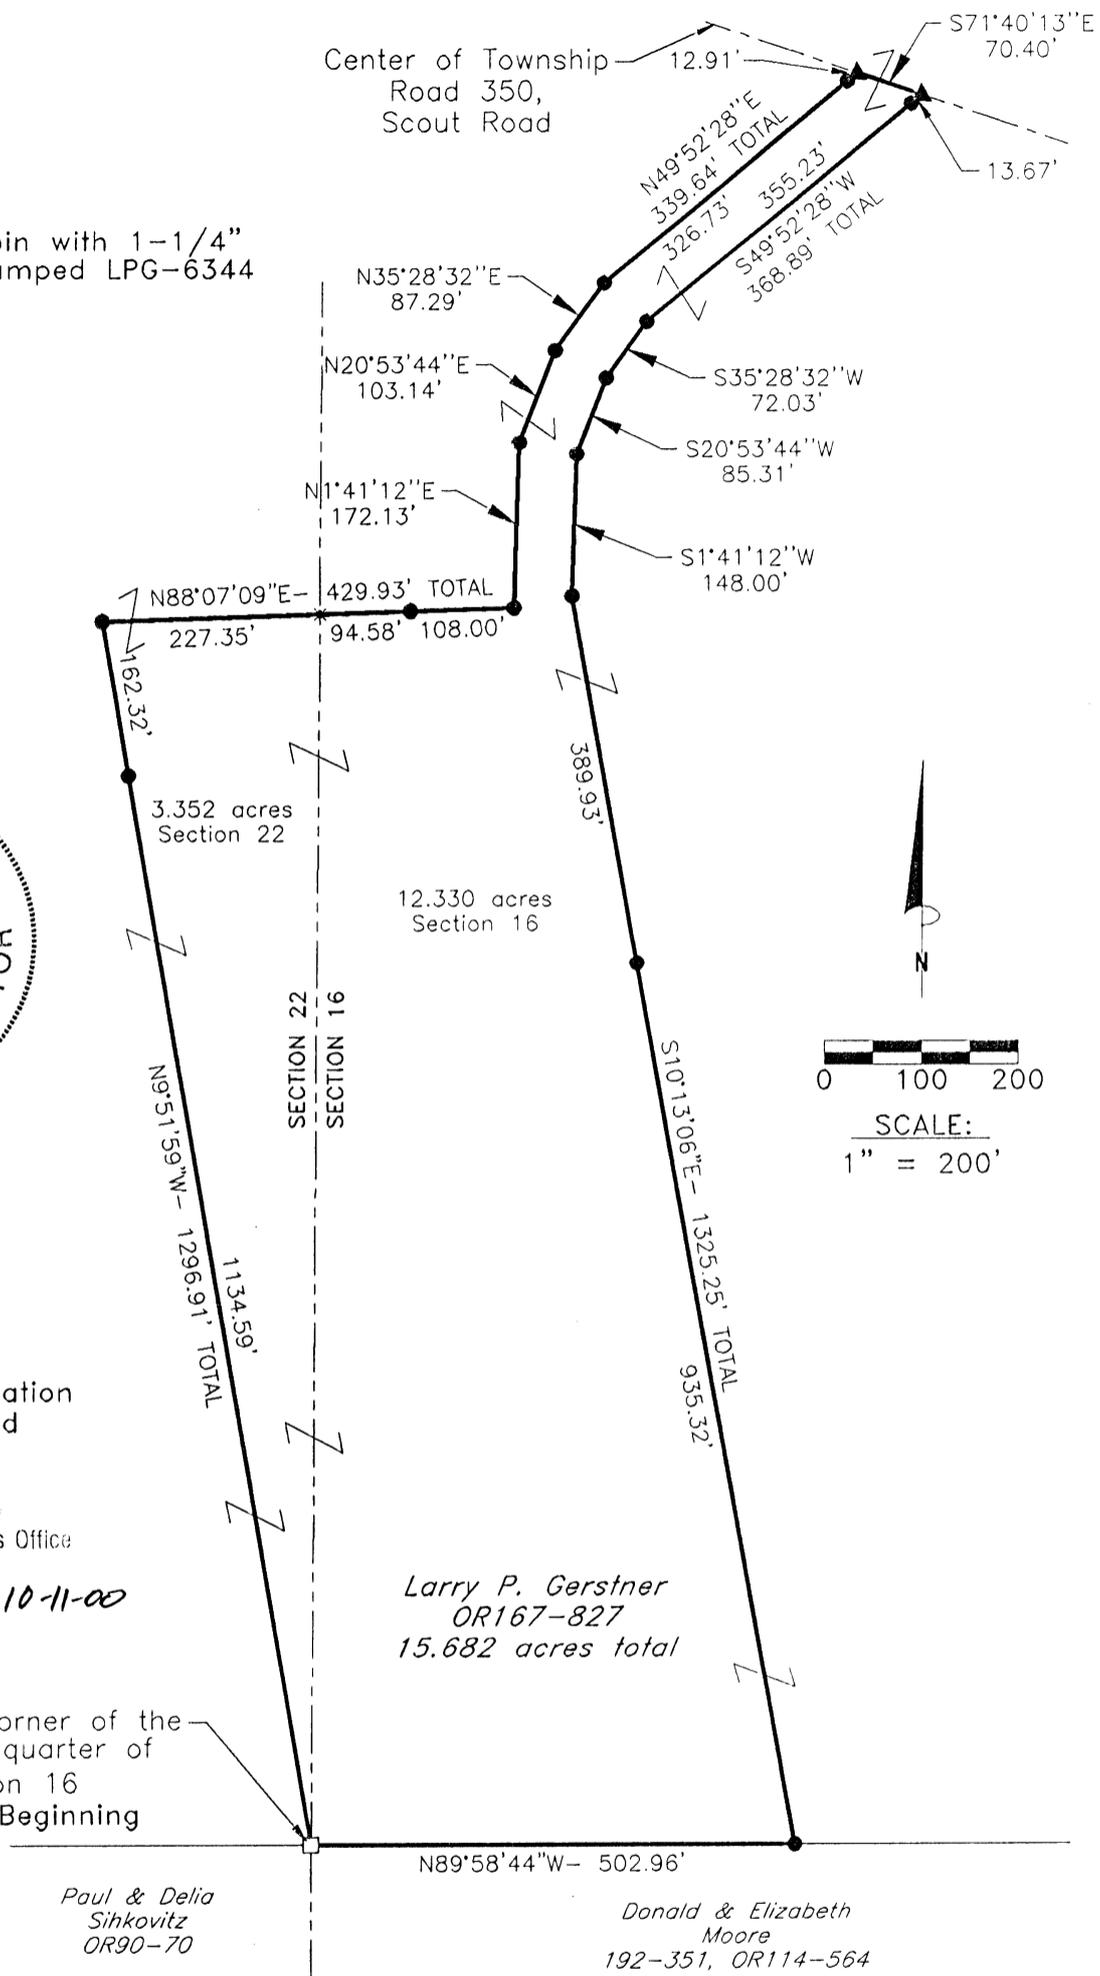

SURVEY DESCRIPTION OF A 15.682 ACRE TRACT FOR RUDY BRANDT

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Southwest corner of the Northwest quarter of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet;

thence North 88 degrees 07 minutes 09 seconds East a distance of 429.93 feet to a 5/8" iron pin set, passing into Section 16 at a distance of 227.35 feet and passing a 5/8" iron pin set at a distance of 321.93 feet;

thence North 1 degree 41 minutes 12 seconds East a distance of 172.13 feet to a 5/8" iron pin set;

thence North 20 degrees 53 minutes 44 seconds East a distance of 103.14 feet to a 5/8" iron pin set;

thence North 35 degrees 28 minutes 32 seconds East a distance of 87.29 feet to a 5/8" iron pin set;

thence North 49 degrees 52 minutes 28 seconds East a distance of 339.64 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing a 5/8" iron pin set at a distance of 326.73 feet;

thence with the center of said Township Road 350 South 71 degrees 40 minutes 13 seconds East a distance of 70.40 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 49 degrees 52 minutes 28 seconds West a distance of 368.89 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 13.67 feet;

thence South 35 degrees 28 minutes 32 seconds West a distance of 72.03 feet to a 5/8" iron pin set;

thence South 20 degrees 53 minutes 44 seconds West a distance of 85.31 feet to a 5/8" iron pin set;

thence South 1 degree 41 minutes 12 seconds West a distance of 148.00 feet to a 5/8" iron pin set;

thence South 10 degrees 13 minutes 06 seconds East a distance of 1325.25 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 389.93 feet;

thence North 89 degrees 58 minutes 44 seconds West a distance of 502.96 feet to the point of beginning, containing 15.682 acres more or less with 3.352 acres more or less being in Section 22 and 12.330 acres more or less being in Section 16, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 15.682 acre survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 3, 2000.



Mathematically
Hocking County Engineer's Office

LPG DATE 10-11-00

Larry P. Gerstner

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16+22

CENTERLINE PLAT OF A 971.07 FEET LONG BY 30 FEET WIDE
EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Easement

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

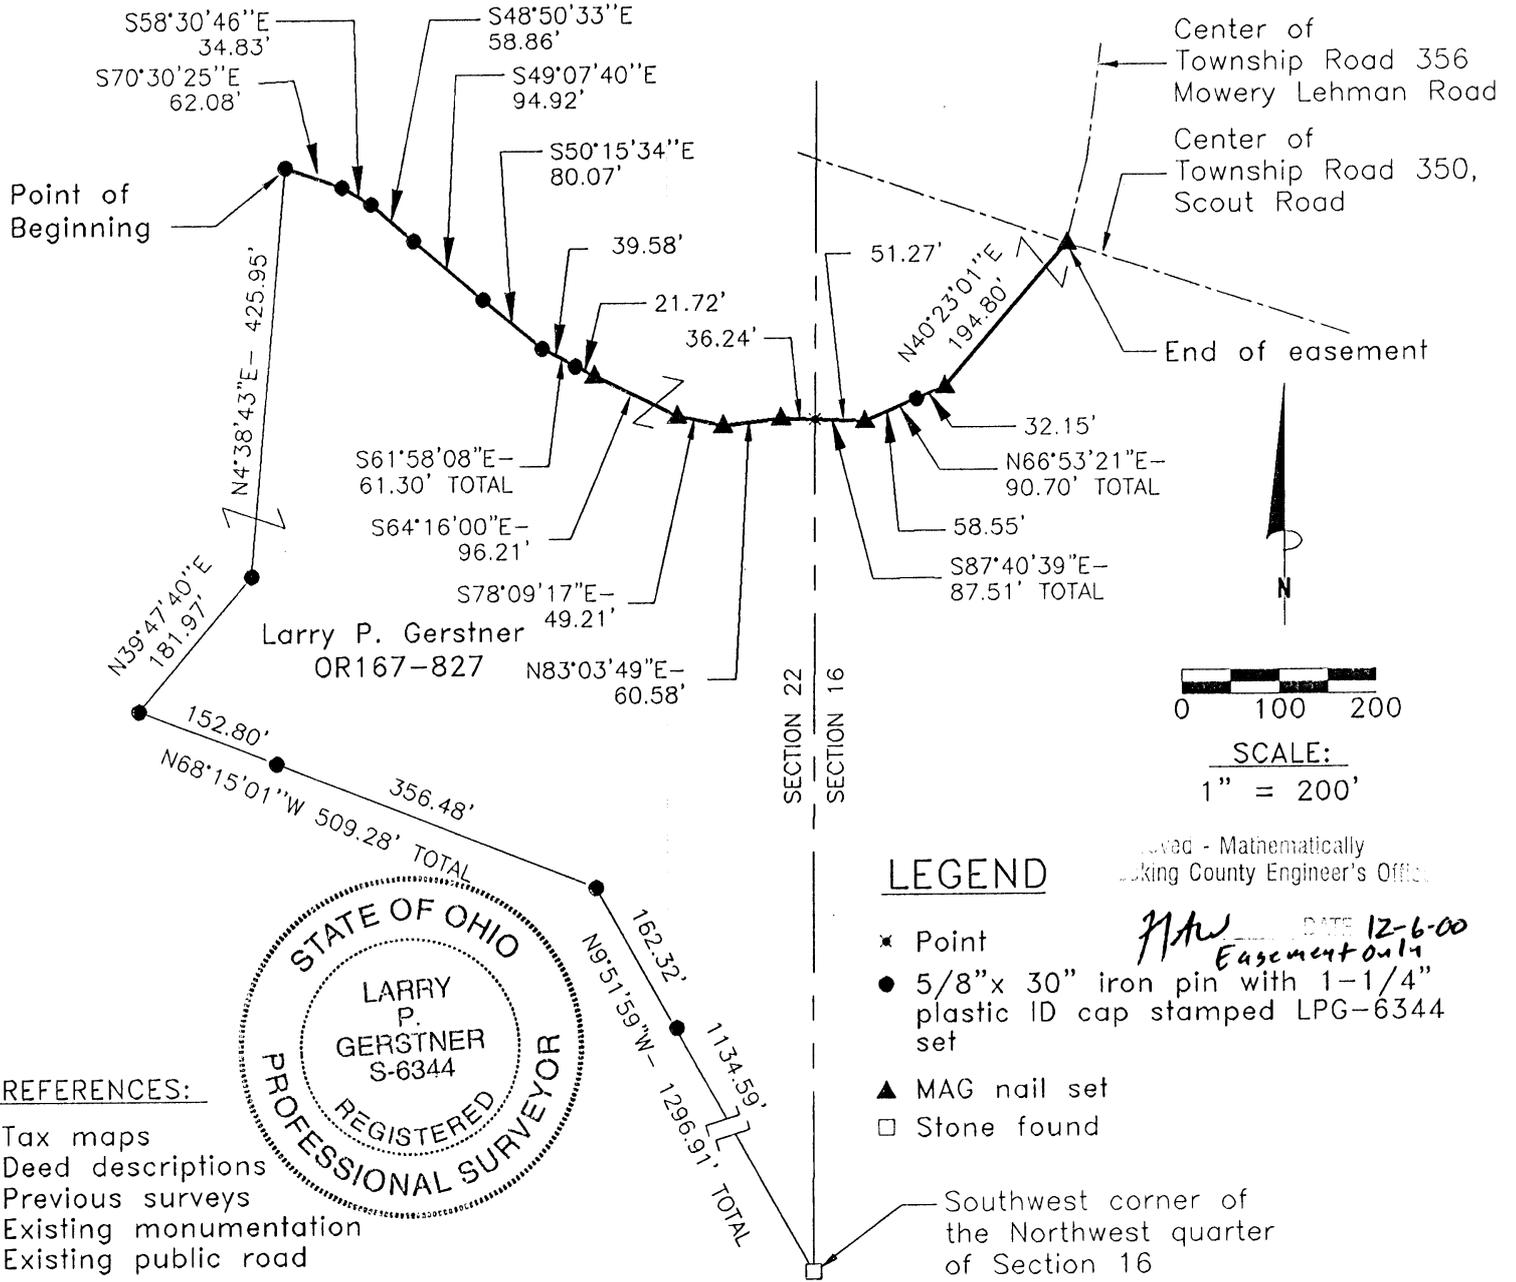

Larry P. Gerstner
Registered Surveyor No. 6344

CENTERLINE SURVEY DESCRIPTION OF A 971.07 FEET LONG BY 30 FEET WIDE

EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; being a 971.07 feet long by 30 feet wide centerline easement of ingress and egress; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest quarter of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 68 degrees 15 minutes 01 second West a distance of 509.28 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 356.48 feet; thence North 39 degrees 47 minutes 40 seconds East a distance of 181.97 feet to a 5/8" iron pin set; thence North 4 degrees 38 minutes 43 seconds East a distance of 425.95 feet to a 5/8" iron pin set and being the point of **Beginning** of the centerline easement of ingress and egress to be described;

thence South 70 degrees 30 minutes 25 seconds East a distance of 62.08 feet to a 5/8" iron pin set;
thence South 58 degrees 30 minutes 46 seconds East a distance of 34.83 feet to a 5/8" iron pin set;
thence South 48 degrees 50 minutes 33 seconds East a distance of 58.86 feet to a 5/8" iron pin set;
thence South 49 degrees 07 minutes 40 seconds East a distance of 94.92 feet to a 5/8" iron pin set;
thence South 50 degrees 15 minutes 34 seconds East a distance of 80.07 feet to a 5/8" iron pin set;
thence South 61 degrees 58 minutes 08 seconds East a distance of 61.30 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 39.58 feet;

thence South 64 degrees 16 minutes 00 seconds East a distance of 96.21 feet to a MAG nail set;
thence South 78 degrees 09 minutes 17 seconds East a distance of 49.21 feet to a MAG nail set;
thence North 83 degrees 03 minutes 49 seconds East a distance of 60.58 feet to a MAG nail set;
thence South 87 degrees 40 minutes 39 seconds East a distance of 87.51 feet to a MAG nail set and passing into Section 16 at a distance of 36.24 feet;

thence North 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 58.55 feet;

thence North 40 degrees 23 minutes 01 second East a distance of 194.80 feet to a MAG nail set in the intersection of Township Road 350, Scout Road, and Township Road 356, Mowery Lehman Road, being the end of a 971.07 feet long by 30 feet wide easement of ingress and egress, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.


The above centerline easement of ingress and egress survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.

160 - Mathematically
Hocking County Engineer's Office

M. Gerstner DATE 12-6-00

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

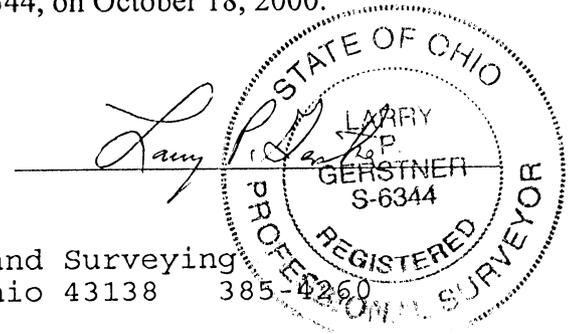


GREEN 16
Easement

CENTERLINE PLAT OF A 726.61 FEET LONG BY 30 FEET WIDE EASEMENT OF
INGRESS AND EGRESS FOR RUDY BRANDT


Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

LEGEND

- ✱ Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found

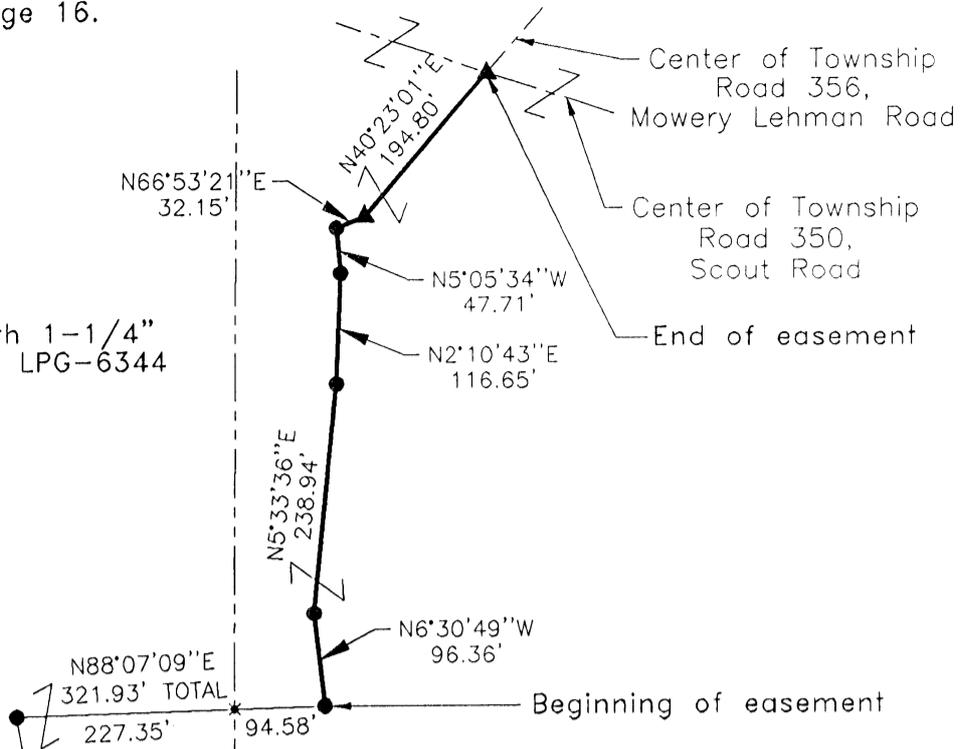

Larry P. Gerstner
OR167-827
15.682 acres total

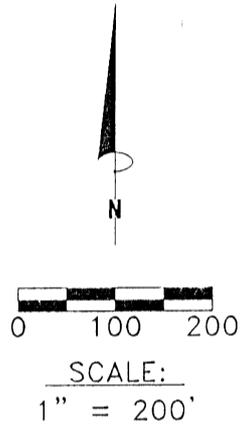

Easement only
Hocking County Engineer's Office
DATE 10-11-00

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



Southwest corner of the Northwest quarter of Section 16

Paul & Delia
Sihkowitz
OR90-70

Donald & Elizabeth
Moore
192-351, OR114-564

REFERENCE BEARING:

The West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

CENTERLINE SURVEY DESCRIPTION OF A 726.61 FEET LONG BY 30 FEET WIDE

EASEMENT OF INGRESS AND EGRESS FOR RUDY BRANDT

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; being a 726.61 feet long by 30 feet wide centerline easement of ingress and egress; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest quarter of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 88 degrees 07 minutes 09 seconds East a distance of 321.93 feet to a 5/8" iron pin set, passing into Section 16 at a distance of 227.35 feet, and being the point of **Beginning** of the centerline easement of ingress and egress to be described;

thence North 6 degrees 30 minutes 49 seconds West a distance of 96.36 feet to a 5/8" iron pin set;

thence North 5 degrees 33 minutes 36 seconds East a distance of 238.94 feet to a 5/8" iron pin set;

thence North 2 degrees 10 minutes 43 seconds East a distance of 116.65 feet to a 5/8" iron pin set;

thence North 5 degrees 05 minutes 34 seconds West a distance of 47.71 feet to a 5/8" iron pin set;

thence North 66 degrees 53 minutes 21 seconds East a distance of 32.15 feet to a MAG nail set;

thence North 40 degrees 23 minutes 01 second East a distance of 194.80 feet to a MAG nail set in the intersection of Township Road 350, Scout Road, and Township Road 356, Mowery Lehman Road, being the end of a 726.61 feet long by 30 feet wide easement of ingress and egress, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.

The above centerline easement of ingress and egress survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 3, 2000.

Easement Only
Hocking County Engineer's Office
M JH DATE 10-11-00

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5-0967C


PLAT OF A 5.096 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

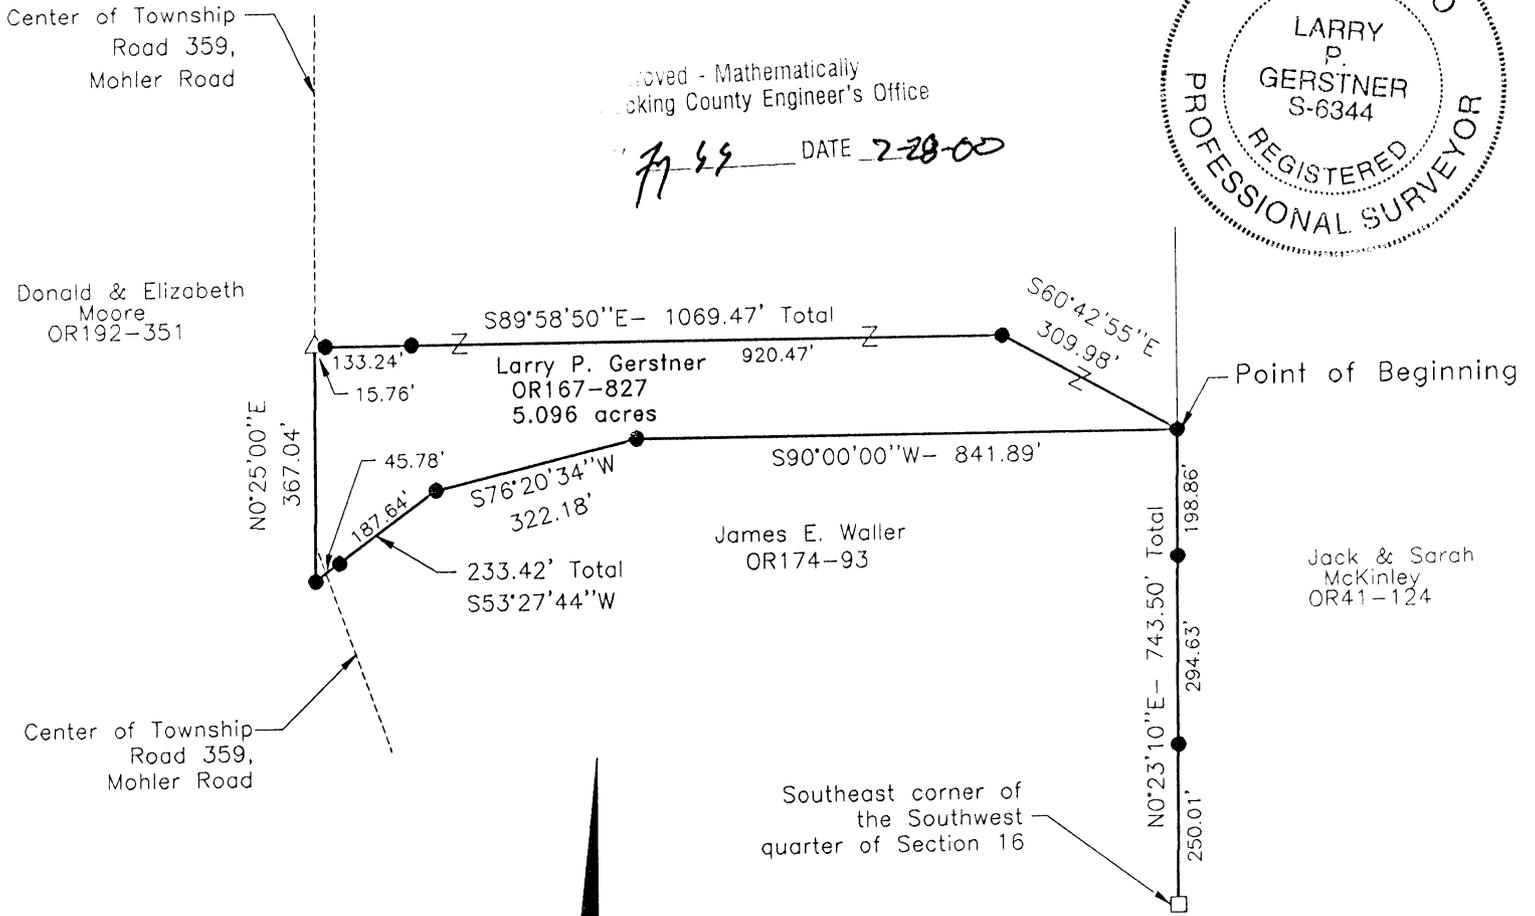

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



SCALE:
 1" = 300'

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.096 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 90 degrees 00 minutes 00 seconds West a distance of 841.89 feet to a 5/8" iron pin set;

thence South 76 degrees 20 minutes 34 seconds West a distance of 322.18 feet to a 5/8" iron pin set;

thence South 53 degrees 27 minutes 44 seconds West a distance of 233.42 feet to a 5/8" iron pin set off of Township Road 359, Mohler Road, and passing a 5/8" iron pin set at a distance of 187.64 feet;

thence with the surface of said Township Road 359 North 0 degrees 25 minutes 00 seconds East a distance of 367.04 feet to a MAG nail set;


thence leaving the surface of said Township Road 359 South 89 degrees 58 minutes 50 seconds East a distance of 1069.47 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 15.76 feet and 149.00 feet;

thence South 60 degrees 42 minutes 55 seconds East a distance of 309.98 feet to the point of beginning, containing 5.096 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 5.096 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mathematically
Hocking County Engineer's Office

7/13 DATE 7-28-00

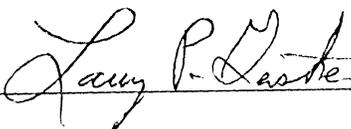



Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 5.0022 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5-0022 A.

Situated in Green Township, Hocking County, Ohio; being part of Northwest quarter of Section 16, Township 13, Range 16.

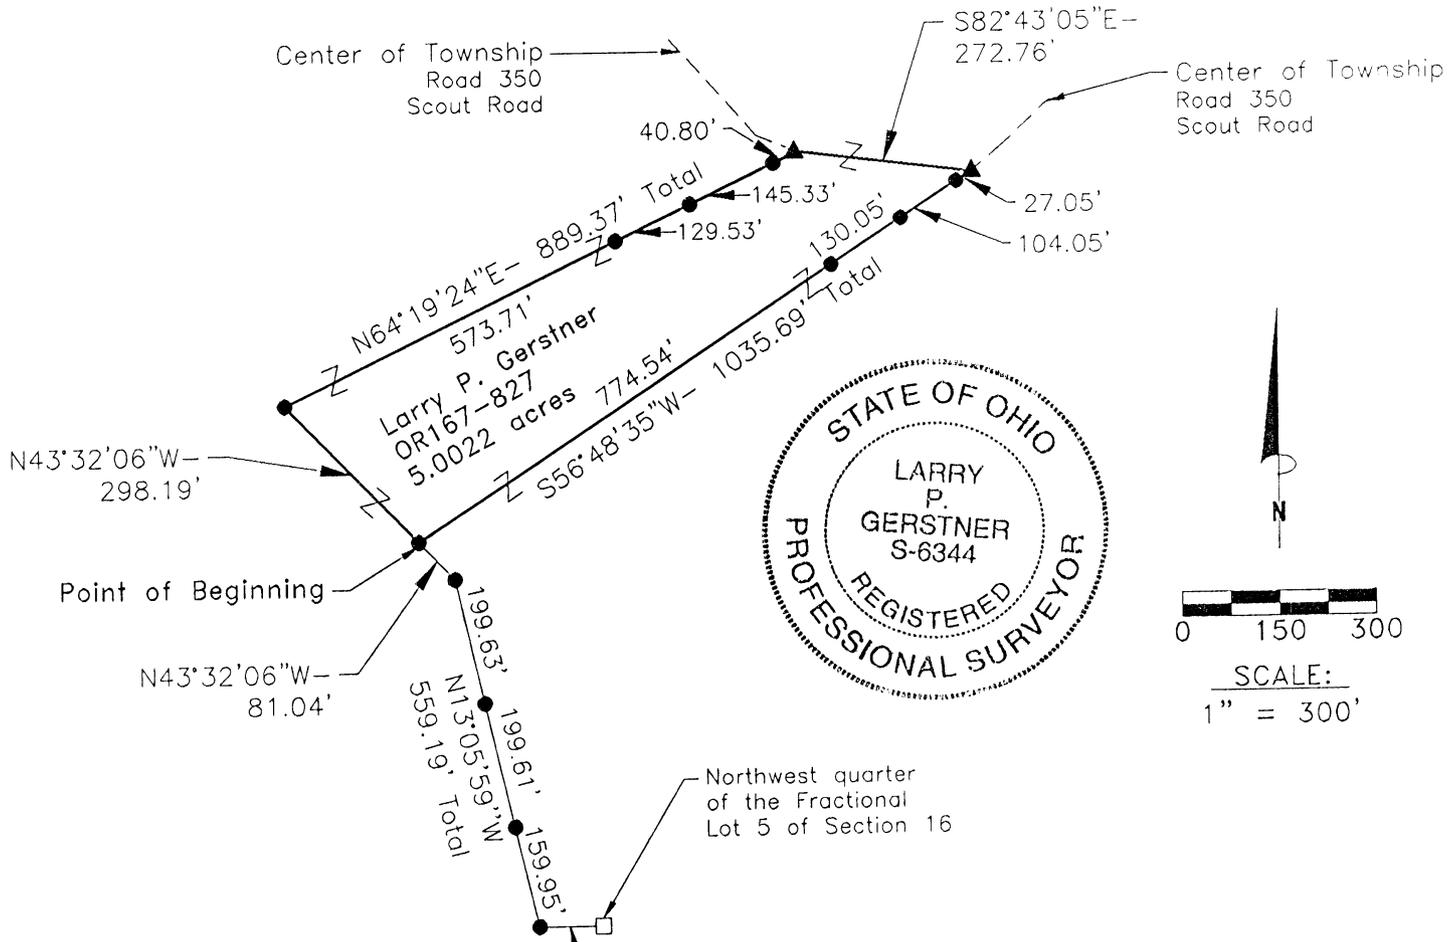

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
 - ▲ MAG nail set
 - Stone found
- Approved - Mathematically
Hocking County Engineer's Office

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

BY *LPG* DATE 8-25-00

SURVEY DESCRIPTION OF A 5.0022 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set; thence North 13 degrees 05 minutes 59 seconds West a distance of 559.19 feet to a 5/8" iron pin set, passing a 5/8" iron pins set at distances of 159.95 feet and 359.56 feet; thence North 43 degrees 32 minutes 06 seconds West a distance of 81.04 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence continuing North 43 degrees 32 minutes 06 seconds West a distance of 298.19 feet to a 5/8" iron pin set;

thence North 64 degrees 19 minutes 24 seconds East a distance of 889.37 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing 5/8" iron pins set at distances of 573.71 feet, 703.24 feet, and 848.57 feet;

thence with the center of said Township Road 350 South 82 degrees 43 minutes 05 seconds East a distance of 272.76 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 56 degrees 48 minutes 35 seconds West a distance of 1035.69 feet to the point of beginning, passing 5/8" iron pins set at distances of 27.05 feet, 131.10 feet, and 261.15 feet, containing 5.0022 acres more or less, and subject to the public easement of said Township Roads 350 and any other public or private easements of record.

The above 5.0022 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on August 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

LPG DATE 8-25-00

Larry P. Gerstner


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.0008 AC.

PLAT OF A 5.0008 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16.

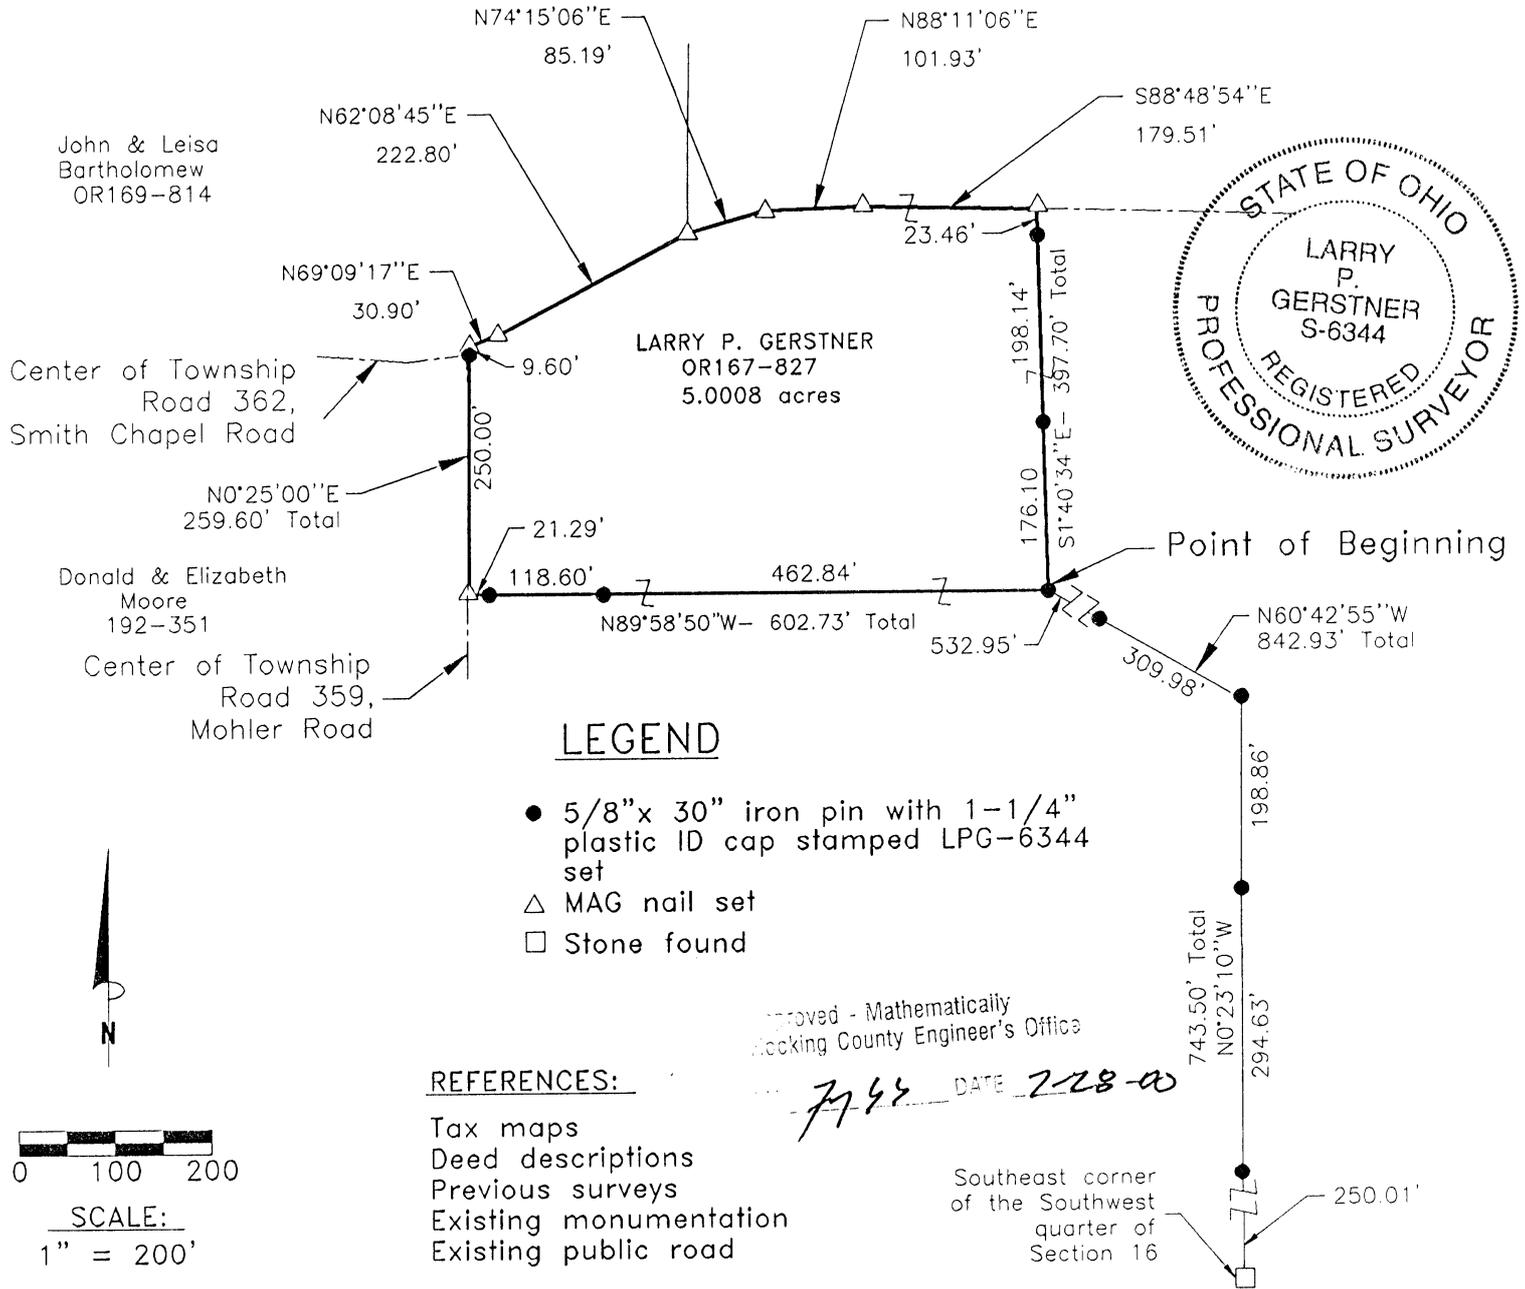

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found


REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
 Hocking County Engineer's Office

7743 DATE 2-28-00

Southeast corner of the Southwest quarter of Section 16

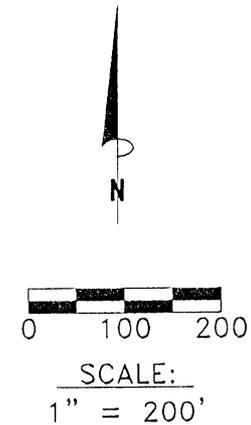

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.0008 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet; thence North 60 degrees 42 minutes 55 seconds West a distance of 842.93 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 309.98 feet and 477.06 feet, and being the point of **Beginning** of the tract of land to be described;

thence North 89 degrees 58 minutes 50 seconds West a distance of 602.73 feet to a MAG nail set in the center of Township Road 359, Mohler Road, and passing 5/8" iron pins set at distances of 462.85 feet and 581.45 feet;

thence with the center of said Township Road 359 North 0 degrees 25 minutes 00 seconds East a distance of 259.60 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 250.00 feet at the intersection of Township Road 362, Smith Chapel Road;

thence leaving the center of said Township Road 359 and with the center of said Township Road 362 the following five bearings and distances:

- 1) North 69 degrees 09 minutes 17 seconds East a distance of 30.90 feet to a MAG nail set;
- 2) North 62 degrees 08 minutes 45 seconds East a distance of 222.80 feet to a MAG nail set;
- 3) North 74 degrees 15 minutes 06 seconds East a distance of 85.19 feet to a MAG nail set;
- 4) North 88 degrees 11 minutes 06 seconds East a distance of 101.93 feet to a MAG nail set;
- 5) South 88 degrees 48 minutes 54 seconds East a distance of 179.51 feet to a MAG nail set;

thence leaving the center of said Township Road 362 South 1 degree 40 minutes 34 seconds East a distance of 397.70 feet to the point of beginning, passing 5/8" iron pins set at distances of 23.46 feet and 221.60 feet, containing 5.0008 acres more or less, and subject to the public easements of said Township Roads 359 and 362 and any other public or private easements of record.

The above 5.0008 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY 7/4/00 DATE 7-28-00

A handwritten signature in black ink that reads "Larry P. Gerstner".


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5,0009 Ac.


PLAT OF A 5.0009 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

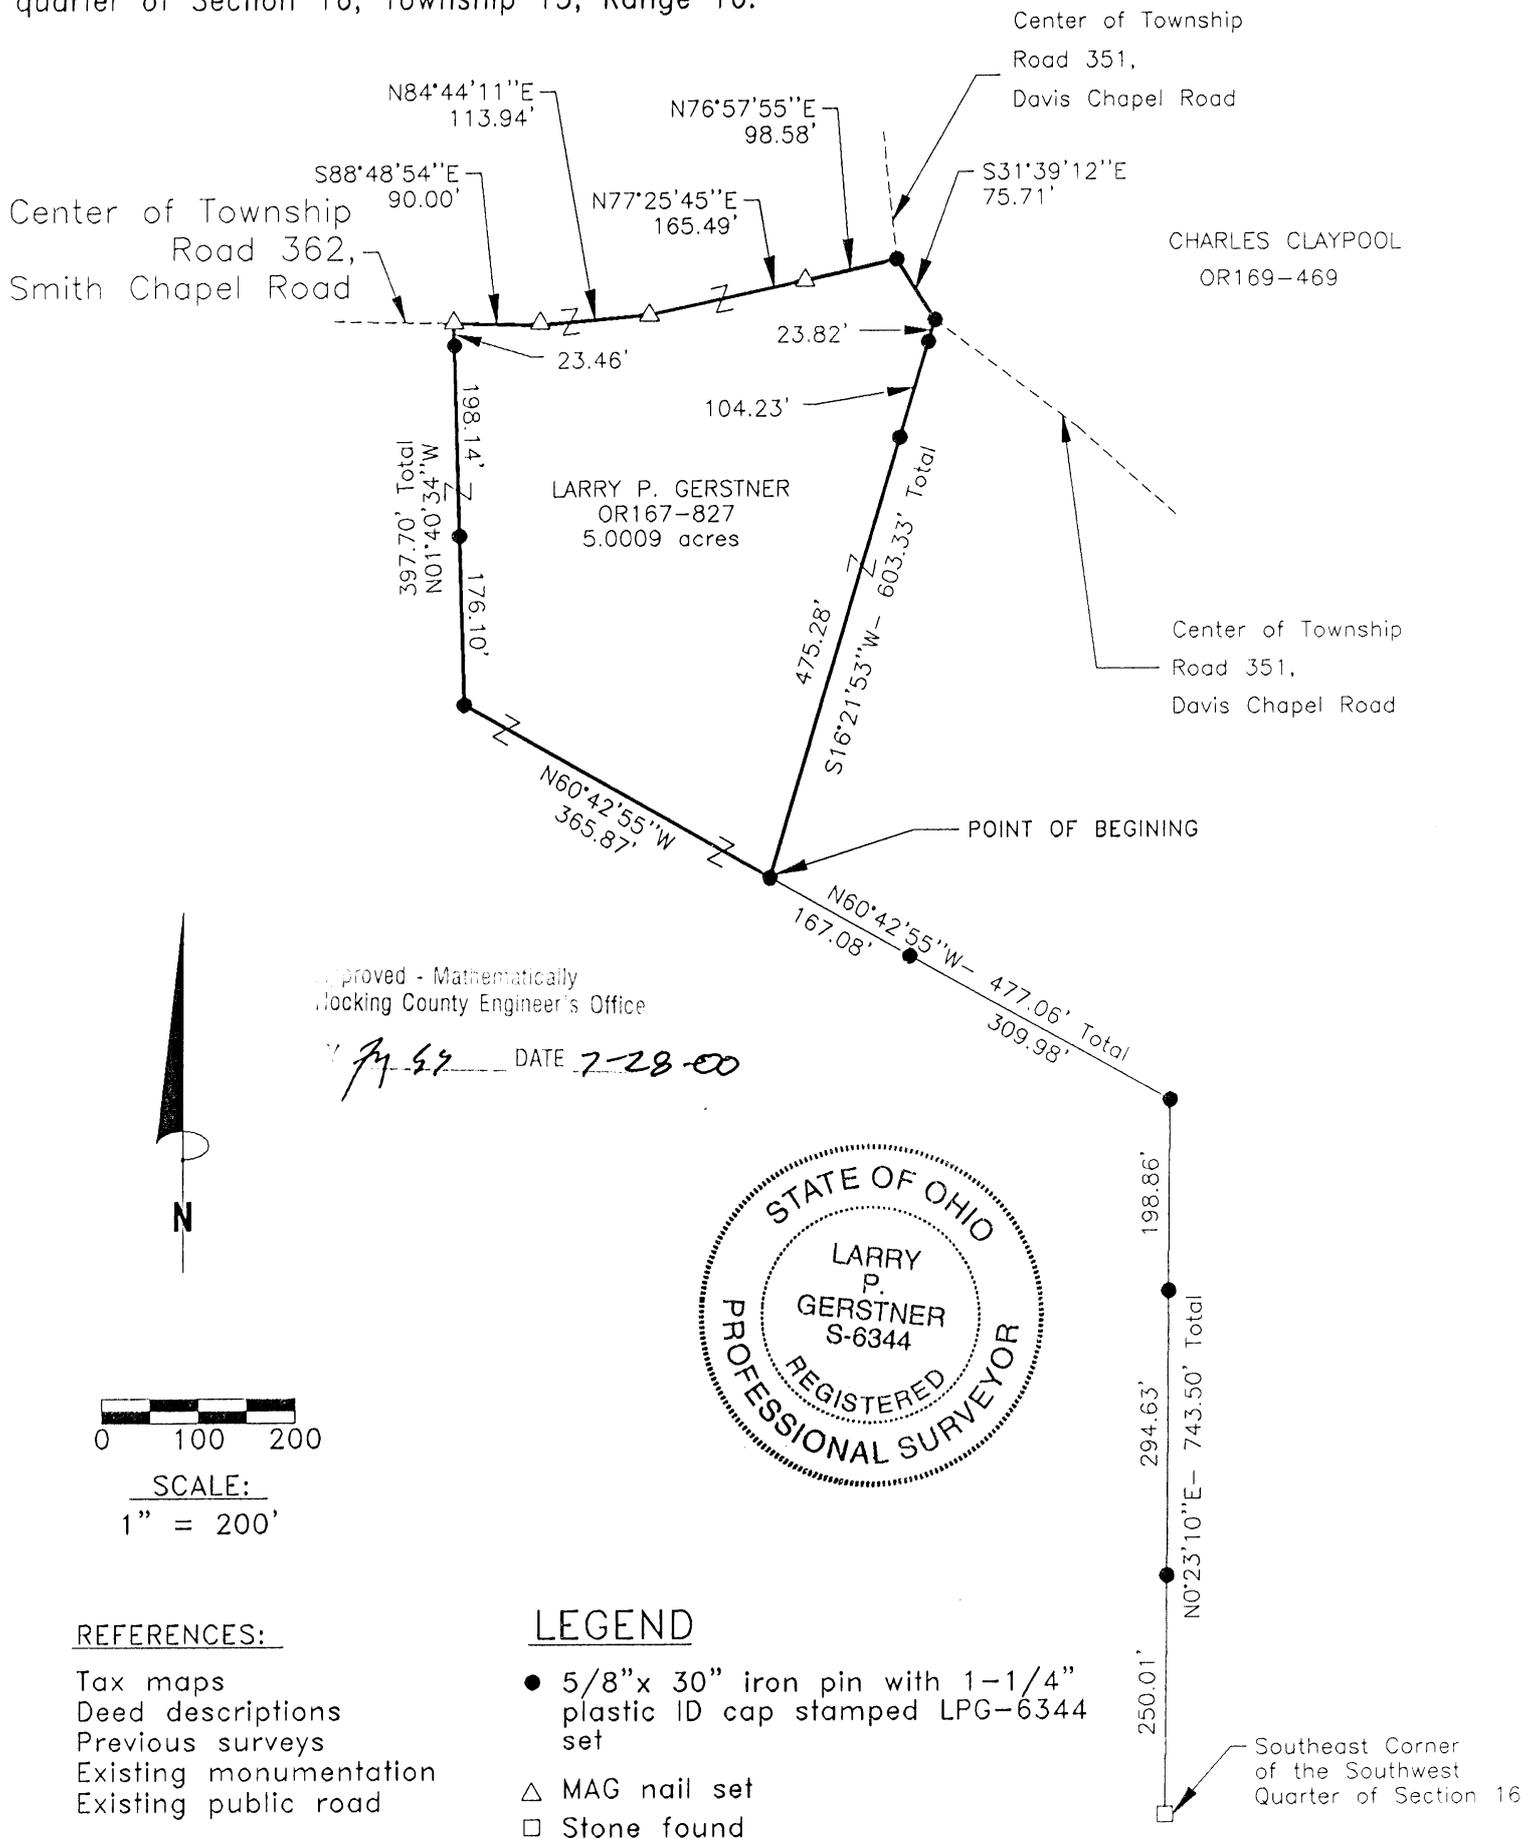

Approved - Mathematically
 Hocking County Engineer's Office

DATE 7-28-00



SCALE:
 1" = 200'



REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.0009 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet; thence North 60 degrees 42 minutes 55 seconds West a distance of 477.06 feet to a 5/8" iron pin set, passing a 5/8" iron pin set at a distance of 309.98 feet, and being the point of **Beginning** of the tract of land to be described;

thence continuing North 60 degrees 42 minutes 55 seconds West a distance of 365.87 feet to a 5/8" iron pin set;

thence North 1 degree 40 minutes 34 seconds West a distance of 397.70 feet to a MAG nail set in the center of Township Road 362, Smith Chapel Road, and passing 5/8" iron pins set at distances of 176.10 feet and 374.24 feet;

thence with the center of said Township Road 362 the following four bearings and distances:

- 1) South 88 degrees 48 minutes 54 seconds East a distance of 90.00 feet to a MAG nail set;
- 2) North 84 degrees 44 minutes 11 seconds East a distance of 113.94 feet to a MAG nail set;
- 3) North 77 degrees 25 minutes 45 seconds East a distance of 165.49 feet to a MAG nail set;
- 4) North 76 degrees 57 minutes 55 seconds East a distance of 98.58 feet to a 5/8" iron pin set in the

intersection of Township Road 351, Davis Chapel Road;

thence leaving the center of said Township Road 359 and with the center of said Township Road 351 South 31 degrees 39 minutes 12 seconds East a distance of 75.71 feet to a 5/8" iron pin set;

thence leaving the center of said Township Road 351 South 16 degrees 21 minutes 53 seconds West a distance of 603.33 feet to the point of beginning, passing 5/8" iron pins set at distances of 23.82 feet and 128.05 feet, containing 5.0009 acres more or less, and subject to the public easements of said Township Roads 362 and 351 and any other public or private easements of record.

The above 5.0009 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.



Approved - Mathematically
Hocking County Engineer's Office

BY MS DATE 7-28-00

A handwritten signature of Larry P. Gerstner, written in black ink over a horizontal line.

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16

PLAT OF A 6.584 ACRE TRACT FOR THE BOY SCOUT PROPERTY

6-584Ac.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

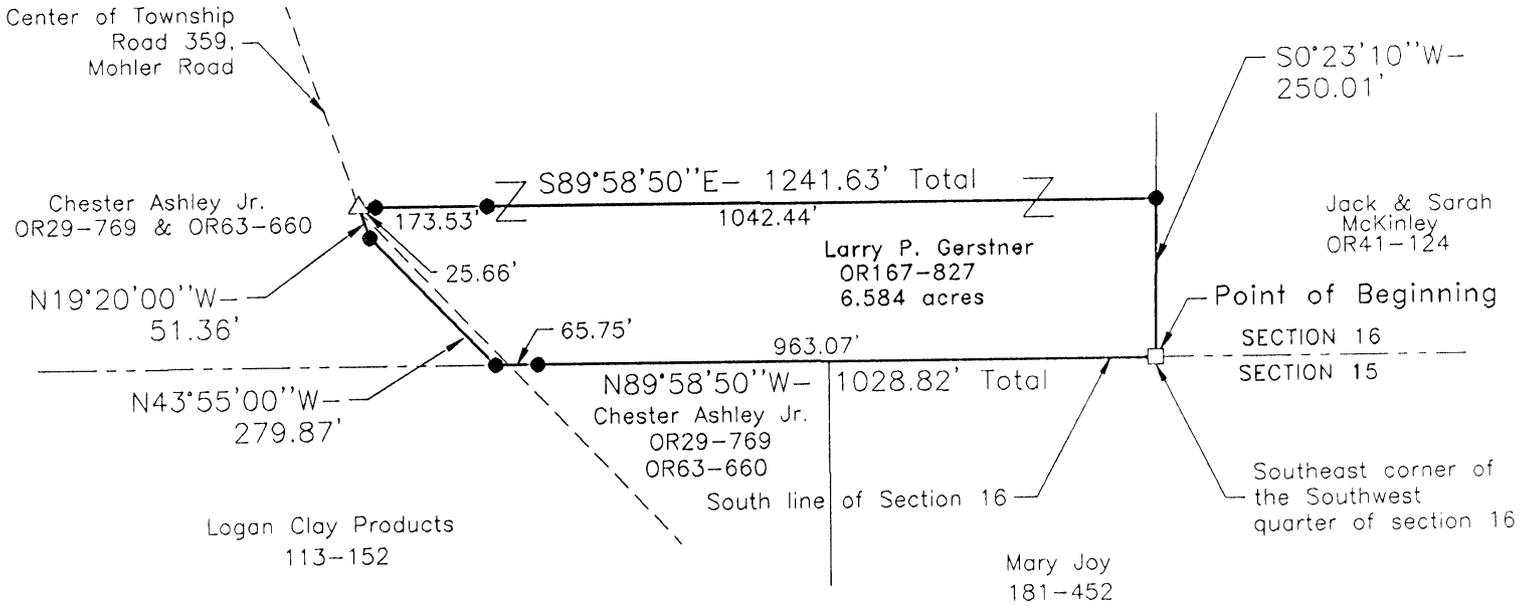


Approved - Mathematically
 Hocking County Engineer's Office
 BY *[Signature]* DATE 8-9-00



REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road



SCALE:
 1" = 300'

LEGEND

- 5/8"x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 6.584 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence with the South line of Section 16 North 89 degrees 58 minutes 50 seconds West a distance of 1028.82 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 963.07 feet;

thence leaving the South line of Section 16 and with the surface of Township Road 359, Mohler Road, the following two bearings and distances:

1) North 43 degrees 55 minutes 00 seconds West a distance of 279.87 feet to a 5/8" iron pin set;

2) North 19 degrees 20 minutes 00 seconds West a distance of 51.36 feet to a MAG nail set;

thence leaving the surface of said Township Road 359 South 89 degrees 58 minutes 50 seconds East a distance of 1241.63 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 25.66 feet and 199.19 feet;

thence South 0 degrees 23 minutes 10 seconds West a distance of 250.01 feet to the point of beginning, containing 6.584 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 6.584 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-9-00


Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

Green 16
12.04 ac.

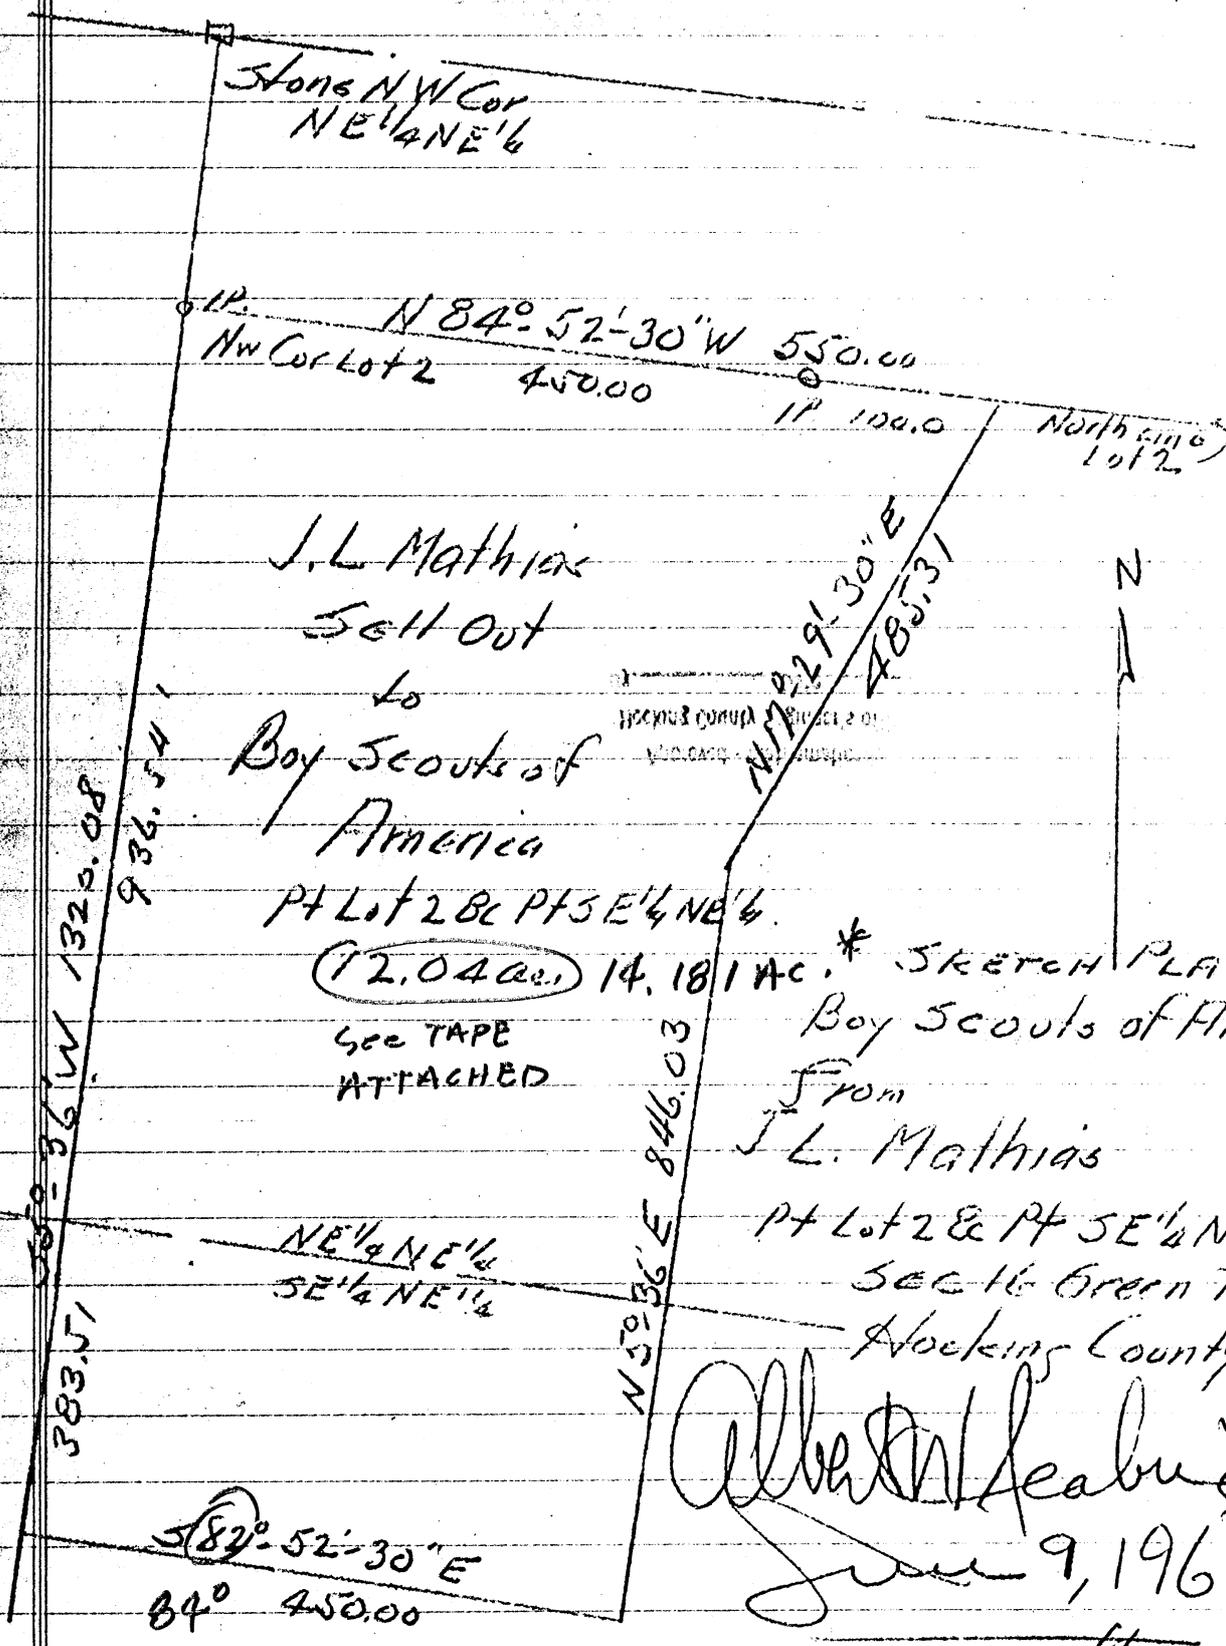

Stone NW Cor
NE 1/4 NE 1/4

IP. N 84° 52' 30" W 550.00
NW Cor Lot 2 450.00

North line
Lot 2

J. L. Mathias
Sell out
to
Boy Scouts of
America
PT Lot 2 & PT SE 1/4 NE 1/4

(12.04 ac.)

14.181 ac.

* SKETCH PLAT
Boy Scouts of America
From
J. L. Mathias

PT Lot 2 & PT SE 1/4 NE 1/4
Sec 16 Green Twp
Hocking County Ohio

Albert W. Seabright
June 9, 1965

383.51
36 W 1320.08
936.54

N 59° 36' E 846.03

S 82° 52' 30" E
450.00

Approved - Mathematically *
Hocking County Engineer's office
By _____ Date _____

Donated, June 1982, by
ALBERT W. SEABRIGHT, P.E., P.S.
COUNTY ENGINEER 1949 - 1964

PLAT OF A 5.0018 ACRE TRACT FOR THE BOY SCOUT PROPERTY

GREEN 16
5.0018 Ac.

Situated in Green Township, Hocking County, Ohio; being part of Northwest quarter of Section 16, Township 13, Range 16.




REFERENCES:


- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ MAG nail set
- Stone found



SCALE:
1" = 200'

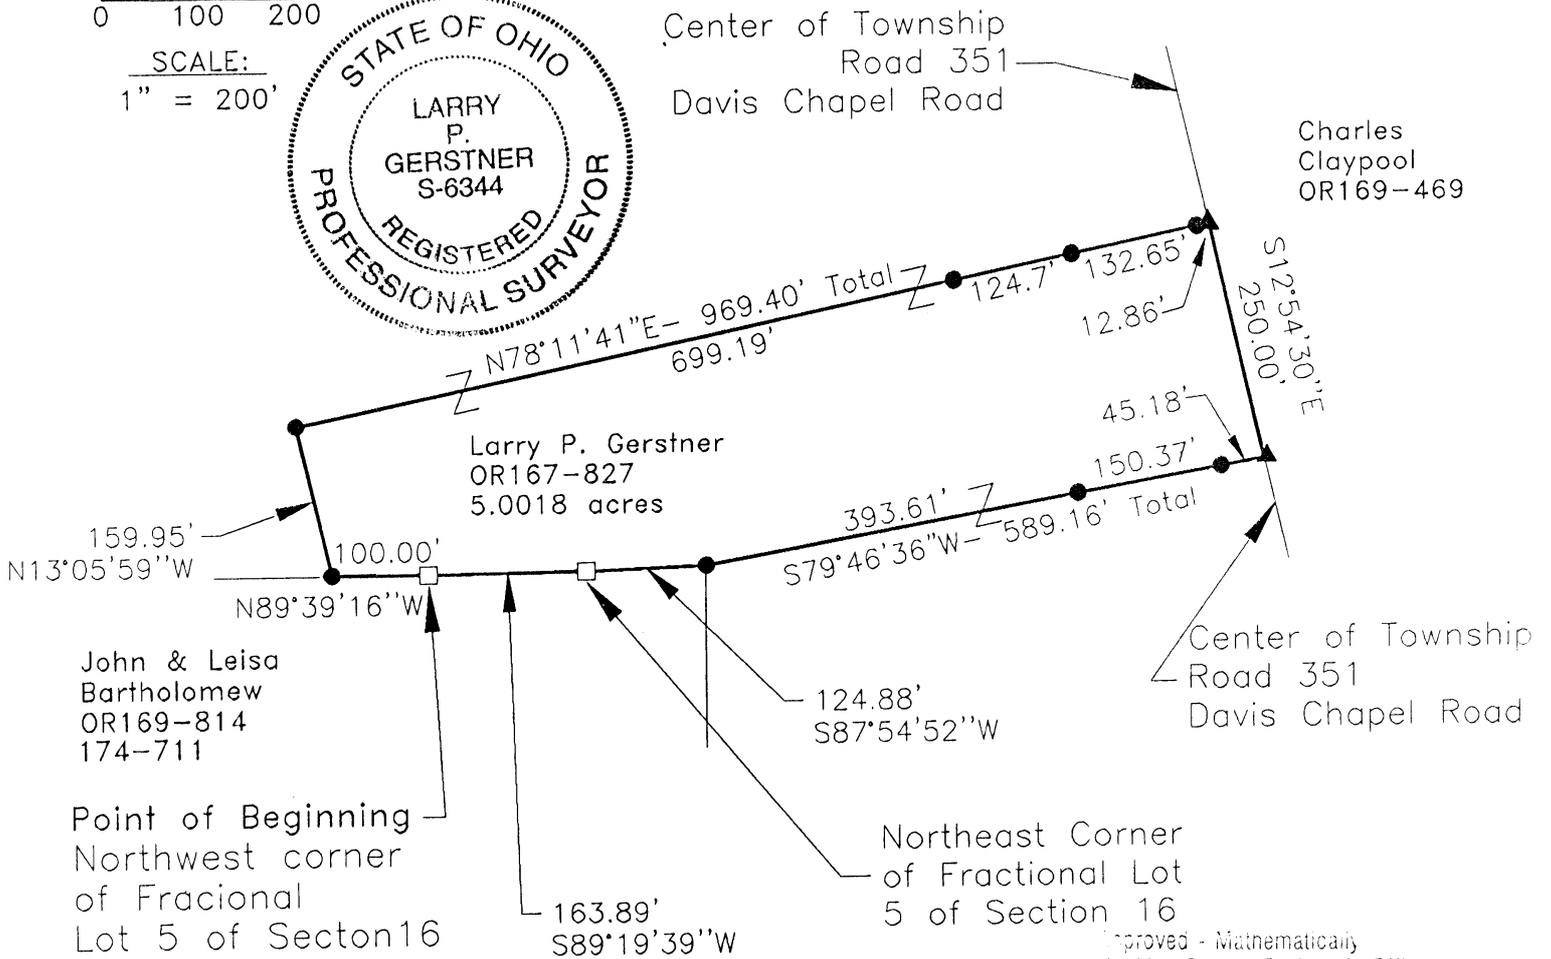

Approved - Mathematically
Hocking County Engineer's Office

JPG DATE 8-29-00

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of August, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0018 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northwest corner of Fractional Lot 5 of Section 16; thence North 89 degrees 39 minutes 16 seconds West a distance of 100.00 feet to a 5/8" iron pin set;

thence North 13 degrees 05 minutes 59 seconds West a distance of 159.95 feet to a 5/8" iron pin set;

thence North 78 degrees 11 minutes 41 seconds East a distance of 969.40 feet to a MAG nail set in the center of Township Road 351, Davis Chapel Road, and passing 5/8" iron pins set at distances of 699.19 feet, 823.89 feet, and 956.54 feet;

thence with the center of said Township Road 351 South 12 degrees 54 minutes 30 seconds East a distance of 250.00 feet to a MAG nail set;

thence leaving the center of said Township Road 351 South 79 degrees 46 minutes 36 seconds West a distance of 589.16 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 45.18 feet and 195.55 feet;

thence South 87 degrees 54 minutes 52 seconds West a distance of 124.88 feet to a stone found at the Northeast corner of said Fractional Lot 5;

thence with the North line of said Fractional Lot 5 South 89 degrees 19 minutes 39 seconds West a distance of 163.89 feet to the point of beginning, containing 5.0018 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 5.0018 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including August 3, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 8-29-00

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

PLAT OF A 12.671 ACRE TRACT FOR THE BOY SCOUT PROPERTY

12.671 ac.

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

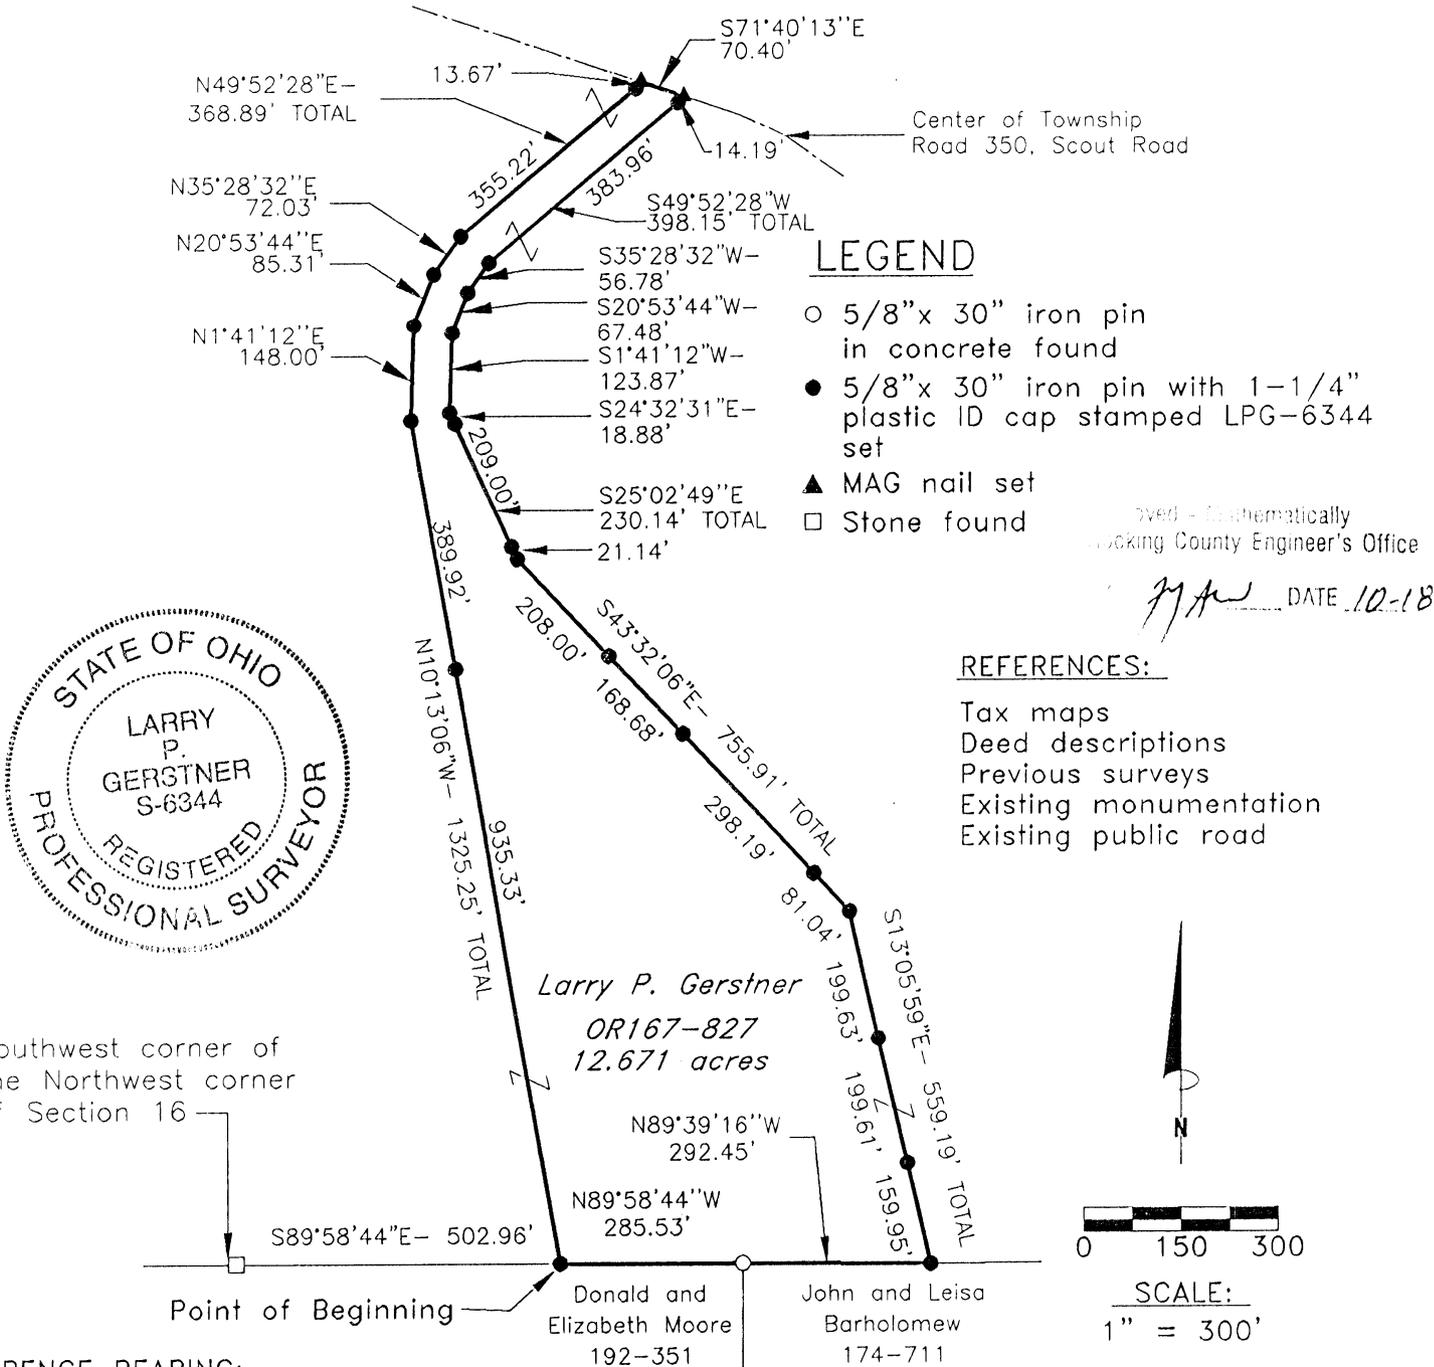

REFERENCE BEARING:

West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 12.671 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence North 89 degrees 58 minutes 44 seconds East a distance of 502.96 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 10 degrees 13 minutes 06 seconds West a distance of 1325.25 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 935.33 feet;

thence North 1 degree 41 minutes 12 seconds East a distance of 148.00 feet to a 5/8" iron pin set;

thence North 20 degrees 53 minutes 44 seconds East a distance of 85.31 feet to a 5/8" iron pin set;

thence North 35 degrees 28 minutes 32 seconds East a distance of 72.03 feet to a 5/8" iron pin set;

thence North 49 degrees 52 minutes 28 seconds East a distance of 368.89 feet to a MAG nail set in the center of Township Road 350, Scout Road, and passing a 5/8" iron pin set at a distance of 355.22 feet;

thence with the center of said Township Road 350 South 71 degrees 40 minutes 13 seconds East a distance of 70.40 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 49 degrees 52 minutes 28 seconds West a distance of 398.15 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 14.19 feet;

thence South 35 degrees 28 minutes 32 seconds West a distance of 56.78 feet to a 5/8" iron pin set;

thence South 20 degrees 53 minutes 44 seconds West a distance of 67.48 feet to a 5/8" iron pin set;

thence South 1 degrees 41 minutes 12 seconds West a distance of 123.87 feet to a 5/8" iron pin set;

thence South 24 degrees 32 minutes 31 seconds East a distance of 18.88 feet to a 5/8" iron pin set;

thence South 25 degrees 02 minutes 49 seconds East a distance of 230.14 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 209.00 feet;

thence South 43 degrees 32 minutes 06 seconds East a distance of 755.91 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 208.00 feet, 376.68 feet, and 674.87 feet;

thence South 13 degrees 05 minutes 59 seconds East a distance of 559.19 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 199.63 feet and 399.24 feet;

thence North 89 degrees 39 minutes 16 seconds West a distance of 292.45 feet to a 5/8" iron pin in concrete found;

thence North 89 degrees 58 minutes 44 seconds West a distance of 285.53 feet to the point of beginning, containing 12.671 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 12.671 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 3, 2000.

Approved - Mathematically
Hocking County Engineer's Office

MAW DATE 10-10-00

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260




GREEN 16


PLAT OF A 5.0025 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0025 Ac

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16.

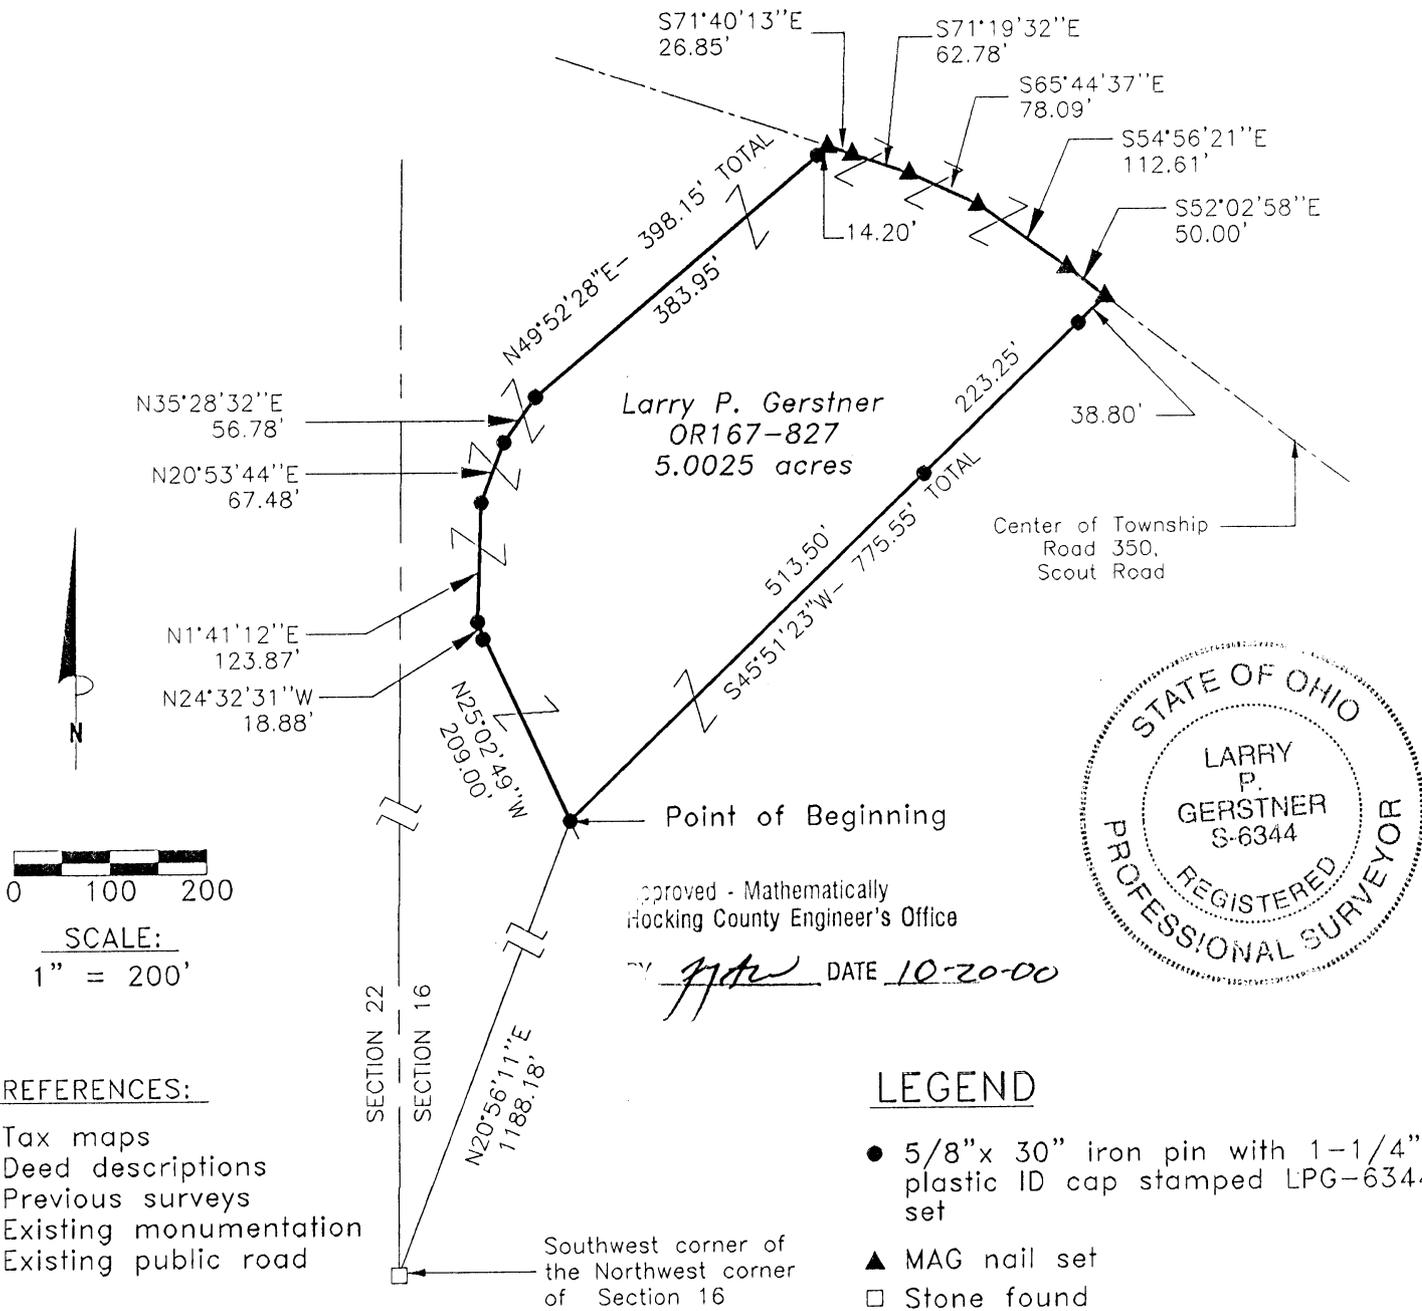

Approved - Mathematically
 Hocking County Engineer's Office
 [Signature] DATE 10-20-00



- REFERENCES:
- Tax maps
 - Deed descriptions
 - Previous surveys
 - Existing monumentation
 - Existing public road

- LEGEND
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
 - ▲ MAG nail set
 - Stone found

REFERENCE BEARING:
 West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:
 I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 3rd day of October, 2000 and that the plat is a correct representation of the premises as described by said survey.

[Signature]
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 5.0025 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest corner of Section 16; thence North 20 degrees 56 minutes 11 seconds East a distance of 1188.18 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 25 degrees 02 minutes 49 seconds West a distance of 209.00 feet to a 5/8" iron pin set;
thence North 24 degrees 32 minutes 31 seconds West a distance of 18.88 feet to a 5/8" iron pin set;
thence North 1 degree 41 minutes 12 seconds East a distance of 123.87 feet to a 5/8" iron pin set;
thence North 20 degrees 53 minutes 44 seconds East a distance of 67.48 feet to a 5/8" iron pin set;
thence North 35 degrees 28 minutes 32 seconds East a distance of 56.78 feet to a 5/8" iron pin set;
thence North 49 degrees 52 minutes 28 seconds East a distance of 398.15 feet to a MAG nail set in the

center of Township Road 350, Scout Road, and passing a 5/8" iron pin set at a distance of 383.95 feet;

thence with the center of said Township Road 350 the following five bearings and distances:

- 1) South 71 degrees 40 minutes 13 seconds East a distance of 26.85 feet to a MAG nail set;
- 2) South 71 degrees 19 minutes 32 seconds East a distance of 62.78 feet to a MAG nail set;
- 3) South 65 degrees 44 minutes 37 seconds East a distance of 78.09 feet to a MAG nail set;
- 4) South 54 degrees 56 minutes 21 seconds East a distance of 112.61 feet to a MAG nail set;
- 5) South 52 degrees 02 minutes 58 seconds East a distance of 50.00 feet to a MAG nail set;

thence leaving the center of said Township Road 350 South 45 degrees 51 minutes 23 seconds West a distance of 775.55 feet to the point of beginning, passing 5/8" iron pins set at distances of 38.80 feet and 262.05 feet, containing 5.0025 acres more or less, and subject to the public easement of said Township Road 350 and any other public or private easements of record.

The above 5.0025 acre survey is intended to describe part of the 168 acre Tract 4 as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 3, 2000.



Approved - Mathematically
Hocking County Engineer's Office

DATE 10-20-00

A handwritten signature of Larry P. Gerstner, written in black ink over a horizontal line.

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
2.090 AC.


PLAT OF A 2.090 ACRE TRACT FOR THE BLUHM FAMILY TRUST

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southeast quarter of Section 16, Township 13, Range 16.



REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

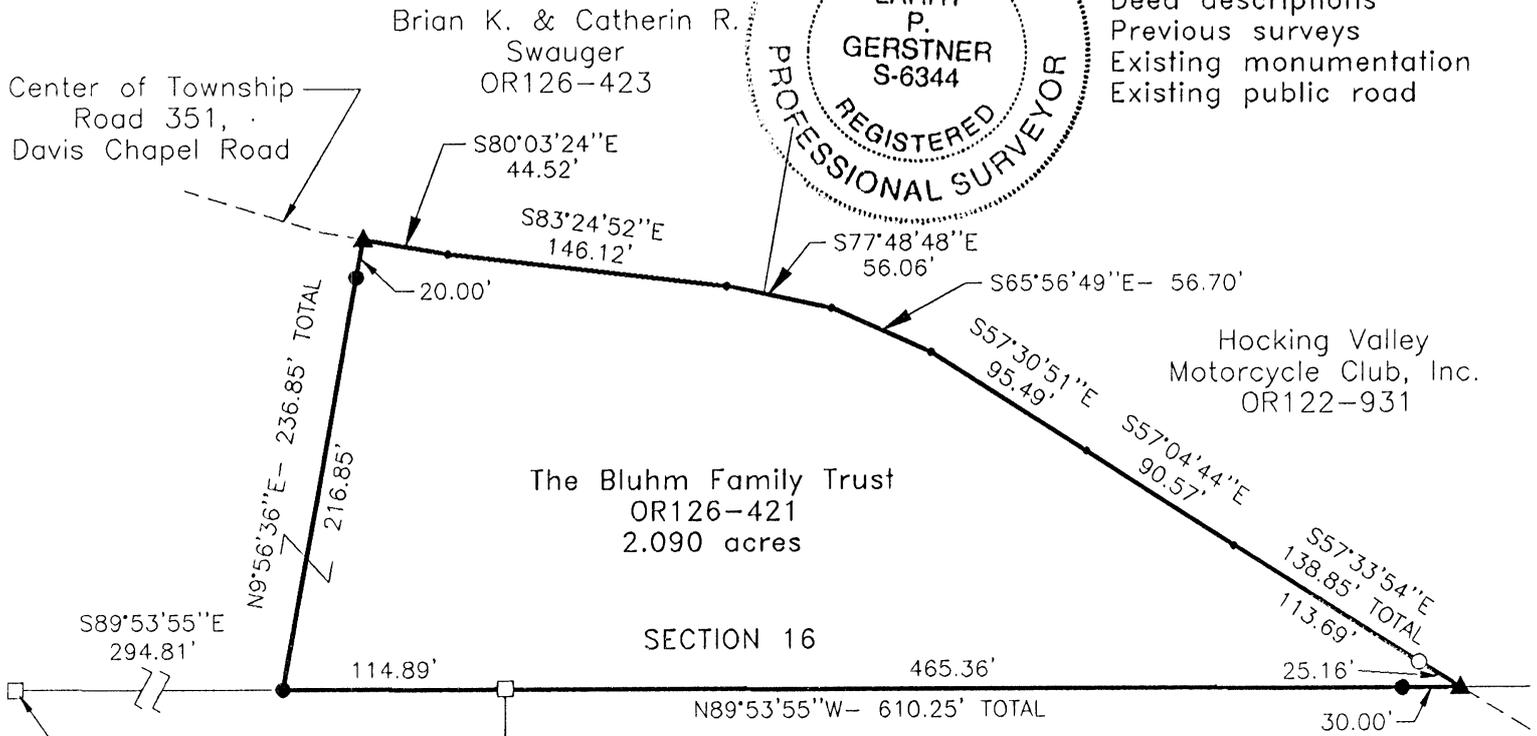

The Bluhm Family Trust
 OR126-421
 2.090 acres


SECTION 16

SECTION 15

Gary & Carol
 Reynolds
 192-637

LEGEND

- Point
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 previously set
- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- ▲ PK nail set
- Stone found



SCALE:
 1" = 100'

Mary Joy
 181-452
 Approved - Mathematically
 Hocking County Engineer's Office

BY JAW DATE 9-4-98

SUBDIVISION REGULATIONS WAIVED
 PENDING HEALTH DEPT. APPROVAL

BY JAW See Deed 11-3-98 DATE 9-4-98

REFERENCE BEARING:

The West line of the East half of the Southeast quarter of Section 16 as North 0 degrees 11 minutes 55 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 2nd day of Septemeber, 1998 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
 Registered Surveyor No. 6344

Survey by: Larry P. Gerstner - Engineering and Surveying
 9 East Second Street, Suite A, Logan, Ohio 43138
 (740) 385-4260

SURVEY DESCRIPTION OF A 2.090 ACRE TRACT FOR THE BLUHM FAMILY TRUST

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southeast quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the East half of the Southeast quarter of Section 16; thence with the South line of Section 16 South 89 degrees 53 minutes 55 seconds East a distance of 294.81 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence leaving the South line of Section 16 North 9 degrees 56 minutes 36 seconds East a distance of 236.85 feet to a PK nail set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 216.85 feet;

thence with the center of said Township Road 351 the following seven bearings and distances:

- 1) South 80 degrees 03 minutes 24 seconds East a distance of 44.52 feet to a point;
- 2) South 83 degrees 24 minutes 52 seconds East a distance of 146.12 feet to a point;
- 3) South 77 degrees 48 minutes 48 seconds East a distance of 56.06 feet to a point;
- 4) South 65 degrees 56 minutes 49 seconds East a distance of 56.70 feet to a point;
- 5) South 57 degrees 30 minutes 51 seconds East a distance of 95.49 feet to a point;
- 6) South 57 degrees 04 minutes 44 seconds East a distance of 90.57 feet to a point;
- 7) South 57 degrees 33 minutes 54 seconds East a distance of 138.85 feet to a PK nail set on the

South line of Section 16 and passing a 5/8" iron pin previously set at a distance of 113.69 feet;

thence leaving the center of said Township Road 351 and with the South line of Section 16 North 89 degrees 53 minutes 55 seconds West a distance of 610.25 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 30.00 feet and a stone found at a distance of 495.36 feet, containing 2.090 acres more or less, and subject to the public easement of said Township Road 351 and any other public or private easements of record.

The above 2.090 acre survey is intended to describe part of the 4.1812 acre surveyed tract as deeded to the Bluhm Family Trust, deed reference Volume OR126, Page 421, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of the East half of the Southeast quarter of Section 16 as North 0 degrees 11 minutes 55 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey or previously set are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on September 2, 1998.



Approved - Mathematically
Hocking County Engineer's Office

BY LPG DATE 9-4-98

A handwritten signature of Larry P. Gerstner in black ink, written over a horizontal line.

SUBDIVISION REGULATIONS WAIVED
PENDING HEALTH DEPT. APPROVAL

BY LPG DATE 9-4-98

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

Green 16
1-2274Ac.

Seymour-Shaw & Associates, Inc.


Consulting Engineers & Surveyors

WILLIAM R. SHAW, P.E.
GEORGE F. SEYMOUR, P.S.

PHONE
614 - 385-4349

615 WALHONDING AVE.
LOGAN, OHIO 43138

BEING A PART OF THE S.W. 1/4
OF THE S.W. 1/4 OF SEC. 16,
GREEN TWP., T-13, R-16,
HOCKING COUNTY, OHIO

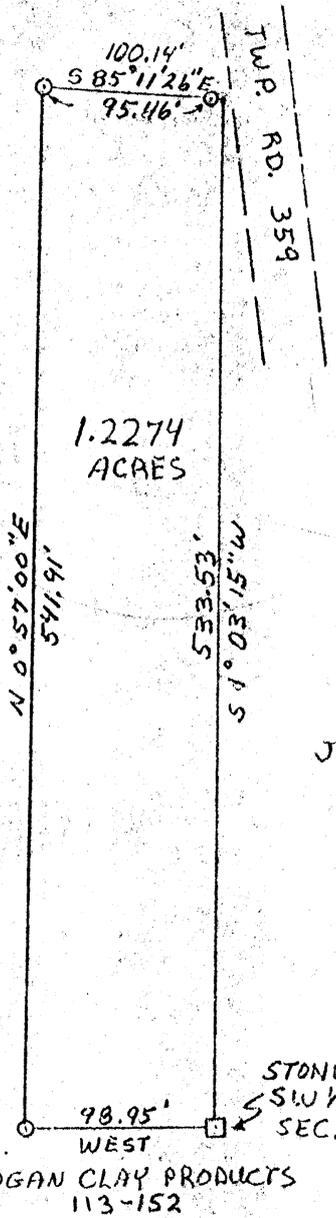

1" = 100'
⊙ = IRON PIN SET
⊠ = STONE

HOMER MOHLER
109-2

JAMES & LAVONA
BLANKENSHIP
151-257


SUBDIVISION REGULATIONS WAIVED *

BY L. Verter DATE 4-9-79

* NOT TO BE USED AS A
separate building site or
transferred as a independant
parcel in the future.

Approved - Mathematically
Hocking County Engineer's Office
By DW RC Date 4-9-79

STONE SE. CORN.
S.W. 1/4 SW 1/4
SEC. 16
LOGAN CLAY PRODUCTS
113-152

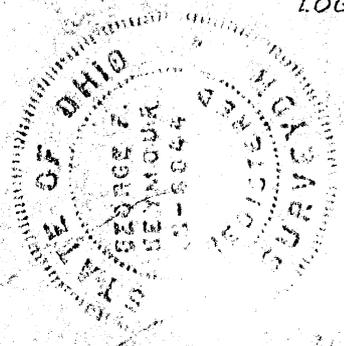

I HEREBY CERTIFY THAT AN ACTUAL SURVEY
WAS MADE UNDER MY SUPERVISION OF THE
PREMISES SHOWN HEREON ON THE 5TH DAY
OF APRIL, 1979. THE PLAT IS A CORRECT
REPRESENTATION OF THE PREMISES AS DETER-
MINED BY SAID SURVEY.

George F. Seymour
REGISTERED SURVEYOR NO. 6044

Seymour-Shaw & Associates, Inc.

Consulting Engineers & Surveyors

WILLIAM R. SHAW, P.E.
GEORGE F. SEYMOUR, P.S.

PHONE
614 - 385-4349

615 WALHONDING AVE.
LOGAN, OHIO 43138

Description of Survey for James Blankenship

Being a part of the southwest quarter of Section 16, T13N, R16W, Green Township, Hocking County, State of Ohio, and more particularly described as follows:

Beginning at a stone found on the southeast corner of the southwest quarter of the southwest quarter of Section 16, T13N, R16W;

Thence with the south line of Section 16, West a distance of 98.95 feet to a 5/8" iron pin;

Thence leaving said section line, North 0° 57' East a distance of 541.91 feet to a 5/8" iron pin;

Thence South 85° 11' 26" East, passing through a 5/8" iron pin set at 95.46 feet, going a total distance of 100.14 feet to a point on the east line of the southwest quarter of the southwest quarter in the right of way of Township Road 359;

Thence with the east line of the southwest quarter of the southwest quarter, South 1° 03' 15" West a distance of 533.53 feet to the place of beginning, containing 1.2274 acres, more or less, subject to all easements and right of ways of record.

The above described tract was surveyed by George F. Seymour, Ohio Registered Surveyor No. 6044, April 5, 1979.

George F. Seymour

Approved - Mathematically
Hocking County Engineer's Office
By Alw Rb Date 4-9-79

SUBDIVISION REGULATIONS WAIVED *


BY J. L. Lester DATE 4-9-79

* NOT TO BE USED AS A
SEPARATE BUILDING SITE OR
TRANSFERRED AS AN INDEPENDENT
PARCEL IN FUTURE.

PLAT OF A 5.0011 ACRE TRACT FOR THE BOY SCOUT PROPERTY

5.0011Ac.

Situated in Green Township, Hocking County, Ohio; being part of East half of the Southwest quarter of Section 16, Township 13, Range 16.

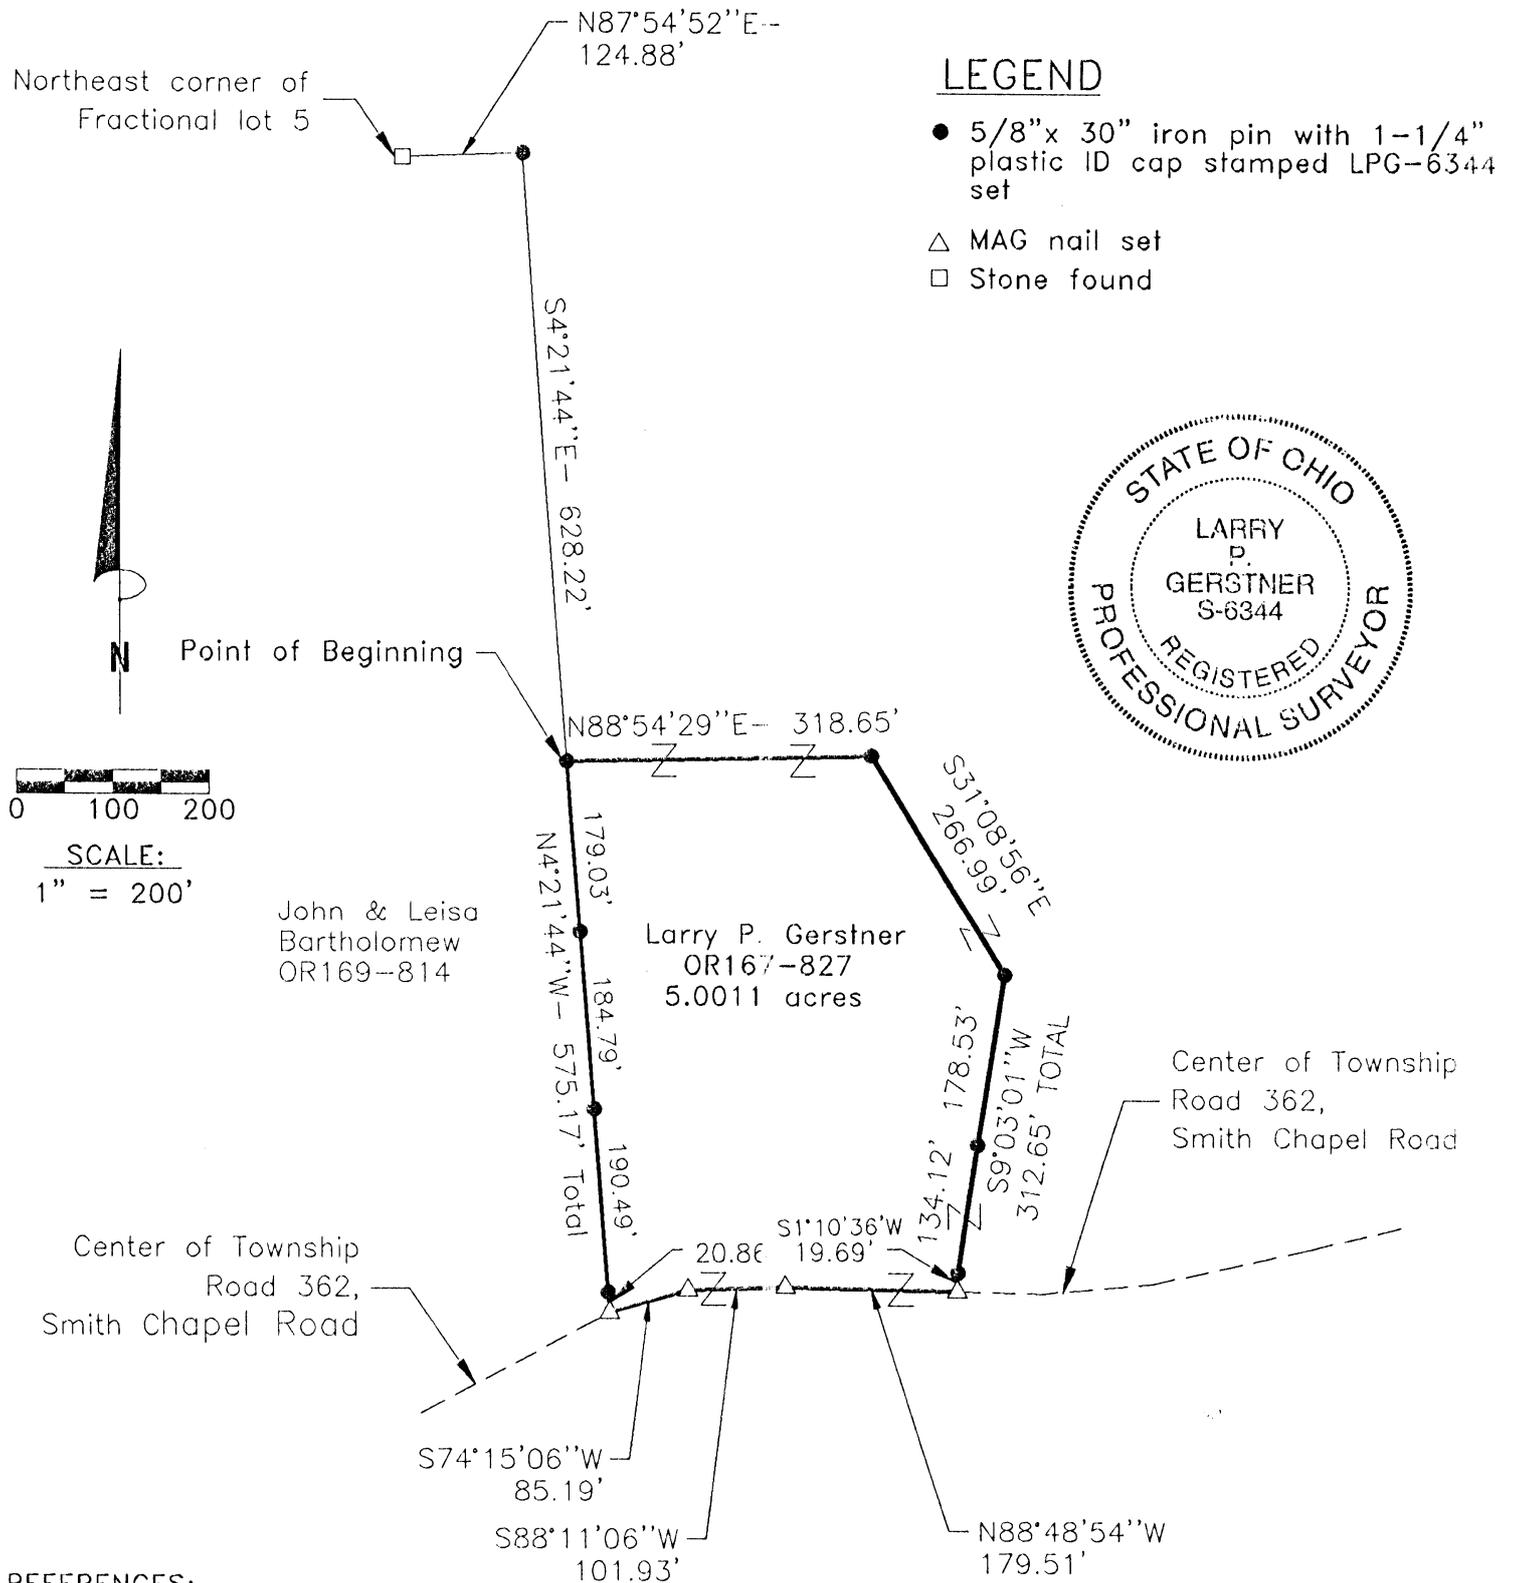

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Approved - Mathematically
Hocking County Engineer's Office

BY L.P.G. DATE 3-20-01
As Revised

CONDITIONAL APPROVAL/
TRANSFER Not to be used as
separate building site or
transferred as an independent
parcel in the future without
Planning Commission and/or
Health Department approval
(As to split Fee)

REFERENCE BEARING:

South line Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 16th day of March, 2001 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0011 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Northeast corner of said Fractional Lot 5; thence North 87 degrees 54 minutes 52 seconds East a distance of 124.88 feet to a 5/8" iron pin set; thence South 4 degrees 21 minutes 44 seconds East a distance of 628.22 feet to a 5/8" iron pin set and being the point of **Beginning** of the tract of land to be described;

thence North 88 degrees 54 minutes 29 seconds East a distance of 318.65 feet to a 5/8" iron pin set; thence South 31 degrees 08 minutes 56 seconds East a distance of 266.99 feet to a 5/8" iron pin set; thence South 9 degrees 03 minutes 01 second West a distance of 312.65 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 178.53 feet;

thence South 1 degree 10 minutes 36 seconds West a distance of 19.69 feet to a MAG nail set in the center of Township Road 362, Smith Chapel Road;

thence with the center of said Township Road 362 the following three bearings and distances:

- 1) North 88 degrees 48 minutes 54 seconds West a distance of 179.51 feet to a MAG nail set;
- 2) South 88 degrees 11 minutes 06 seconds West a distance of 101.93 feet to a MAG nail set;
- 3) South 74 degrees 15 minutes 06 seconds West a distance of 85.19 feet to a MAG nail set;

thence leaving the center of said Township Road 362 North 4 degrees 21 minutes 44 seconds West a distance of 575.17 feet to the point of beginning, passing 5/8" iron pins set at distances of 20.86 feet, 211.35 feet, and 396.14 feet, containing 5.0011 acres more or less, and subject to the public easement of said Township Road 362 and any other public or private easements of record.

The above 5.0011 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, up to and including March 16, 2001.

Approved - Mathematically
Hocking County Engineer's Office

BY *LPG* DATE 3-20-01

Larry P. Gerstner



CONDITIONAL APPROVAL/
TRANSFER Not to be used as
separate building site or
transferred as an independent
parcel in the future without
Planning Commission and/or
Health Department approval
(As to split Fee)


Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

ALBERT W SEASHRIGHT
S.D. No. 1001622
LOGAN, OHIO

GREEN 16
FROM RECORD
OF SURVEYS BOOK
#1 PAGE 398+399
HOCKING COUNTY
ENGINEERS
OFFICE

8.08 Ac.
3.96 Ac.

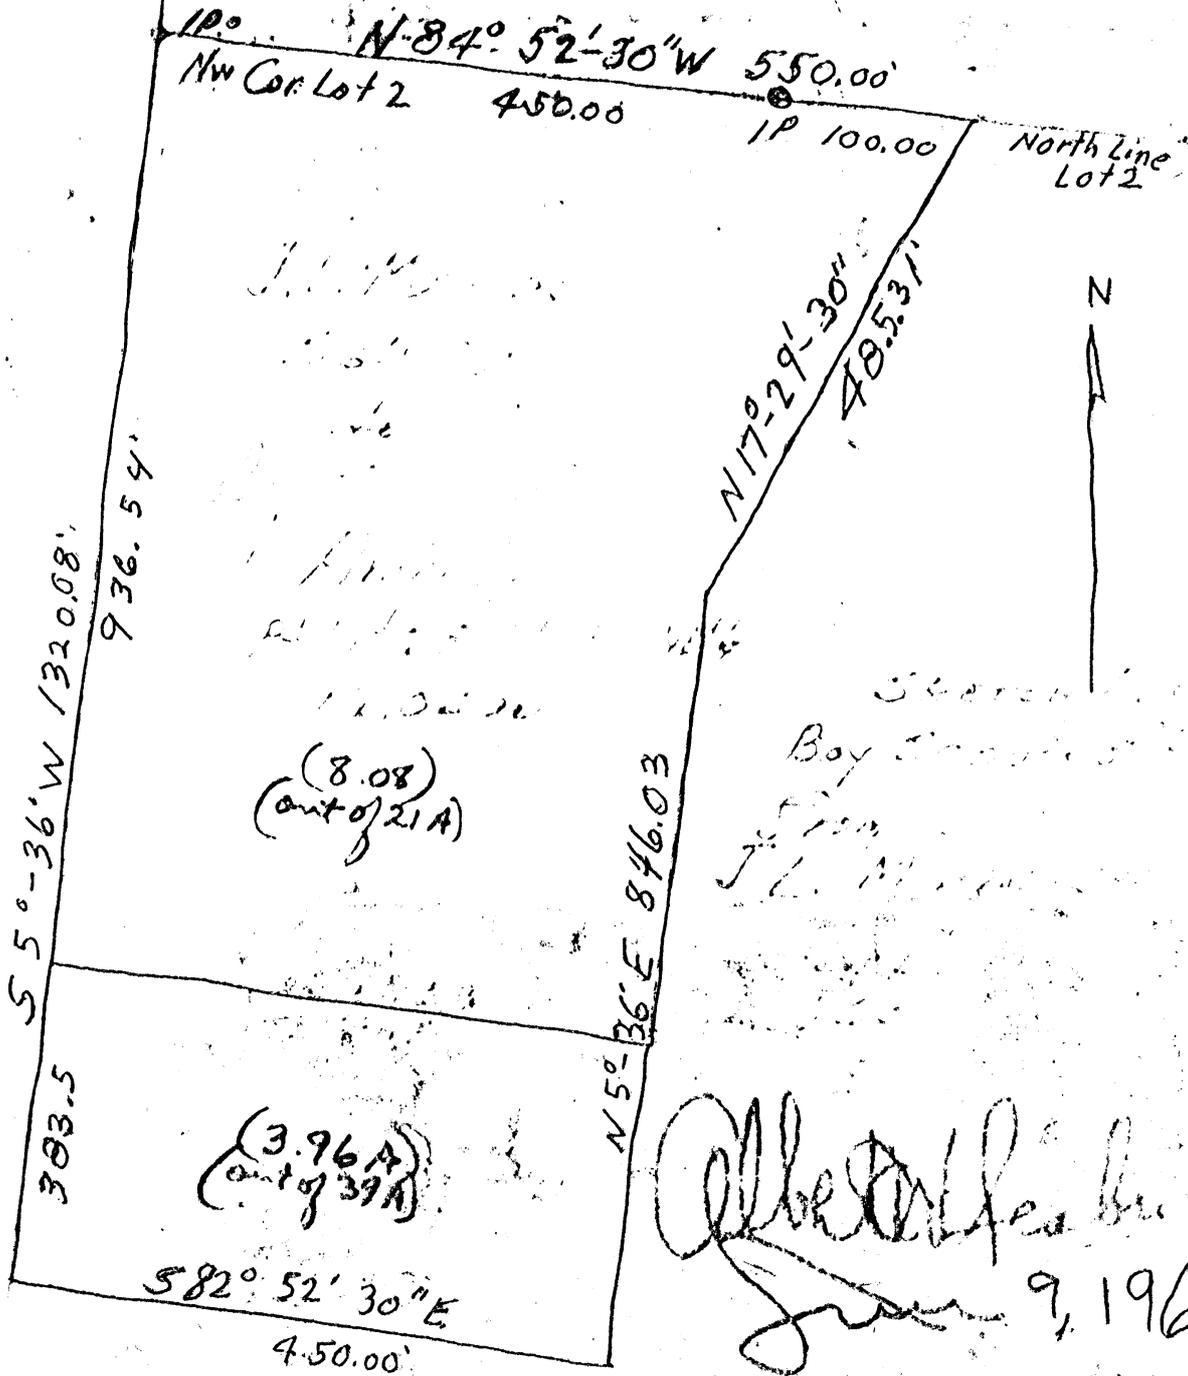

Albert W Seashright
June 9, 1965

Lot 2 and the NE 1/4, Sec. 16, 1965

Set out to Boy Scouts of America

... part of Lot 2 and the Southeast quarter of the Nor-
theast quarter, Section 16, Green Township, T13N, R16W, Hocking

County, State of Ohio, and further described as beginning at

... in the northwest corner of said Lot 2, and being

... 5 degrees - 00 minutes West 430.80 feet from the stone

... the northwest corner of the northeast quarter of the

... northeast quarter of said Section 16; thence South 5 degrees -

06 minutes West 1320.08 feet on the west line of said Lot 2

... 083.51 feet into the said southeast quarter of the northeast

... quarter of Section 16; thence South 84 degrees - 52 minutes -

... seconds East 450 feet to a point; thence North 5 degrees -

... 00 minutes East 846.03 feet to a point; thence North 17 degrees -

... 00 minutes - 30 seconds East 485.31 feet to a point; thence North


... 17 degrees - 52 minutes - 30 seconds West 550.0 feet to the place

... beginning, and passing an iron pin at 100.0 feet, containing

... more or less

PLAT OF A 5.0007 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16.

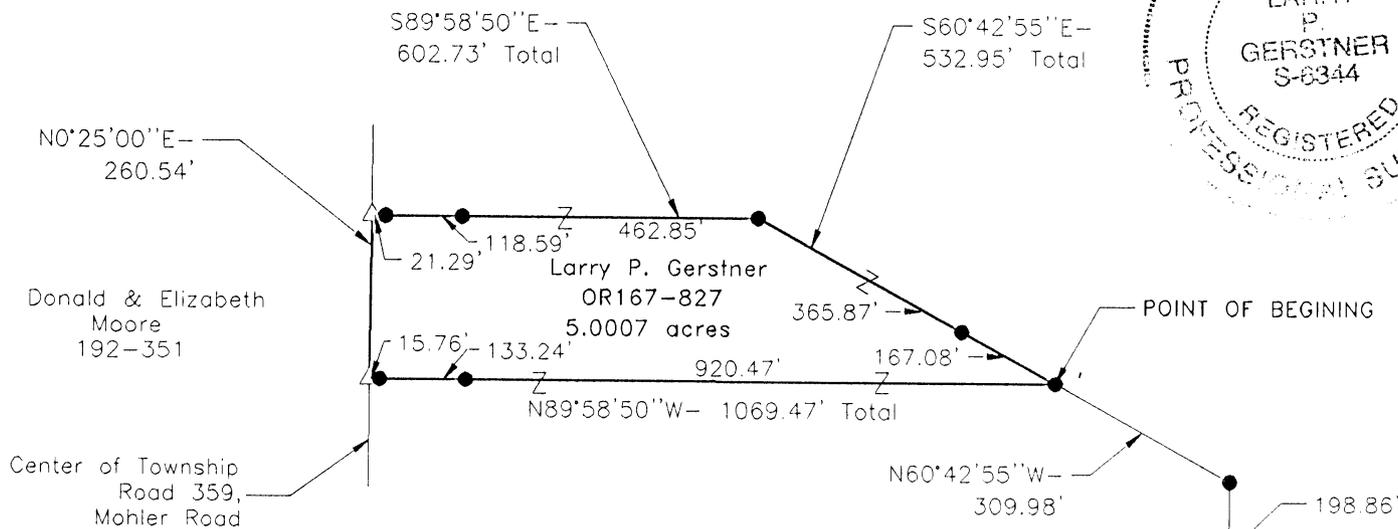

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found

Approved - Mathematically
Hocking County Engineer's Office

BY FN, SS, CW DATE 2-27-03
As Revised

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Southeast corner of the
Southwest quarter
of Section 16



SCALE:

1" = 300'

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0007 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet; thence North 60 degrees 42 minutes 55 seconds West a distance of 309.98 feet to a 5/8" iron pin set, and being the point of **B**eginning of the tract of land to be described;

thence North 89 degrees 58 minutes 50 seconds West a distance of 1069.47 feet to a MAG nail set in the surface of Township Road 359, Mohler Road, and passing 5/8" iron pins set at distances of 920.47 feet and 1053.71 feet;

thence with the surface of said Township Road 359 North 0 degrees 25 minutes 00 seconds East a distance of 260.54 feet to a MAG nail set;

thence leaving the surface of said Township Road 359 South 89 degrees 58 minutes 50 seconds East a distance of 602.73 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 21.29 feet and 139.88 feet;

thence South 60 degrees 42 minutes 55 seconds East a distance of 532.95 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 365.87 feet, containing 5.0007 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 5.0007 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mechanically
Hocking County Engineer's Office

BY 7449 DATE 7-28-00

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

GREEN 16
5.0007A

PLAT OF A 5.0007 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio, being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16.

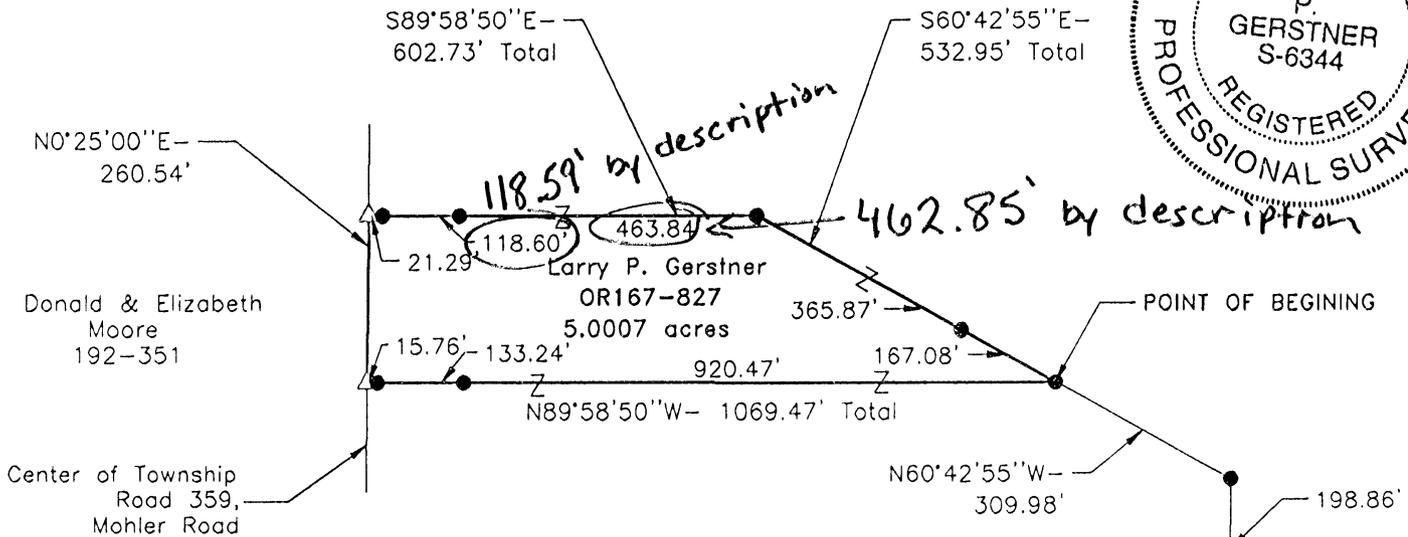

LEGEND

- 5/8" x 30" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- △ MAG nail set
- Stone found


Approved - Mathematically
Hocking County Engineer's Office

BY MJS DATE 7-28-00
* See Revised

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

Southeast corner of the Southwest quarter of Section 16

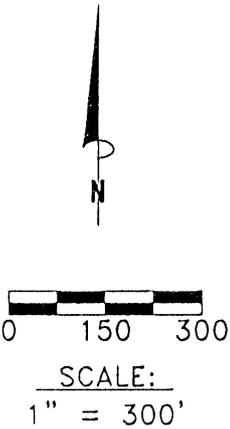

REFERENCE BEARING:

South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 20th day of June, 2000 and that the plat is a correct representation of the premises as described by said survey.

Larry P. Gerstner
Registered Surveyor No. 6344

Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

SURVEY DESCRIPTION OF A 5.0007 ACRE TRACT FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the East half of the Southwest quarter of Section 16, Township 13, Range 16; and being more particularly described as follows:

Commencing for reference at a stone found at the Southeast corner of the Southwest quarter of Section 16; thence North 0 degrees 23 minutes 10 seconds East a distance of 743.50 feet to a 5/8" iron pin set, passing 5/8" iron pins set at distances of 250.01 feet and 544.64 feet; thence North 60 degrees 42 minutes 55 seconds West a distance of 309.98 feet to a 5/8" iron pin set, and being the point of **Beginning** of the tract of land to be described;

thence North 89 degrees 58 minutes 50 seconds West a distance of 1069.47 feet to a MAG nail set in the surface of Township Road 359, Mohler Road, and passing 5/8" iron pins set at distances of 920.47 feet and 1053.71 feet;

thence with the surface of said Township Road 359 North 0 degrees 25 minutes 00 seconds East a distance of 260.54 feet to a MAG nail set;

thence leaving the surface of said Township Road 359 South 89 degrees 58 minutes 50 seconds East a distance of 602.73 feet to a 5/8" iron pin set and passing 5/8" iron pins set at distances of 21.29 feet and 139.88 feet;

thence South 60 degrees 42 minutes 55 seconds East a distance of 532.95 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 365.87 feet, containing 5.0007 acres more or less, and subject to the public easement of said Township Road 359 and any other public or private easements of record.

The above 5.0007 acre survey is intended to describe part of the 82.68 acre Tract Two as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the South line of Section 16 as North 89 degrees 58 minutes 50 seconds West. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on June 20, 2000.

Approved - Mathematically
Hocking County Engineer's Office

BY 7469 DATE 7-28-00

Larry P. Gerstner




Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

CENTERLINE PLAT OF A 999.99 FEET LONG BY 30 FEET WIDE
 EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16.

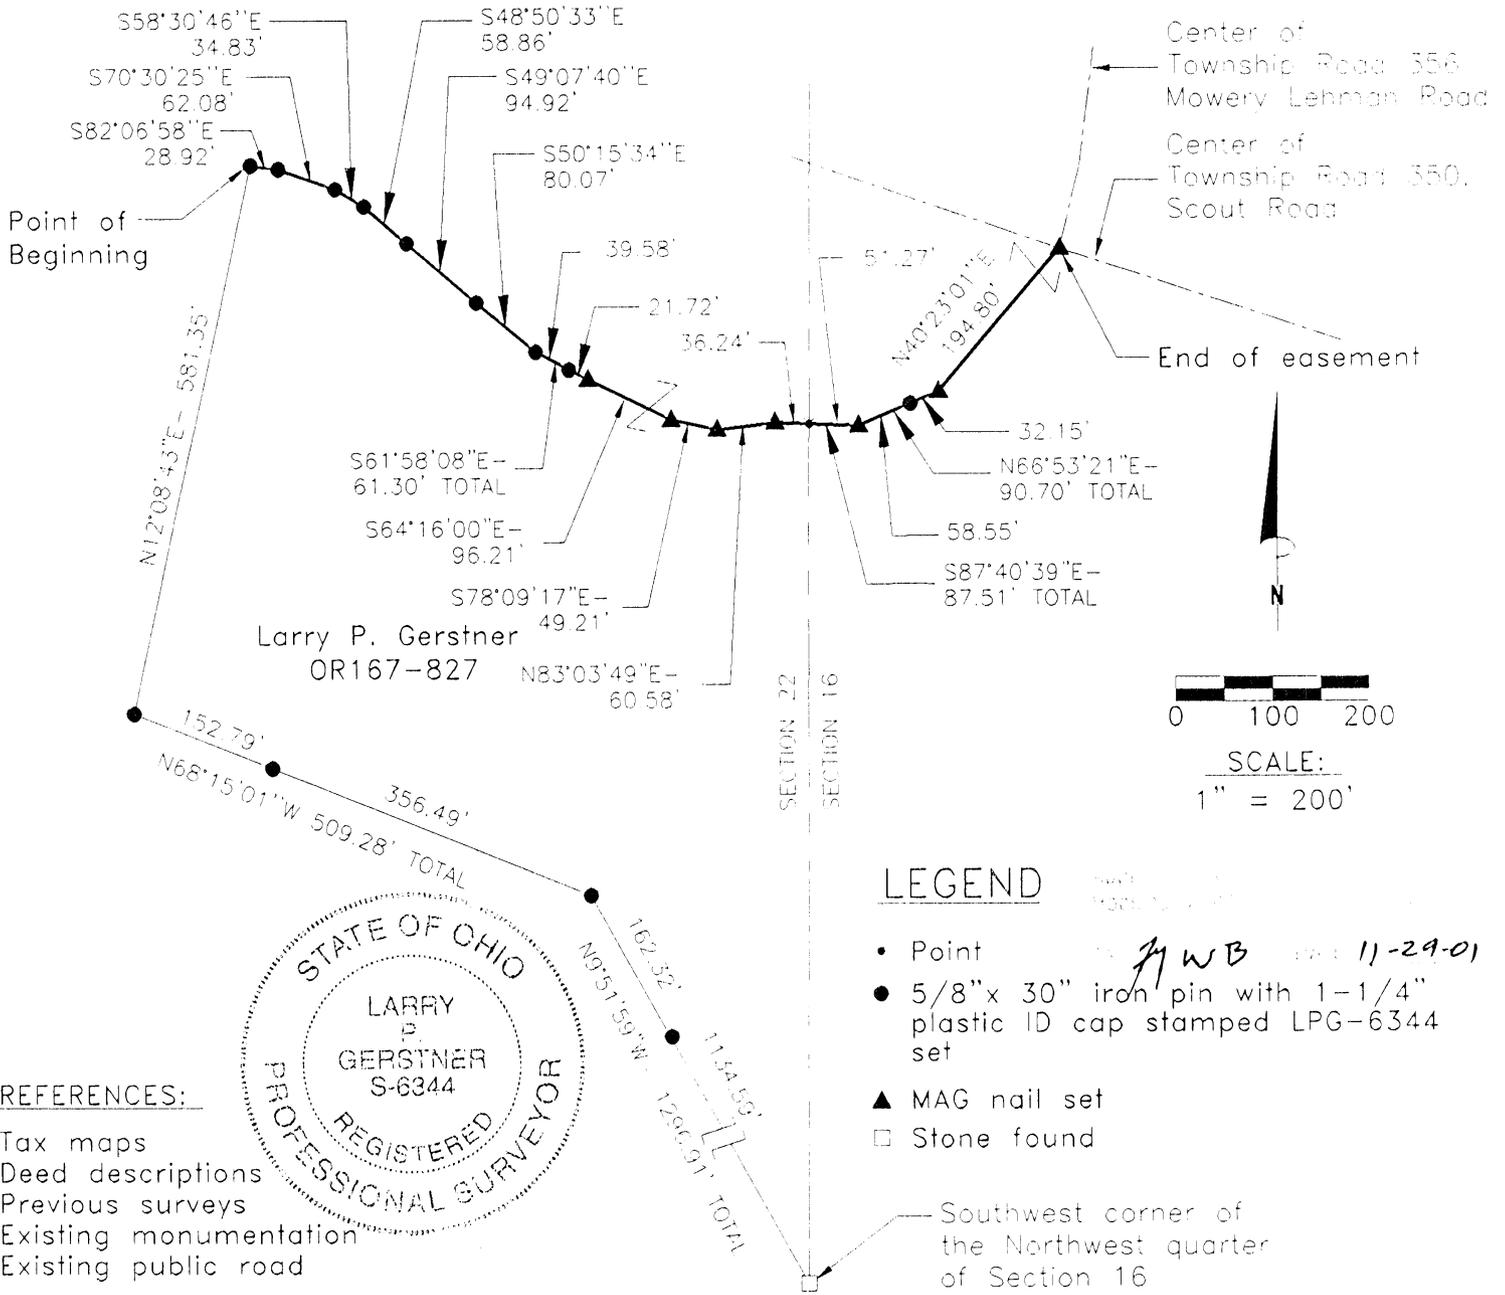

Larry P. Gerstner
 Registered Surveyor No. 6344

CENTERLINE SURVEY DESCRIPTION OF A 999.99 FEET LONG BY 30 FEET WIDE

EASEMENT OF INGRESS AND EGRESS FOR THE BOY SCOUT PROPERTY

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16 and part of the Northeast quarter of Section 22, both of Township 13, Range 16; being a 999.99 feet long by 30 feet wide centerline easement of ingress and egress; and being more particularly described as follows:

Commencing for reference at a stone found at the Southwest corner of the Northwest quarter of Section 16; thence going into Section 22 North 9 degrees 51 minutes 59 seconds West a distance of 1296.91 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 1134.59 feet; thence North 68 degrees 15 minutes 01 second West a distance of 509.28 feet to a 5/8" iron pin set and passing a 5/8" iron pin set at a distance of 356.49 feet; thence North 12 degrees 08 minutes 43 seconds East a distance of 581.35 feet to a 5/8" iron pin set and being the point of **Beginning** of the centerline easement of ingress and egress to be described;

thence South 82 degrees 06 minutes 58 seconds East a distance of 28.92 feet to a 5/8" iron pin set;
thence South 70 degrees 30 minutes 25 seconds East a distance of 62.08 feet to a 5/8" iron pin set;
thence South 58 degrees 30 minutes 46 seconds East a distance of 34.83 feet to a 5/8" iron pin set;
thence South 48 degrees 50 minutes 33 seconds East a distance of 58.86 feet to a 5/8" iron pin set;
thence South 49 degrees 07 minutes 40 seconds East a distance of 94.92 feet to a 5/8" iron pin set;
thence South 50 degrees 15 minutes 34 seconds East a distance of 80.07 feet to a 5/8" iron pin set;
thence South 61 degrees 58 minutes 08 seconds East a distance of 61.30 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 39.58 feet;

thence South 64 degrees 16 minutes 00 seconds East a distance of 96.21 feet to a MAG nail set;
thence South 78 degrees 09 minutes 17 seconds East a distance of 49.21 feet to a MAG nail set;
thence North 83 degrees 03 minutes 49 seconds East a distance of 60.58 feet to a MAG nail set;
thence South 87 degrees 40 minutes 39 seconds East a distance of 87.51 feet to a MAG nail set and passing into Section 16 at a distance of 36.24 feet;


thence North 66 degrees 53 minutes 21 seconds East a distance of 90.70 feet to a MAG nail set and passing a 5/8" iron pin set at a distance of 58.55 feet;

thence North 40 degrees 23 minutes 01 second East a distance of 194.80 feet to a MAG nail set in the intersection of Township Road 350, Scout Road, and Township Road 356, Mowery Lehman Road, being the end of a 999.99 feet long by 30 feet wide easement of ingress and egress, and subject to the public easements of said Township Roads 350 and 356 and any other public or private easements of record.

The above centerline easement of ingress and egress survey is intended to describe part of the 168 acre Tract 4 and part of the 165 acre Tract 7, both as deeded to Larry P. Gerstner by deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the West line of Section 16 as North 0 degrees 13 minutes 23 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on October 18, 2000.

Approved by
Hocking County Recorder

BY FN 40 DATE 11-29-01

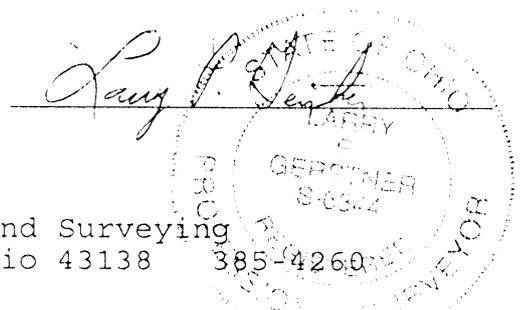

Survey by:


Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

George F. Seymour

830 West Hunter Street
 Logan, Ohio 43138
 740-385-4349
 FAX: 740-385-5954


**SURVEYING
 MAPPING**

email: seysurv@hocking.net

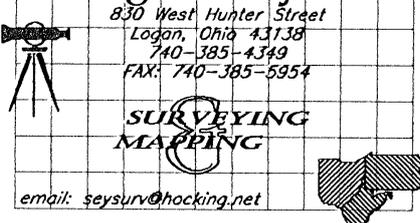

PLAT OF SURVEY

SITUATED IN THE STATE OF OHIO,
 COUNTY OF HOCKING
 TOWNSHIP OF GREEN,
 SECTION 16, IN THE SW 1/4, FRAC.
 LOT 6 PT.
 T-13-N, R-16-W

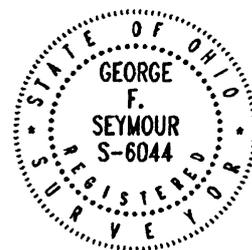

Green Twp., Sec. 16, 23.4919 Ac.


FOR: **DONALD MOORE**

JOB #:
616092

DRAWN BY:
GFS

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM AN ACTUAL FIELD SURVEY OF THE PREMISES IN MAY OF 2009 AND FROM EXISTING PUBLIC RECORDS AND THAT SAID PLAT CORRECTLY SHOWS THE LIMITS OF THE PARCEL TO BE CONVEYED.

THIS CERTIFICATION WAS MADE BY ME ON THIS 14th DAY OF MAY, 2009.

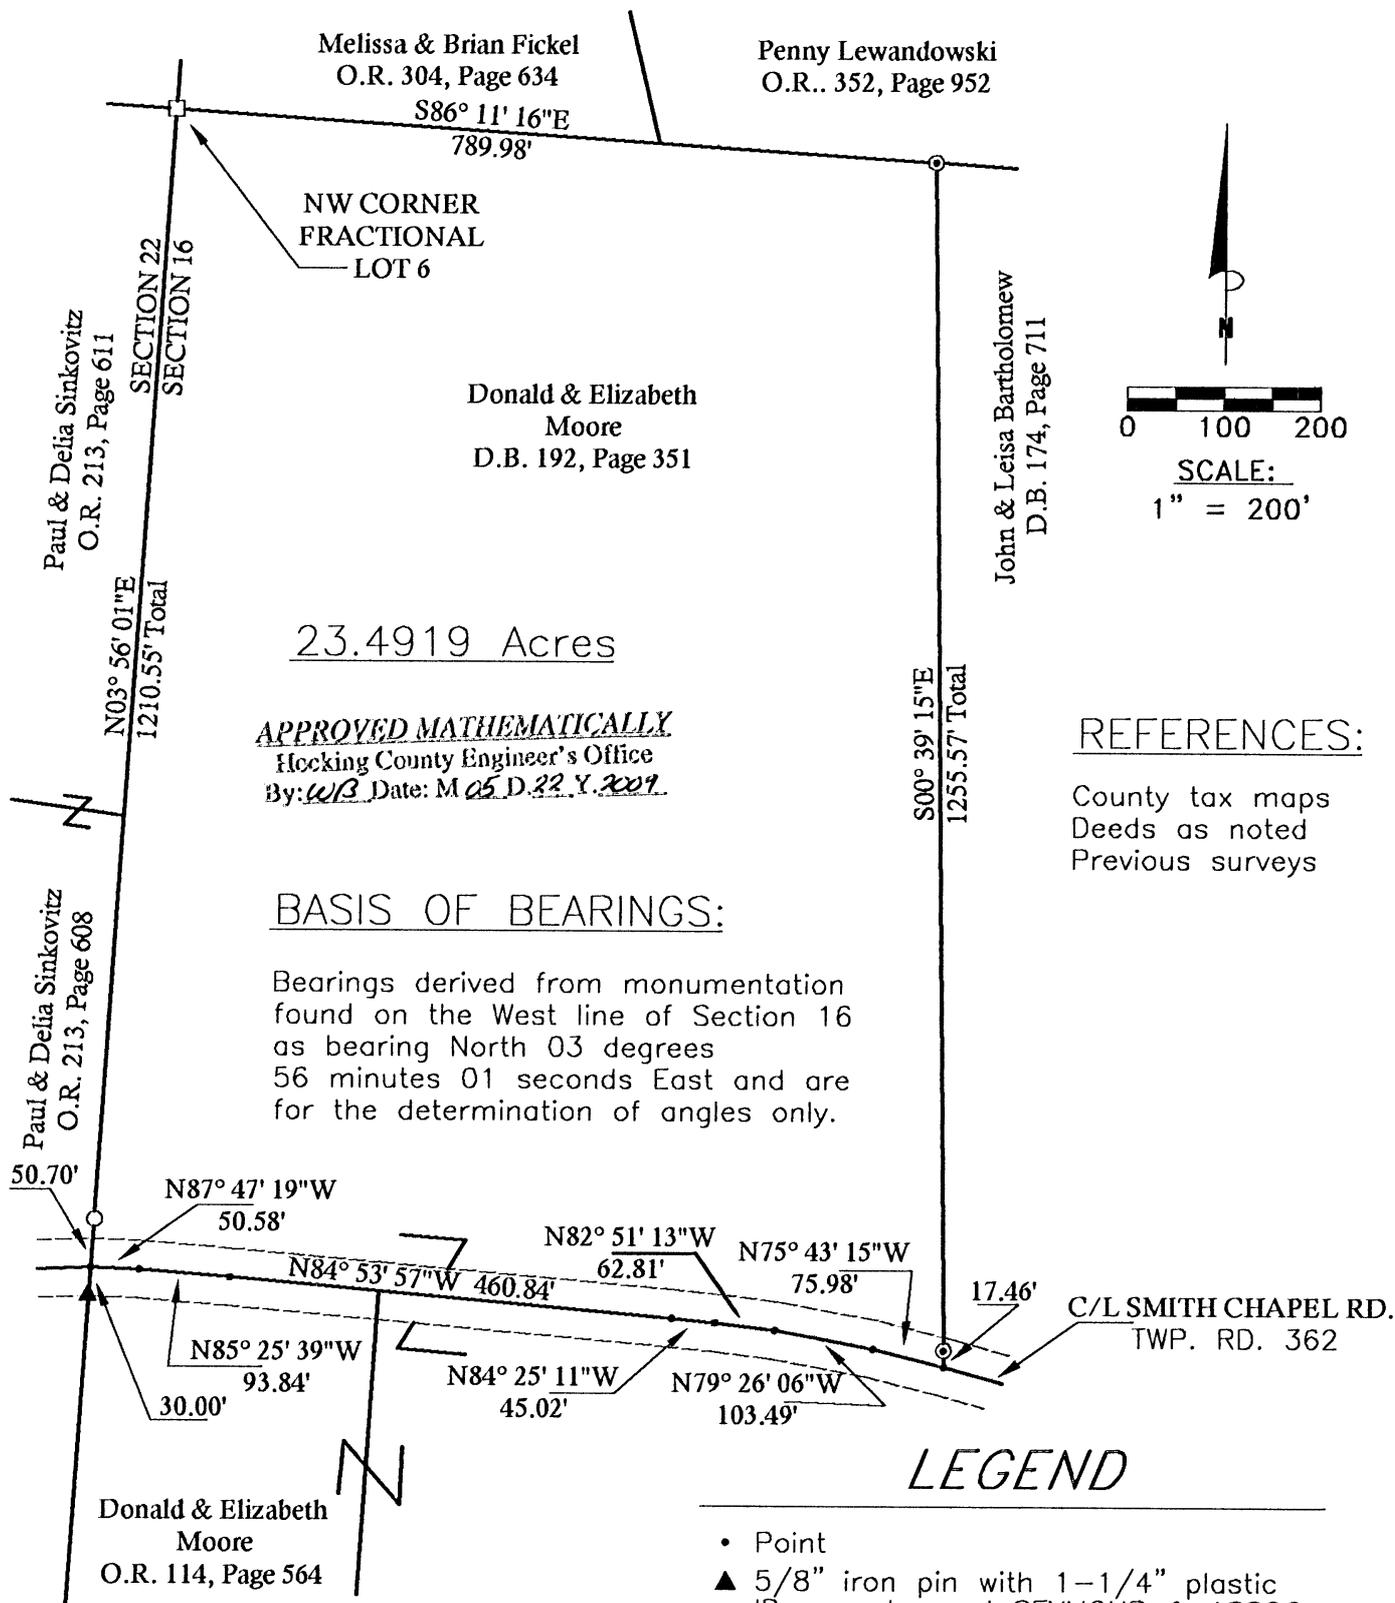

LEGEND

- Point
- ▲ 5/8" iron pin with 1-1/4" plastic ID cap stamped SEYMOUR & ASSOC. found
- 5/8" iron pin with plastic ID cap stamped LPG-6344 found
- ⊙ 5/8" iron pin found
- Stone found

George F. Seymour
 GEORGE F. SEYMOUR
 OHIO PROFESSIONAL SURVEYOR NO. 6044
 ©2009 SEYMOUR & ASSOCIATES

EXHIBIT "A"
23.4919 ACRE TRACT

Being a part of the tract of land that is now or formerly in the name of Donald & Elizabeth Moore as recorded in Deed Book 192 at page 351, Hocking County Recorder's Office, said tract being part of Fractional Lot 6 in the Southwest quarter of Section 16, T13N, R16W, Green Township, Hocking County, State of Ohio and being more particularly described as follows:

Beginning at a stone found on the northwest corner of Fractional Lot 6 in the Southwest quarter of Section 16;

Thence along the Grantor's North line, South 86 degrees 11 minutes 16 seconds East a distance of 789.98 feet to a 5/8" iron pin found;

Thence along the east line of the grantor, South 00 degrees 39 minutes 15 seconds East, passing through a 5/8" iron pin found at 1238.11 feet, going a total distance of 1255.57 feet to a point in the center of Smith Chapel Road (Twp. Rd. 362);


Thence along the center of Smith Chapel Road the following seven courses:


1. North 75 degrees 43 minutes 15 seconds West a distance of 75.98 feet to a point,
2. North 79 degrees 26 minutes 06 seconds West a distance of 103.49 feet to a point,
3. North 82 degrees 51 minutes 13 seconds West a distance of 62.81 feet to a point,
4. North 84 degrees 25 minutes 11 seconds West a distance of 45.02 feet to a point,
5. North 84 degrees 53 minutes 57 seconds West a distance of 460.84 feet to a point,
6. North 85 degrees 25 minutes 39 seconds West a distance of 93.84 feet to a point, and
7. North 87 degrees 47 minutes 19 seconds West a distance of 50.58 feet to a point on the west line of the grantor and the west line of Section 16 from which a 5/8" iron pin with a 1-1/4" plastic identification cap stamped "Seymour & Assoc." found bears North 03 degrees 56 minutes 01 seconds West a distance of 30.00 feet;

Thence leaving said road and along the west line of the grantor, North 03 degrees 56 minutes 01 seconds East, passing through a 5/8" iron pin with a 1-1/4" plastic identification cap stamped "LPG-6344" found at 50.70 feet, going a total distance of 1210.55 feet to the principal point of beginning, containing 23.4919 acres, more or less, and subject to the right of way of Smith Chapel Road and all easements of record pertaining to this tract.

The bearings used in this survey were derived from monumentation found on the West line of Section 16 as bearing, North 03 degrees 56 minutes 01 seconds East and are for the determination of angles only.

This description was prepared from a survey by George F. Seymour, Ohio Professional Surveyor No. 6044, in May of 2009.

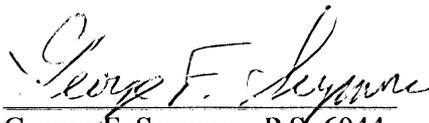
George F. Seymour, P.S. 6044

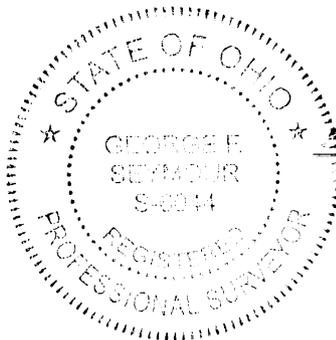

5-14-09
Date



APPROVED MATHEMATICALLY
Hocking County Engineer's Office
By WB Date: MAY 22, 2009

LEGEND

- 5/8" iron pin with 1-1/4" plastic ID cap stamped MPB found
- 5/8"x 30" (15" in roadway) iron pin with 1-1/4" plastic ID cap stamped LPG-6344 set
- Stone found
- ⊙ 1" iron pin found

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public roads

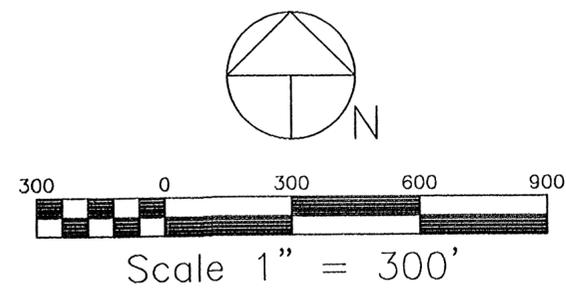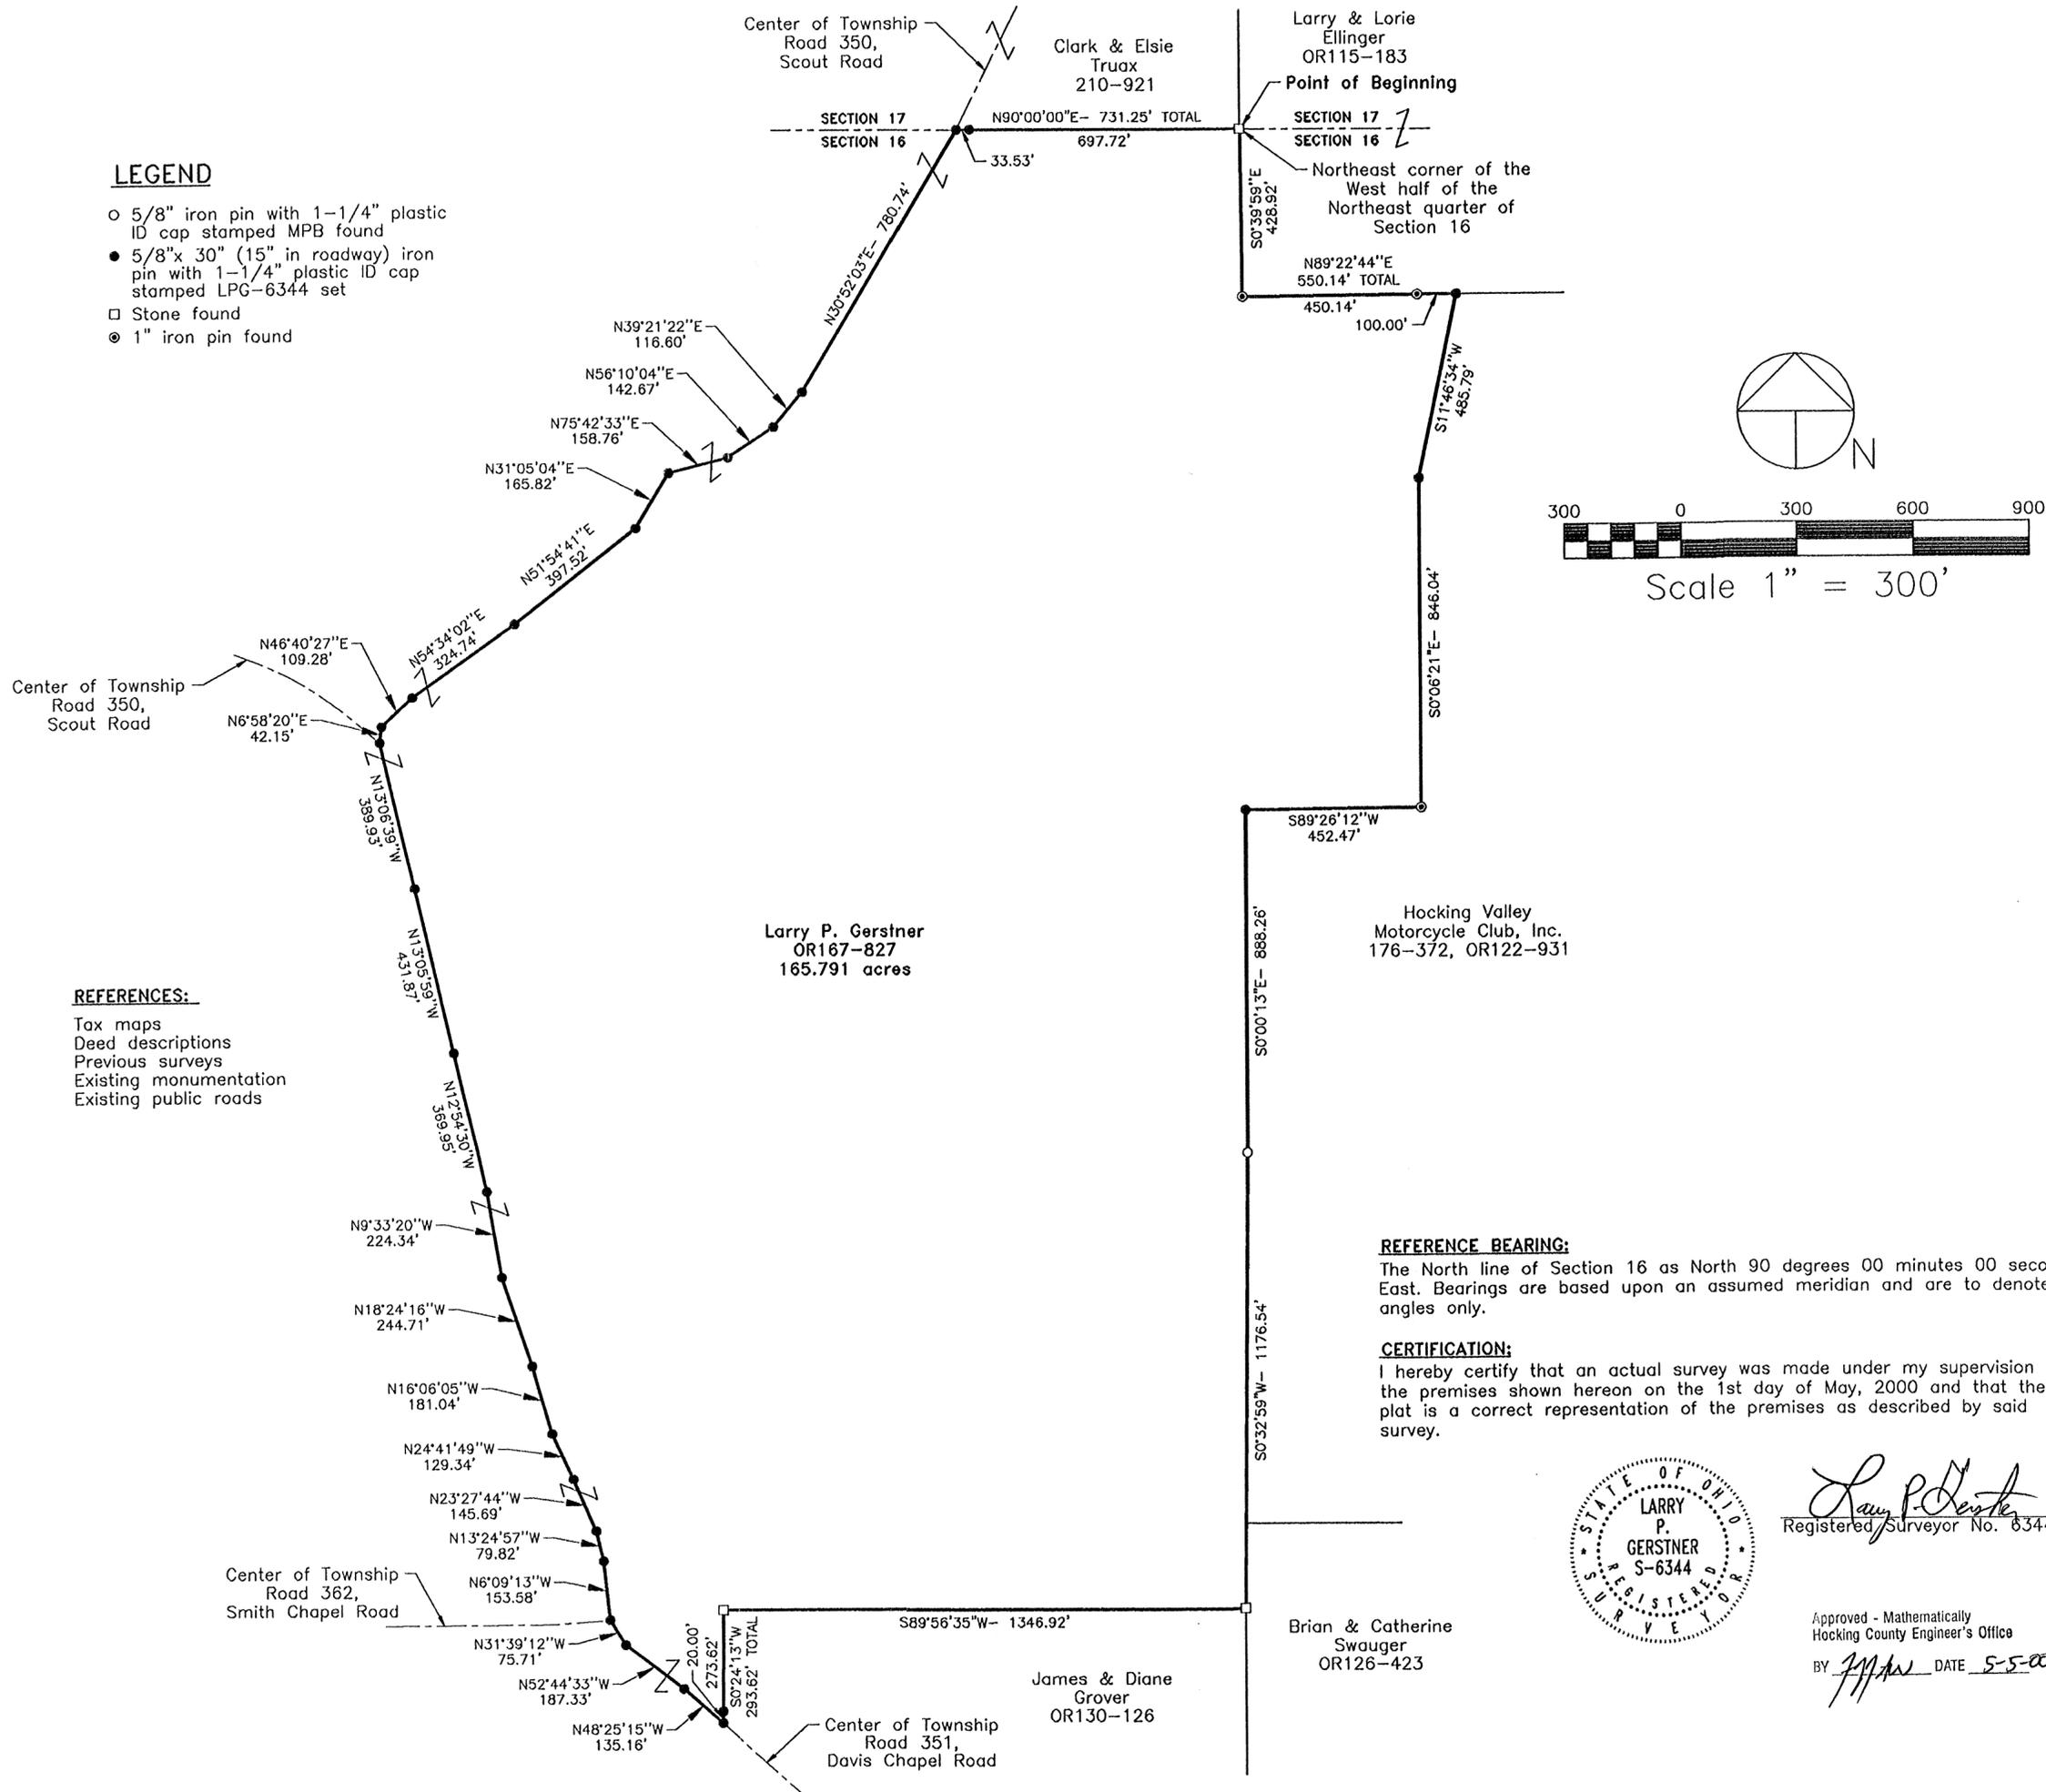

REFERENCE BEARING:
The North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only.

CERTIFICATION:
I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 1st day of May, 2000 and that the plat is a correct representation of the premises as described by said survey.



Larry P. Gerstner
Registered Surveyor No. 6344

Approved - Mathematically
Hocking County Engineer's Office
BY *JMA* DATE 5-5-00

LARRY P. GERSTNER
ENGINEERING & SURVEYING
9 East Second Street, Suite A, Logan, Ohio 43138
(740) 385-4260

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, part of the West half of the Northeast quarter of Section 16, part of the East half of the Southwest quarter of Section 16, Part of Fractional Lot 2 of Section 16, and all of Fractional Lot 3 of Section 16, all of Township 13, Range 16.

Plat of Survey

REVISIONS		
Scale: 1" = 00'		
JOB NO: 2001	DRAWN BY: 	DATE: 5-04-00
SHEET		

SURVEY DESCRIPTION OF A 165.791 ACRE TRACT FOR CHRISTOPHER CLAYPOOL

Situated in Green Township, Hocking County, Ohio; being part of the Northwest quarter of Section 16, part of the West half of the Northeast quarter of Section 16, part of the East half of the Southwest quarter of Section 16, part of Fractional Lot 2 of Section 16, and all of Fractional Lot 3 of Section 16, all of Township 13, Range 16; and being more particularly described as follows:

Beginning at a stone found at the Northeast corner of the West half of the Northeast quarter of Section 16; thence leaving the North line of Section 16 South 0 degrees 39 minutes 59 seconds East a distance of 428.92 feet to a 1" iron pin found;

thence North 89 degrees 22 minutes 44 seconds East a distance of 550.14 feet to a 5/8" iron pin set and passing a 1" iron pin found at a distance of 450.14 feet;

thence south 11 degrees 46 minutes 34 seconds West a distance of 485.79 feet to a 5/8" iron pin set;

thence South 0 degrees 06 minutes 21 seconds East a distance of 846.04 feet to a 1" iron pin found;

thence South 89 degrees 26 minutes 12 seconds West a distance of 452.47 feet to a 5/8" iron pin set;

thence South 0 degrees 00 minutes 13 seconds East a distance of 888.26 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped MPB found;

thence South 0 degrees 32 minutes 59 seconds West a distance of 1176.54 feet to a stone found;

thence South 89 degrees 56 minutes 35 seconds West a distance of 1346.92 feet to a stone found;

thence South 0 degrees 24 minutes 13 seconds West a distance of 293.62 feet to a 5/8" iron pin set in the center of Township Road 351, Davis Chapel Road, and passing a 5/8" iron pin set at a distance of 273.62 feet;

thence with the center of said Township Road 351 the following thirteen bearings and distances:

1) North 48 degrees 25 minutes 15 seconds West a distance of 135.16 feet to a 5/8" iron pin set;

2) North 52 degrees 44 minutes 33 seconds West a distance of 187.33 feet to a 5/8" iron pin set;

3) North 31 degrees 39 minutes 12 seconds West a distance of 75.71 feet to a 5/8" iron pin set at the intersection of Township Road 362, Smith Chapel Road;

4) leaving said Township Road 362 and continuing with said Township Road 351 North 6 degrees 09 minutes 13 seconds West a distance of 153.58 feet to a 5/8" iron pin set;

5) North 13 degrees 24 minutes 57 seconds West a distance of 79.82 feet to a 5/8" iron pin set;

6) North 23 degrees 27 minutes 44 seconds West a distance of 145.69 feet to a 5/8" iron pin set;

7) North 24 degrees 41 minutes 49 seconds West a distance of 129.34 feet to a 5/8" iron pin set;

8) North 16 degrees 06 minutes 05 seconds West a distance of 181.04 feet to a 5/8" iron pin set;

9) North 18 degrees 24 minutes 16 seconds West a distance of 244.71 feet to a 5/8" iron pin set;

10) North 9 degrees 33 minutes 20 seconds West a distance of 224.34 feet to a 5/8" iron pin set;

11) North 12 degrees 54 minutes 30 seconds West a distance of 369.95 feet to a 5/8" iron pin set;

12) North 13 degrees 05 minutes 59 seconds West a distance of 431.87 feet to a 5/8" iron pin set;

13) North 13 degrees 06 minutes 39 seconds West a distance of 389.93 feet to a 5/8" iron pin set at the intersection of Township Road 350, Scout Road;

thence leaving the center of said Township Road 351 and with the center of said Township Road 350 the following nine bearings and distances:

1) North 6 degrees 58 minutes 20 seconds East a distance of 42.15 feet to a 5/8" iron pin set;

2) North 46 degrees 40 minutes 27 seconds East a distance of 109.28 feet to a 5/8" iron pin set;

3) North 54 degrees 34 minutes 02 seconds East a distance of 324.74 feet to a 5/8" iron pin set;

4) North 51 degrees 54 minutes 41 seconds East a distance of 397.52 feet to a 5/8" iron pin set;

5) North 31 degrees 05 minutes 04 seconds East a distance of 165.82 feet to a 5/8" iron pin set;

6) North 75 degrees 42 minutes 33 seconds East a distance of 158.76 feet to a 5/8" iron pin set;

- 7) North 56 degrees 10 minutes 04 seconds East a distance of 142.67 feet to a 5/8" iron pin set;
- 8) North 39 degrees 21 minutes 22 seconds East a distance of 116.60 feet to a 5/8" iron pin set;
- 9) North 30 degrees 52 minutes 03 seconds East a distance of 780.74 feet to a 5/8" iron pin set on the North line of Section 16;

thence leaving the center of said Township Road 350 and with the North line of Section 16 North 90 degrees 00 minutes 00 seconds East a distance of 731.25 feet to the point of beginning, passing a 5/8" iron pin set at a distance of 33.53 feet, containing 165.791 acres more or less, and subject to the public easements of said Township Roads 350, 351, and 362 and any other public or private easements of record.

The above 165.791 acre survey is intended to describe part of the various tracts as deeded to Larry P. Gerstner, deed reference Volume OR167, Page 827, Hocking County Recorder's Office. This survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and existing public roads. The reference bearing for this survey is the North line of Section 16 as North 90 degrees 00 minutes 00 seconds East. Bearings are based upon an assumed meridian and are to denote angles only. All iron pins set by this survey are 5/8" by 30" (15" in roadway) and are capped by a 1-1/4" plastic identification cap stamped LPG-6344. The above described property was surveyed by Larry P. Gerstner, Ohio Registered Surveyor No. 6344, on May 1, 2000.

Approved - Mathematically
Hocking County Engineer's Office

LPG DATE 5-5-00

Larry P. Gerstner



Survey by:

Larry P. Gerstner - Engineering and Surveying
9 East Second Street, Suite A, Logan, Ohio 43138 385-4260

STARTING POINT
NW CORNER
OF NW 1/4
OF SW 1/4
OF SEC #16,
GREEN TWP.
HOCKING CO.
OHIO

S-84°26'40"E
788.85'

104-380
BOY SCOUTS
OF AMERICA
335.72 AC

S-84°26'40"E - 392.20'

103-102
MOHLER
77.773 AC

PLAT OF TRACT
TAKEN OUT OF
ZOATH MOHLER PROPERTY
BEING IN THE N.W. 1/4
OF THE SW 1/4 OF SEC #16
GREEN TOWNSHIP
T-13 R-16
HOCKING CO. OHIO
PT. - LOT # 6.
NOV. - 1979.
SCALE = 1" = 100'
DRAWN BY Robert Menne
CHECKED BY

10.99 ac. ±

LOT # 5
104-380

N-0°58'45"E - 1255.57' - TOTAL

S-5°38'00"W - 1310.40' - TOTAL

IP + 17.46
NAIL
N-72°57'W - 296.08'
17°00'
IP + 1292.50
N.N.L. & T.R. # 362

103-102



Approved - Mathematically
Hocking County Engineer's Office
By RB Date 11-5-79

Description of Survey of Property of Zoath Mohler

Being a part of Fractional Lot #6, in the Northwest Quarter of the Southwest Quarter of Section 16, Township 13, Range 16, Green Township, Hocking County, Ohio and described as follows:

From the Northwest Corner of the Northwest Quarter of the Southwest Quarter of Section 16, Township 13, Range 16, Green Township, Hocking County Ohio, *** South 84 degrees 26 minutes 40 seconds East 788.85 feet to an iron pin the place of beginning; thence continuing South 84 degrees 26 minutes 40 seconds East 392.20 feet to a stone, the Northeast Corner of Fractional Lot #6 and the Northwest Corner of Fractional Lot #5; thence South 5 degrees 38 minutes 08 seconds West 1310.40 feet to a nail in the Center of Township Road #362, passing an iron pin at 1292.50 feet; thence with the Center of said Township Road 362, North 72 degrees 59 minutes West 296.08 feet to a nail in the center of said Township Road 362; thence leaving said Road, North 0 degrees 58 minutes 45 seconds East 1255.57 feet to the place of beginning, passing an iron pin at 17.46 feet, * containing 10.*** Acres more or less and being subject to Legal Road Right-of-Way.

Surveyed by

Robert Moore

November 1979

Survey Checked by


J.A. Mathias
J.A. Mathias
S-3259

November 2, 1979.

Approved - Mathematically

Hocking County Engineer's Office

By *BA BW* Date *11-5-79*

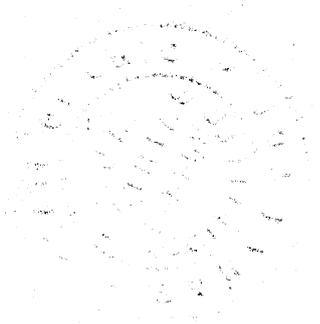

DESCRIPTION OF 4.1812 AC. TRACT

Being a part of a tract of land last transferred in Vol. 48, Pg. 283, Hocking Co. ~~OFFICIAL~~ Records, situated in the E 1/2 of the SE 1/4 of Sec. 16, Green Twp., T-13N, R-16W, Hocking Co., Ohio, and being more particularly described as follows:

Beginning at a stone monument found on the SW corner of said E 1/2 of the SE 1/4; Thence, with the west line of said E 1/2, N 0 degrees 11' 55" E a distance of 351.23 ft. to an iron pin set in the center of Twp. Rd. No. 351;

Thence with the center of said Twp. road the following eleven (11) courses:

- 1) S 62 degrees 43' 27" E a distance of 28.22 ft. to a point;
- 2) S 68 degrees 07' 40" E a distance of 121.51 ft. to a point;
- 3) S 71 degrees 27' 14" E a distance of 110.02 ft. to a point;
- 4) S 73 degrees 04' 54" E a distance of 73.63 ft. to a point;
- 5) S 80 degrees 03' 24" E a distance of 66.75 ft. to a point;
- 6) S 83 degrees 24' 52" E a distance of 146.12 ft. to a point;
- 7) S 77 degrees 48' 48" E a distance of 56.06 ft. to a point;
- 8) S 65 degrees 56' 49" E a distance of 56.70 ft. to a point;
- 9) S 57 degrees 30' 51" E a distance of 95.49 ft. to a point;
- 10) S 57 degrees 04' 44" E a distance of 90.57 ft. to a point;
- 11) S 57 degrees 33' 54" E, passing an iron pin found at 113.82 ft., going a total distance of 138.85 ft. to a point on the south line of Sec. 16;

Thence with said ~~south~~ line, N 89 degrees 53' 54" W a distance of 905.06 ft. to the place of beginning, containing 4.1812 acres, more or less, and being subject to the right-of-way of Twp. Rd. No. 351 and all valid easements.

Cited bearings are based on the bearing system of the 15.000 Ac. tract described in O.R. Vol. 41, Pg. 124.

All iron pins described as being set are 5/8" X 30" with an attached plastic identification cap.

The above description is the result of an actual survey made by Michael P. Berry, Ohio Registered Surveyor No. 6803, from June 18 to June 23, 1998.

Approved - Mathematically
Hocking County Engineer's Office

BY AW MMB DATE 8-11-98
Pending Health Dept Approval


Michael P. Berry #6803

APPROVED
LOGAN-HOCKING COUNTY
HEALTH DEPT.

Date 8-11-98 mhm

DESCRIPTION OF 60.000 AC. TRACT

Being a part of a tract of land last transferred in Vol. 48, Pg. 283, Hocking Co. Official Records, situated in the E 1/2 of the SE 1/4 of Sec. 16, T-13N, R-16W, part of Frac. Lot No. 9 of Sec. 10, T-13N, R-16W, and in part of Frac. Lot No. 2 of Sec. 9, Green Twp., T-13N, R-16W, Hocking Co., Ohio, and being more particularly described as follows:

Beginning at an iron pin set on the SE corner of said Sec. 16;

Thence, with the south line of said section, N 89 degrees 53' 54" W a distance of 428.73 ft. to a point in the center of Twp. Rd. No. 351;

Thence with the center of said Twp. road the following five (5) courses:

1) N 57 degrees 33' 54" W, passing an iron pin found at 25.03 ft., going a total distance of 138.85 ft. to a point;

2) N 57 degrees 04' 44" W a distance of 90.57 ft. to a point;

3) N 57 degrees 30' 51" W a distance of 95.49 ft. to a point;

4) N 65 degrees 56' 49" W a distance of 56.70 ft. to a point;

5) N 77 degrees 48' 48" W a distance of 36.07 ft. to a point;

Thence leaving Twp. Rd. 351 and with new lines the following eight (8) courses:

1) N 11 degrees 41' 27" E, passing an iron pin set at 20.25 ft., going a total distance of 81.72 ft. to an iron pin set;

2) N 32 degrees 11' 50" E a distance of 333.54 ft. to an iron pin set;

3) N 7 degrees 38' 48" E a distance of 193.23 ft. to an iron pin set;

4) N 2 degrees 06' 58" E a distance of 273.68 ft. to an iron pin set;

5) N 9 degrees 08' 27" W a distance of 291.24 ft. to an iron pin set;

6) N 10 degrees 21' 43" W a distance of 298.76 ft. to an iron pin set;

7) N 7 degrees 31' 41" W a distance of 249.70 ft. to an iron pin set;

8) N 89 degrees 51' 56" W a distance of 635.21 ft. to an iron pin set on the west line of said E 1/2 of the SE 1/4;

Thence with the boundaries of said E 1/2 the following three (3) courses:

1) N 0 degrees 11' 32" E a distance of 956.56 ft. to an iron pin set;

2) S 89 degrees 53' 17" E a distance of 1334.31 ft. to an iron pin set;

3) S 0 degrees 12' 23" W a distance of 2042.04 ft. to a point, said point being referenced by an iron pin set which bears N 89 degrees 36' 03" W a distance of 7.79 ft.;

Thence, passing into Sec. 10 and with the north line of Frac. Lot No. 9, S 89 degrees 36' 03" E a distance of 320.10 ft. to an iron pin set;

Thence, passing into Sec. 9, S 17 degrees 15' 20" W a distance of 1091.76 ft. to an iron pin set on the west line of said section;

Thence, with said west line, N 0 degrees 12' 23" E a distance of 268.71 ft. to the place of beginning, containing 0.2543 acre in Sec. 9, 3.5847 acres in Sec. 10, and 56.161 acres in Sec. 16, making a total of 60.000 acres, more or less, and being subject to the right-of-way of Twp. Rd. No. 351 and all valid easements.


Cited bearings are based on the bearing system of the 15.000 Ac. tract described in O.R. Vol. 41, Pg. 124;

All iron pins described as being set are 5/8" X 30" with an attached plastic identification cap.

The above description is the result of an actual survey made by Michael P. Berry, Ohio Registered Surveyor No. 6803, from June 18 to June 23, 1998.

Approved - Mathematically
Hocking County Engineer's Office

BY MAW DATE 6-24-98

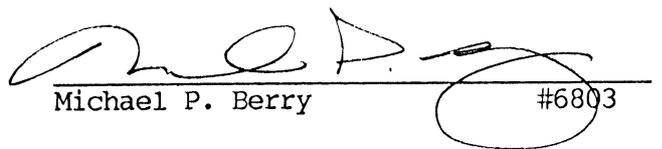
Michael P. Berry #6803

DESCRIPTION OF 25.9675 AC. TRACT

Being a part of a tract of land last transferred in Vol. 48, Pg. 283, Hocking Co. ~~OFFICIAL~~ Records, situated in the E 1/2 of the SE 1/4 of Sec. 16, Green Twp., T-13N, R-16W, Hocking Co., Ohio, and being more particularly described as follows:

Beginning at an iron pin set at the intersection of the center of Twp. Rd. No. 351 with the west line of the E 1/2 of the SE 1/4 of Sec. 16, said pin being referenced by a stone monument found on the SW corner of said E 1/2 which bears S 0 degrees 11' 55" W a distance of 351.23 ft.;

Thence, with said west line, N 0 degrees 11' 55" E a distance of 1290.31 ft. to a stone monument found;

Thence, continuing with said west line, N 0 degrees 11' 32" E a distance of 220.32 ft. to an iron pin set;

Thence with a series of new lines the following eight (8) courses:

- 1) S 89 degrees 51' 56" E a distance of 635.21 ft. to an iron pin set;
- 2) S 7 degrees 31' 41" E a distance of 249.70 ft. to an iron pin set;
- 3) S 10 degrees 21' 43" E a distance of 298.76 ft. to an iron pin set;
- 4) S 9 degrees 08' 27" E a distance of 291.24 ft. to an iron pin set;
- 5) S 2 degrees 06' 58" W a distance of 273.68 ft. to an iron pin set;
- 6) S 7 degrees 38' 48" W a distance of 193.23 ft. to an iron pin set;
- 7) S 32 degrees 11' 50" W a distance of 333.54 ft. to an iron pin set;
- 8) S 11 degrees 41' 27" W, passing an iron pin set at 61.47 ft., going a total distance of 81.72 ft. to a point in the center of Twp. Rd. No. 351;

Thence with the center of said Twp. road the following seven (7) courses:

- 1) N 77 degrees 48' 48" W a distance of 19.99 ft. to a point;
- 2) N 83 degrees 24' 52" W a distance of 146.12 ft. to a point;
- 3) N 80 degrees 03' 24" W a distance of 66.75 ft. to a point;
- 4) N 73 degrees 04' 54" W a distance of 73.63 ft. to a point;
- 5) N 71 degrees 27' 14" W a distance of 110.02 ft. to a point;
- 6) N 68 degrees 07' 40" W a distance of 121.51 ft. to a point;
- 7) N 62 degrees 43' 27" W a distance of 28.22 ft. to the place of beginning, containing 25.9675 acres, more or less, and being subject to the right-of-way of Twp. Rd. No. 351 and all valid easements.

Cited bearings are based on the bearing system of the 15.000 Ac. tract described in O.R. Vol. 41, Pg. 124.

All iron pins described as being set are 5/8" X 30" with an attached plastic identification cap.

The above description is the result of an actual survey made by Michael P. Berry, Ohio Registered Surveyor No. 6803, from June 18 to June 23, 1998.

Approved - Mathematically
Hocking County Engineer's Office

BY fy MB DATE 8-11-98


Michael P. Berry #6803

EXHIBIT A
DEAN to SWAUGER

George F. Seymour

830 West Hunter Street
Logan, Ohio 43138
740-385-4349
FAX: 740-385-5954




SURVEYING
MAPPING

email: seysurv@hocking.net



PLAT OF SURVEY

SITUATED IN THE STATE OF OHIO,
COUNTY OF HOCKING
TOWNSHIP OF GREEN,
SECTION 16, IN THE SW 1/4, FRAC.
LOT 6 PT.
T-13-N, R-16-W

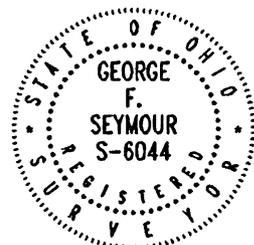

FOR: **JOHN & LEISA BARTHOLOMEW**


JOB #:
616101

DRAWN BY:
GFS

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM AN ACTUAL FIELD SURVEY OF THE PREMISES IN OCTOBER OF 2010 FROM EXISTING PUBLIC RECORDS. THIS CERTIFICATION WAS MADE BY ME ON THIS 21st DAY OF OCTOBER, 2010.


REFERENCES:

County tax maps
Deeds as noted
Previous surveys

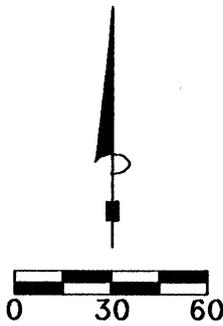

SCALE:
1" = 60'

APPROVED MATHEMATICALLY
Hocking County Engineer's Office
By: CW Date: M.10 D.22 Y.2010

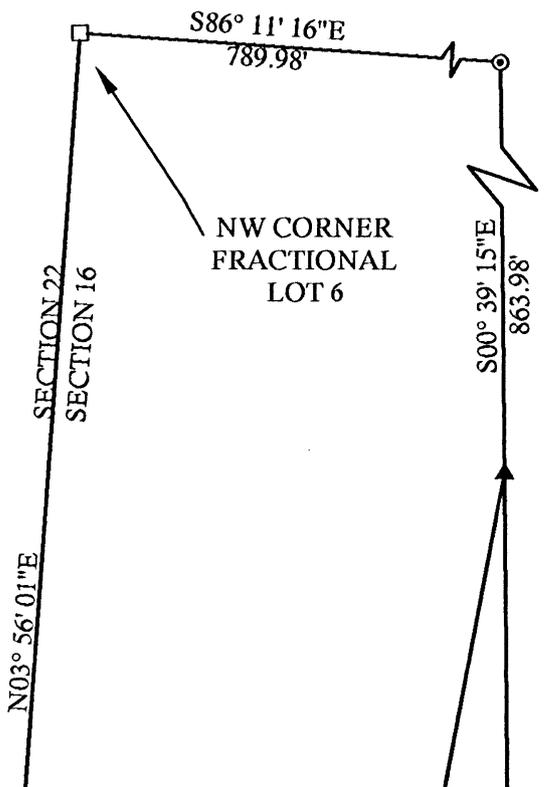


BASIS OF BEARINGS:

Bearings derived from monumentation found on the West line of Section 16 as bearing North 03 degrees 56 minutes 01 seconds East and are for the determination of angles only.

LEGEND

- Point
- ▲ 5/8"X30" iron pin with 1-1/4" plastic ID cap stamped PS-6044 set
- Stone found
- ⊙ 5/8" iron pin found

CONDITIONAL APPROVAL
Not to transfer separately without
Appropriate Approvals.
Note:

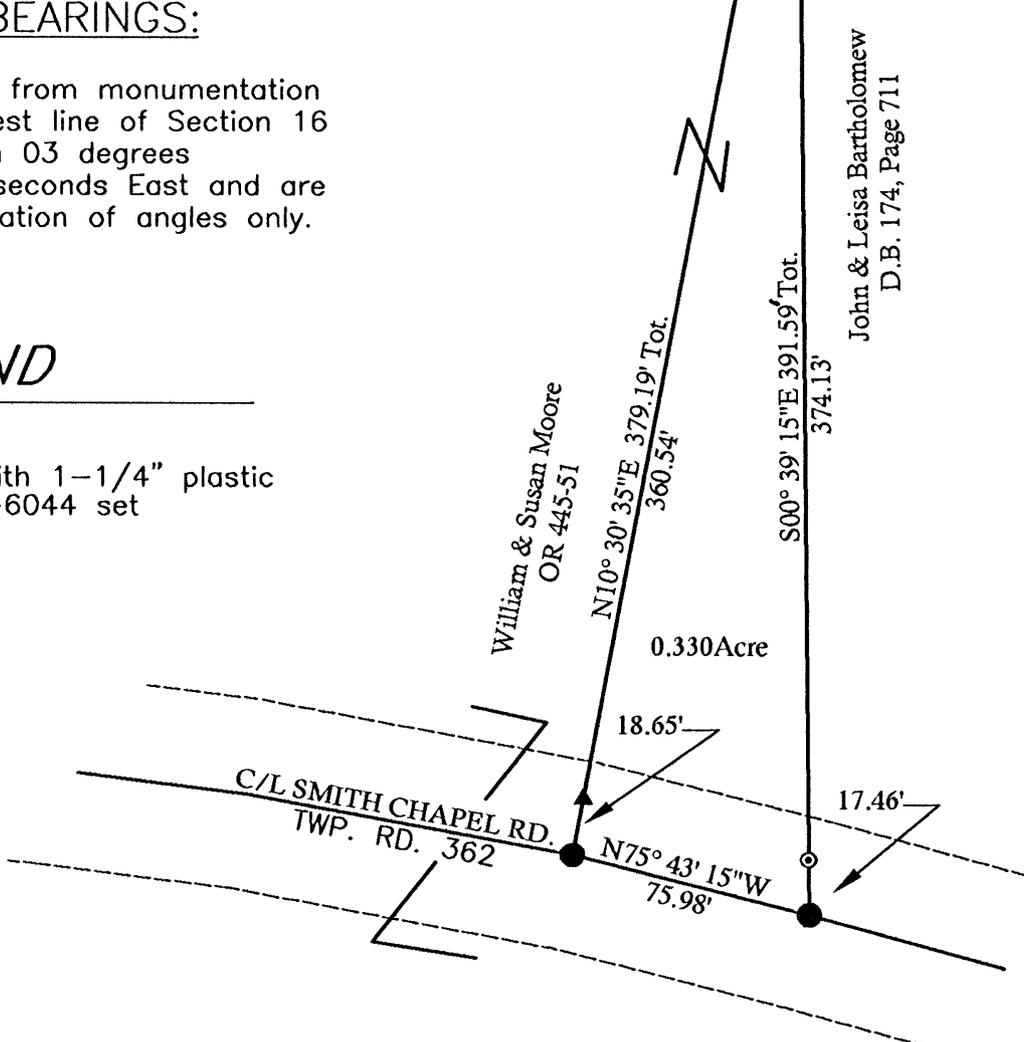

John & Leisa Bartholomew
D.B. 174, Page 711

George F. Seymour

GEORGE F. SEYMOUR
OHIO PROFESSIONAL SURVEYOR NO. 6044

©2010 SEYMOUR & ASSOCIATES

EXHIBIT "A"
0.330 ACRE TRACT

Being a part of the tract of land that is now or formerly in the name of William & Susan Moore as recorded in Official Record 445 at page 51, Hocking County Recorder's Office, said tract being part of Fractional Lot 6 in the Southwest quarter of Section 16, T13N, R16W, Green Township, Hocking County, State of Ohio and being more particularly described as follows:

Beginning, for reference at a stone found on the northwest corner of Fractional Lot 6 in the Southwest quarter of Section 16;

Thence along the Grantor's North line, South 86 degrees 11 minutes 16 seconds East a distance of 789.98 feet to a 5/8" iron pin found;

Thence along the east line of the grantor, South 00 degrees 39 minutes 15 seconds East a distance of 863.98 feet to a 5/8" iron pin set for the principal point of beginning;

Thence continuing along the east line of the grantor, South 00 degree 39 minutes 15 seconds East, passing through a 5/8" iron pin found at 374.13 feet, going a total distance of 391.59 feet to a point in the center of Smith Chapel Road (Twp. Rd. 362);

Thence along the center of Smith Chapel Road North 75 degrees 43 minutes 15 seconds West a distance of 75.98 feet to a point,

Thence leaving said road North 10 degrees 30 minutes 35 seconds East, passing through a 5/8" iron pin set at 18.65 feet, going a total distance of 379.19 feet to the principal point of beginning, containing 0.330 acre, more or less, and subject to the right of way of Smith Chapel Road and all easements of record pertaining to this tract.


The bearings used in this survey were derived from monumentation found on the West line of Section 16 as bearing, North 03 degrees 56 minutes 01 seconds East and are for the determination of angles only.

This tract is to be held in continuous and contiguous ownership with the tract as recorded in Deed Book 174 at page 711 and not to be used as a separate building site.

The iron pins set in this survey are 5/8" x 30" with a 1-1/4" plastic identification cap stamped P.S.-6044.

This description was prepared from a survey by George F. Seymour, Ohio Professional Surveyor No. 6044, in October of 2010.


George F. Seymour, P.S. 6044

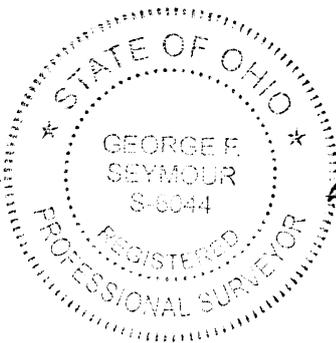


10-21-10
Date

APPROVED MATHEMATICALLY
Hocking County Engineer's Office
By: CW Date: M. 10 D. 22 Y. 2010

CONDITIONAL APPROVAL
Not to transfer separately without
Appropriate Approvals.
Note: _____

PLAT OF A 33.539 ACRE TRACT

Situated in Green Township, Hocking County, Ohio; being part of the south half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16.

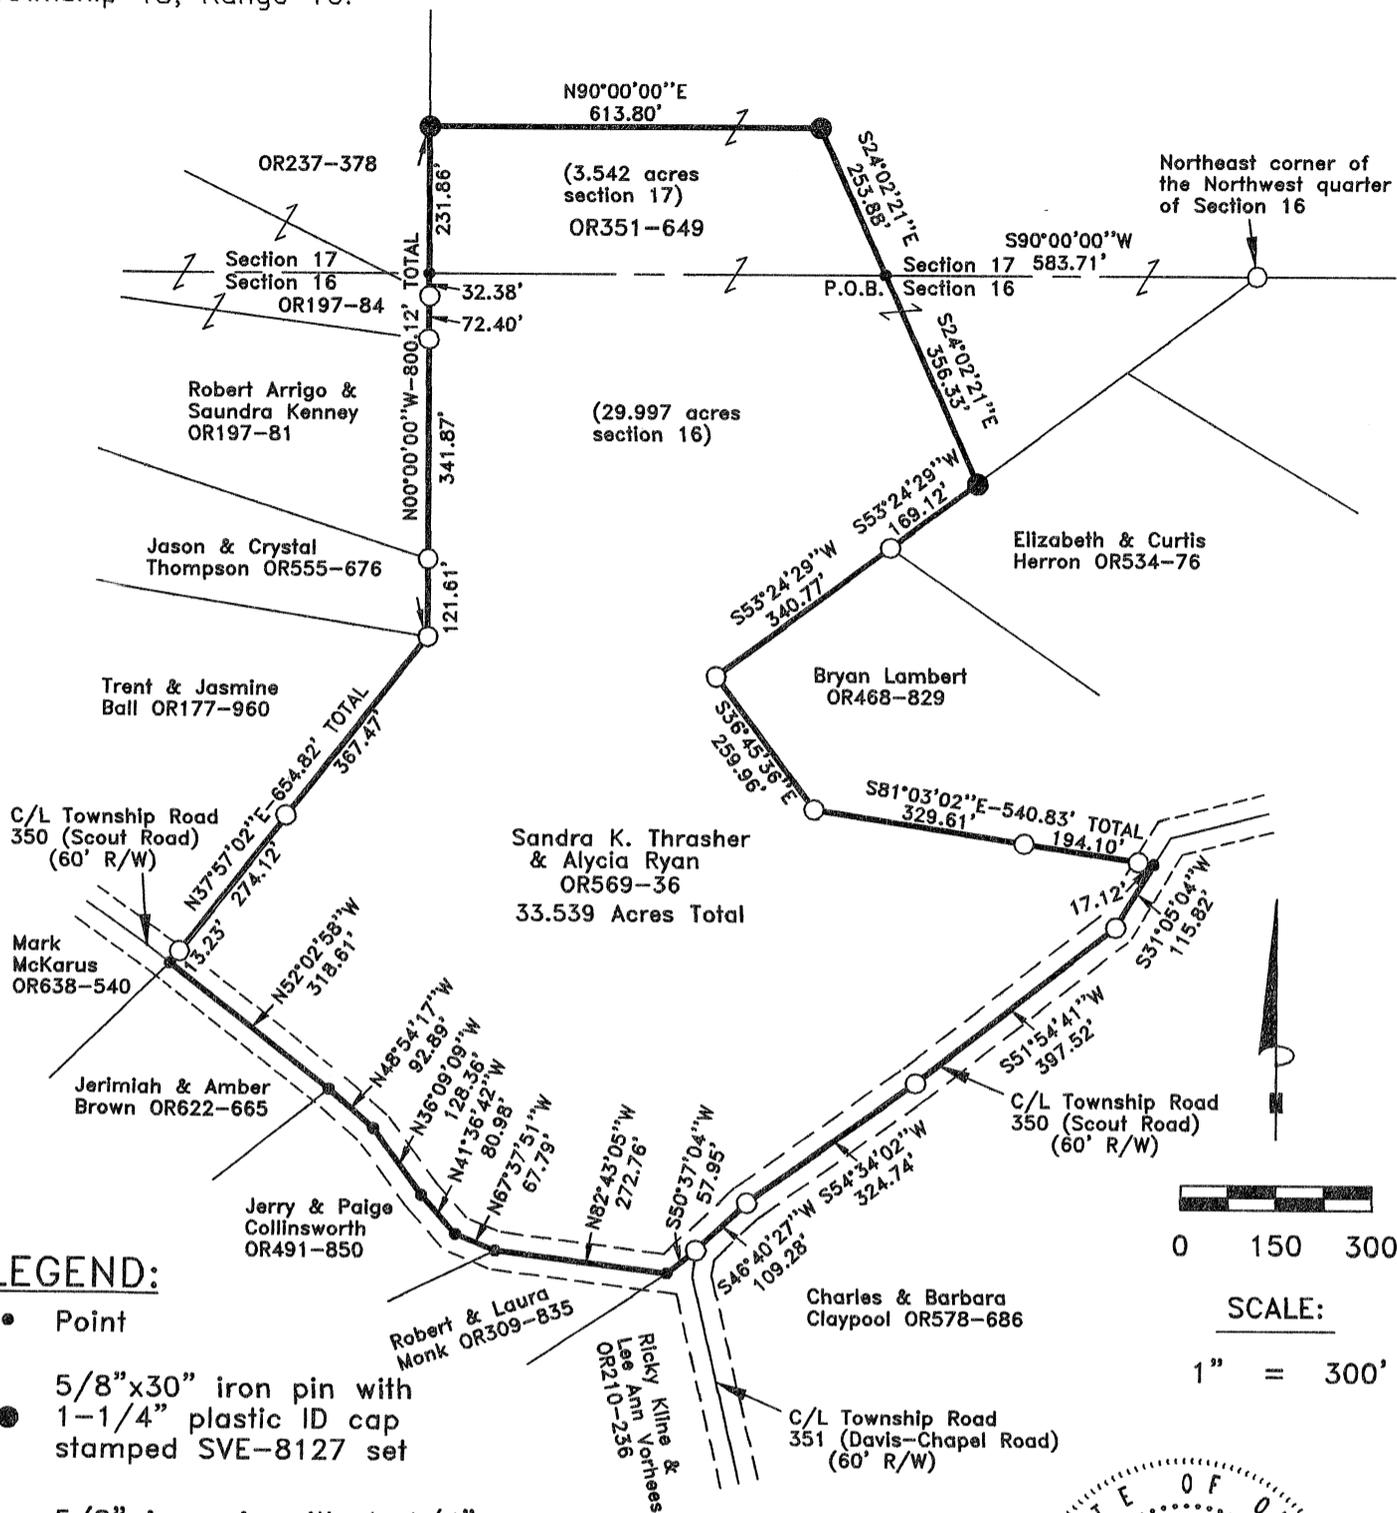

LEGEND:

- Point
- 5/8"x30" iron pin with 1-1/4" plastic ID cap stamped SVE-8127 set
- 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found
- Boundary Line
- - - Adjacent Boundary Line
- - - Road Right of Way

REFERENCES:

- Tax maps
- Deed descriptions
- Previous surveys
- Existing monumentation
- Existing public road

REFERENCE BEARING:

The north line of Section 16 as North 00 degrees 00 minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.



CERTIFICATION:

I hereby certify that an actual survey was made under my supervision of the premises shown hereon on the 16th day of August, 2021 and that the plat is a correct representation of the premises as described by said survey.

APPROVED MATHEMATICALLY
 Hocking County Engineer's Office
 By: *[Signature]* Date: M. 9 D. 21 21

[Signature]
 Registered Surveyor No. 8127

Survey by: S. Vince Evans Surveying — S. Vince Evans P.S. 8127
 64103 Woodgeard Road, Creola, Ohio 45622
 Phone (740) 380-3884
 FAX (740) 596-5831

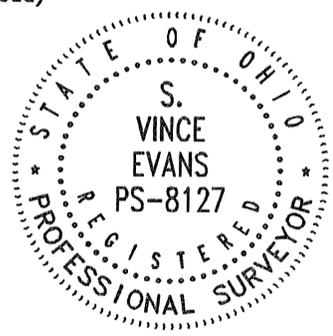

SURVEY DESCRIPTION OF A 33.539 ACRE TRACT

Situated in Green Township, Hocking County, Ohio; being part of the south half of the Southwest quarter of Section 17 and part of the Northwest quarter of Section 16, both of Township 13, Range 16; and being more particularly described as follows:

Being part of a 32.177 acre tract as described in Volume OR569, Page 36 to Sandra K. Thrasher and Alycia Ryan; being part of a 37.648 acre tract as described in Volume OR351, Page 649 to Sandra K. Thrasher and Alycia Ryan.

Commencing at a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the Northeast corner of the Northwest quarter of Section 16;

Thence with the north line of Section 16, South 90 degrees 00 minutes 00 seconds West a distance of 583.71 feet to a Point, and being the point of **Beginning** of the tract of land to be described;

Thence leaving the north line of Section 16, South 24 degrees 02 minutes 21 seconds East a distance of 356.33 feet to a 5/8" iron pin set;

Thence South 53 degrees 24 minutes 29 seconds West a distance of 169.12 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

Thence South 53 degrees 24 minutes 29 seconds West a distance of 340.77 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

Thence South 36 degrees 45 minutes 36 seconds East a distance of 259.96 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

Thence South 81 degrees 03 minutes 02 seconds East a distance of 540.83 feet to a Point in the centerline of Township Road 350 (Scout Road)(60' R/W), passing 5/8" iron pins with 1-1/4" plastic ID caps stamped LPG-6344 found at distances of 329.61 feet and 523.71 feet;

Thence with the centerline of Township Road 350 (Scout Road), the following 11 bearings and distances:

1) South 31 degrees 05 minutes 04 seconds West a distance of 115.82 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

2) South 51 degrees 54 minutes 41 seconds West a distance of 397.52 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

3) South 54 degrees 34 minutes 02 seconds West a distance of 324.74 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found;

4) South 46 degrees 40 minutes 27 seconds West a distance of 109.28 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found at the end of Township Road 351 (Davis-Chapel Road)(60' R/W);

5) South 50 degrees 37 minutes 04 seconds West a distance of 57.95 feet to a Point;

6) North 82 degrees 43 minutes 05 seconds West a distance of 272.76 feet to a Point;

7) North 67 degrees 37 minutes 51 seconds West a distance of 67.79 feet to a Point;

8) North 41 degrees 36 minutes 42 seconds West a distance of 80.98 feet to a Point;

9) North 36 degrees 09 minutes 09 seconds West a distance of 128.36 feet to a Point;

10) North 48 degrees 54 minutes 17 seconds West a distance of 92.89 feet to a Point;

11) North 52 degrees 02 minutes 58 seconds West a distance of 318.61 feet to a Point;

Thence leaving the centerline of Township Road 350 (Scout Road), North 37 degrees 57 minutes 02 seconds East a distance of 654.82 feet to a 5/8" iron pin with 1-1/4" plastic ID cap stamped LPG-6344 found, passing 5/8" iron pins with 1-1/4" plastic ID caps stamped LPG-6344 found at distances of 13.23 feet and 287.35 feet;

Thence North 00 degrees 00 minutes 00 seconds West a distance of 800.12 feet to a 5/8" iron pin set, passing 5/8" iron pins with 1-1/4" plastic ID caps stamped LPG-6344 found at distances of 121.61 feet, 463.48 feet and 535.88 feet, and passing a Point on the north line of Section 16 at a distance of 568.26 feet;

Thence North 90 degrees 00 minutes 00 seconds East a distance of 613.80 feet to a 5/8" iron pin set;


Thence South 24 degrees 02 minutes 21 seconds East a distance of 253.88 feet to the point of beginning and containing 33.539 acres (29.997 acres in section 16 and 3.542 acres in section 17), more or less, subject to any public or private easements of record.

The above 33.539 acre survey was based upon information obtained from tax maps, deed descriptions, previous surveys, existing monumentation, and an existing public road. The reference bearing for this survey is the north line of Section 16 as South 90 degrees 00

minutes 00 seconds West. Bearings are based upon an assumed meridian and are to denote angles only.


All iron pins set by this survey are 5/8" by 30" and are capped by a 1-1/4" plastic identification cap stamped "SVE-8127".

The above described property was surveyed by S. Vince Evans, Ohio Registered Surveyor No. 8127, on August 16, 2021.



S. Vince Evans, P. S. 8127

Survey by: S. Vince Evans Surveying
S. Vince Evans, P. S. 8127
64103 Woodgeard Road
Creola, Ohio 45622
Phone (740) 380-3884
FAX (740) 596-5831

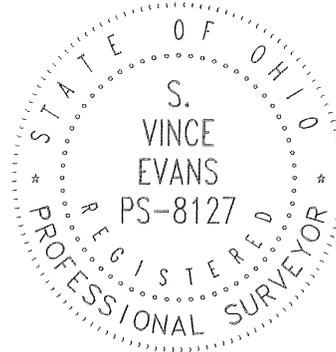

APPROVED MATHEMATICALLY
Hocking County Engineer's Office
By:  Date: M. 9 D. 21 21