

50686

WARD 2, 3  
②+9

RECEIVED IN HOCKING COUNTY, OHIO  
at 10:16 O'CLOCK A M  
RECORDED 19  
RECORD 647 VOL. 1 PAGE 1032

MAR 18 1975

R9-7100-86 (4-4-73) GPO 802-755

Donna R. Leach

RECORDER - HOCKING COUNTY  
LOGAN, OHIO 43138

State of Ohio

County of Hocking

CERTIFIED LAND CORNER RESTORATION

ss.

I, James R. Hann, do hereby certify that on the 5 day of February, 1975, I found evidence of the Common Section corner of FR 3, S3, S8, S2 Township 13 North, Range 15 West, Ohio River Survey, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:  
Original corner believed to have been established by John Mathewson in 1797.

Corner re-established by Levi Davis survey of township 13 range 15 in 1870. Established following bearing trees: 10 inch White Oak N32°W 99 links, 20 inch Red Oak S36°W 150 links.


In 1937 Forest Service Surveyor Singleton found this corner to be marked by a stone. Established following bearing trees: 16 inch Tulip Poplar S34°W 45.2 feet, 10 inch Walnut S72°E 32.7 feet, 3 inch Oak N88°W 38.9 feet.

Description of corner evidence found:  
Found set stone with an 'X'. Also, found 10 inch Walnut (down) S72°E 33 feet, and a 24 inch Tulip Poplar S34°W 45.5 feet. These are bearing trees from the 1937 Forest Service survey. Also found metal sign on a Hickory west 21 feet corner position is further verified by examining aerial photos of the area.


Description of monument and accessories I established to perpetuate the original location of this corner:  
Set 2 inch x 48 inch iron pipe filled with concrete with a brass cap on top adjacent to and 0.6 feet south of 'X' on stone. Established following bearing trees:

Hickory	7 inch	N62°E	10.4 feet
Tulip Poplar	24 inch	S34°W	45.5 feet
White Oak	14 inch	N28°W	39.8 feet

Brass Cap Reads



Bearing trees are blazed and have signs attached.

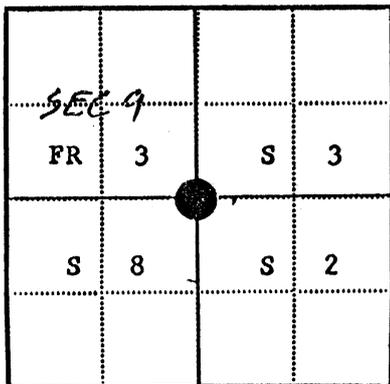

● - Corner monument restored  
□ -

Resident witnesses.....

Dated at ..... Ohio, this ..... day of ..... 19.....

Signature *James R. Hann* Title Registered Surveyor  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S6010

Office of.....County of.....  
I hereby certify that the within instrument was filed in this office for record on the.....day of.....19....., and was filed in Book No.....Page No.....of County Records.

Signature.....Title.....

Township....., Range....., Section....., Index No....., Page No.....